

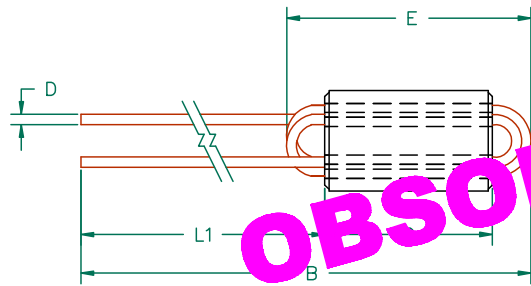


SCALE DRAWING 1:1




OBSOLETE

ELECTRICAL TESTING

TEST:	Z	Z
FREQUENCY	25 MHz	100 MHz
NOMINAL	605 Ω	998 Ω
MINIMUM	454 Ω	749 Ω
MAXIMUM	-	-

UNCONTROLLED DOCUMENT

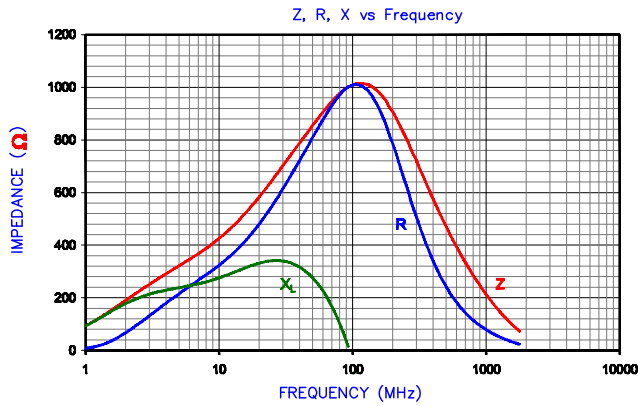

AGILENT E4991A RF Impedance/Material Analyzer
HP 16194A Test Fixture

NOTES:

1. WIRE: 3 TURNS, COPPER 24 AWG 0.51 [.020] DIA.
2. PLATING: 100% TIN $5\mu \pm 2\mu$ [$200\mu\text{in} \pm 80\mu\text{in}$]
3. REF. STEWARD CORE P/N 28C0236-000.
4. LEADS:
A. LEADS SOLDERABILITY CONFORMS TO MIL-STD-202F, METHOD 208F.
5. WEIGHT/1000 1.22 kgs. 2.7 lbs.

DIMENSIONS:

A	6.00 [.236]	+	0.20 [.008]
B	50.53 [1.990]	+	3.18 [.125]
C	10.0 [.394]	+	0.25 [.010]
D	24 AWG TCW	+	-
E	14.61 [.575]	+	TYP.
L1	38.1 [1.50]	+	3.18 [.125]

DIMENSIONS ARE IN mm (INCHES).			
J	REMOVE MAX. Z SPEC @ 100 MHZ	04/26/07	JRK
H	UPDATE COMPANY LOGO	04/16/07	JRK
G	CHG A DIMS. & TOLS. ADD ROHS SYMB.	02/20/07	JRK
F	CORRECT NOTE 5	07/07/05	JRK
E	CHG P/N TO -10, REVISE NOTES 2&5	10/07/03	JRK
D	UPDATE PRINT FORMAT, UPDATE TOLS ADD Z, R, XL CURVE, UPDATE NOTES	01/11/02	JRK
C	UPDATE PRINT FORMAT	10/24/97	DTR
B	UPDATED P/N FOR NEW CATALOG	11/21/95	JBE
REV	DESCRIPTION	DATE	INT

THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY AND CONFIDENTIAL TO STEWARD. NO PRODUCTION OR PUBLICATION OF THIS DOCUMENT IN WHOLE OR IN PART SHALL BE MADE WITHOUT WRITTEN AUTHORIZATION FROM STEWARD.



PROJECT/PART NUMBER:	REV	PART TYPE:	DRAWN BY:
28C0236-0EW-10	J	MULTI-TURN AXIAL BEAD	JAZ
DATE:	SCALE:	MATERIAL:	
07/08/93	-	NiZn Ferrite	
CAD #	TOOL #		
28C0236-0EW-10-J	C0236		