


Z, R, X vs Frequency

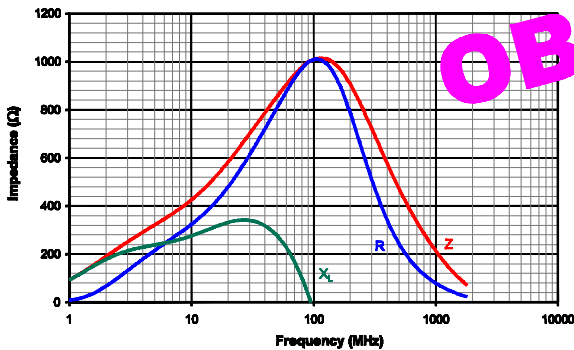

OBSOLETE

ELECTRICAL TESTING

TEST:	Z	Z
# TURNS	3	3
AWG	#24	#24
FREQUENCY	25 MHz	100 MHz
NOMINAL	605 Ω	998 Ω
MINIMUM	- Ω	749 Ω
MAXIMUM	- Ω	- Ω

NOTES:

1. WIRE: COPPER 24 AWG 0.51 [.0201] DIAMETER.
2. PLATING: 100% TIN $5\mu \pm 2\mu$ [$200\mu\text{in} \pm 80\mu\text{in}$]
3. LEADS:
 - A. LEADS SOLDERABILITY CONFORMS TO MIL-STD-202, METHOD 208.
4. REF. STEWARD CORE P/N 28C0236-000.
5. WEIGHT/1000 1.22 kgs. 2.7 lbs.

DIMENSIONS:

A	6.00 [.236]	±	0.13 [.005]
B	20.96 [.825]		MAX
C	10.01 [.394]	±	0.25 [.010]
D	0.51 [.020]		TYP.
E	15.90 [.625]		MAX.
F	5.08 [.200]	±	0.64 [.025]
L1	5.08 [.200]	±	1.27 [.050]

DIMENSIONS ARE IN mm [INCHES].				THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY AND CONFIDENTIAL TO STEWARD. NO PRODUCTION OR PUBLICATION OF THIS DOCUMENT IN WHOLE OR IN PART SHALL BE MADE WITHOUT WRITTEN AUTHORIZATION FROM STEWARD.			
N	CHG TOLS ON B DIM TO MAX	04/06/06	JRK	<h1>Steward</h1>			
M	CORRECT NOTE 5	07/07/05	JRK				
L	CHG P/N TO -10 REV NOTE 2 ADD NOTE 5	10/07/03	JRK	PROJECT/PART NUMBER:	REV	PART TYPE:	DRAWN BY:
K	CHANGE DIM F TO L1, CHANGE DIM G TO F	09/23/02	JRK	28C0236-0JW-10	N	ASSEMBLY	DJB
J	UPDATE FORMAT PRINT FOR ELECTRONIC DATABASE UPDATE NOTES	01/08/02	TMB	DATE:	SCALE:	MATERIAL:	
REV	DESCRIPTION	DATE	INT	01/28/92	2 : 1		
				CAD #	TOOL #		
				28C0236-0JW-10-N	C0236		STEWARD 28