


HI1806T600R-10

UNCONTROLLED DOCUMENT

PHYSICAL DIMENSIONS:


A	4.50 [.177]	+ 0.25 [.010]
B	1.60 [.063]	+ 0.25 [.010]
C	1.60 [.063]	+ 0.25 [.010]
D	0.51 [.020]	+ 0.25 [.010]

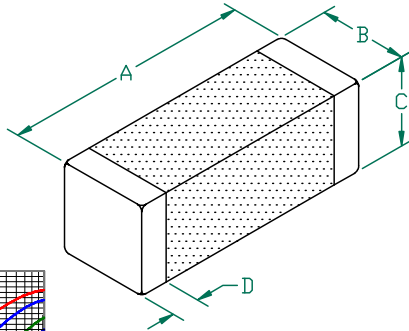




ELECTRICAL CHARACTERISTICS:			
Z @ 100MHz (Ω)	DCR (Ω)	Rated Current	
Nominal	60		
Minimum	45		
Maximum	75	0.010	6000 mA

NOTES: UNLESS OTHERWISE SPECIFIED

1. TERMINATION FINISH IS 100% TIN.
2. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 7" REELS, 2,000 PCS/REEL.
3. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.

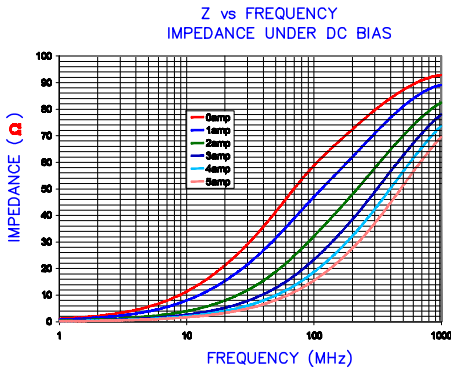

LAND PATTERNS FOR REFLOW SOLDERING

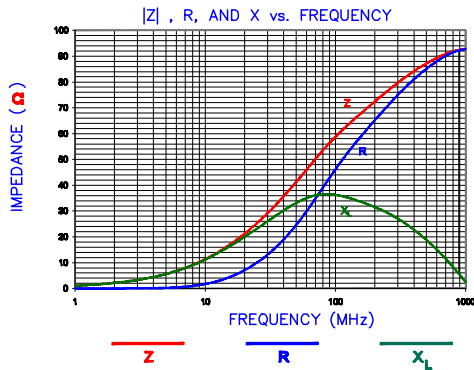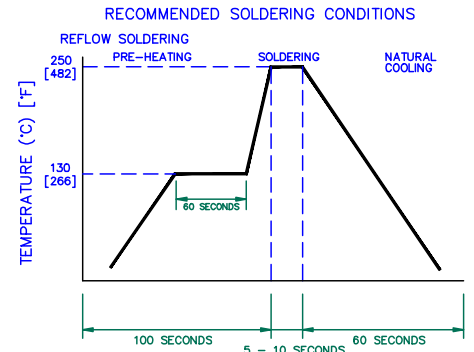

(For wave soldering, add 0.762 [.030] to this dimension.)



DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.	
F	CHANGE REEL QTY FROM 3K TO 2K	11/06/08	JRK	PROJECT/PART NUMBER:	HI1806T600R-10
E	UPDATE COMPANY LOGO	06/19/08	JRK	REV	F
D	UPDATE COMPANY LOGO ADD ROHS SYMBOL	01/18/08	JRK	PART TYPE:	CO-FIRE
C	ADD DC BIAS CURVE, CORRECT LANDPATTERN	03/07/03	JRK	DRAWN BY:	BAC
B	REMOVE NOTE 3	09/14/01	JRK	DATE:	01/12/01
A	ORIGINAL DRAFT	01/12/01	BAC	SCALE:	NTS
REV	DESCRIPTION	DATE	INT	CAD #	HI1806T600R-10-F



AGILENT E4991A RF Impedance/Material Analyzer
HP 16194A Test Fixture. TEST REF. 3124

SHEET: 2 of 2