


# Multilayer Chip Directional Couplers For DCS/Tx


Conformity to RoHS Directive

HHM Series HHM2204SA1


## SHAPES AND DIMENSIONS

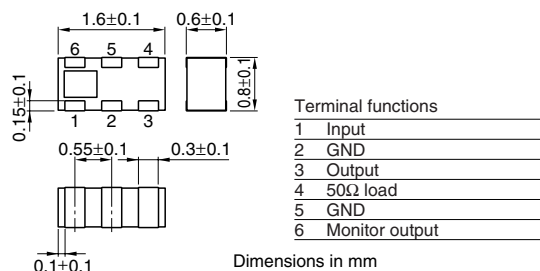

## CIRCUIT DIAGRAM



## RECOMMENDED PC BOARD PATTERNS

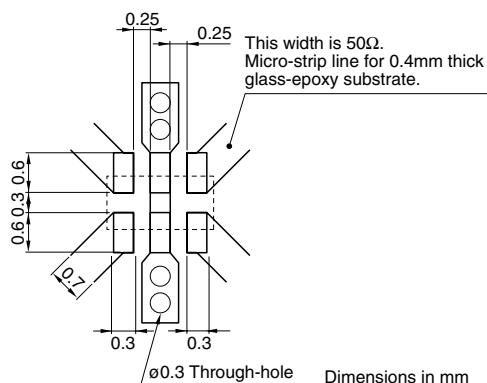

## ELECTRICAL CHARACTERISTICS

Frequency range	1710 to 1785MHz	
Coupling factor	15.0±1.0dB	
Insertion loss	0.30dB max.*1	
	0.35dB max.*2	
Isolation	25dB min.	
VSWR	1.3 max.	
Temperature range	Operating	-40 to +85°C
	Storage	-40 to +85°C

\*1 25°C


\*2 Operating temperature

- Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.


- All specifications are subject to change without notice.

### FREQUENCY CHARACTERISTICS


#### COUPLING

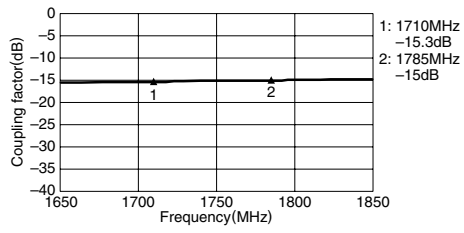


#### ISOLATION

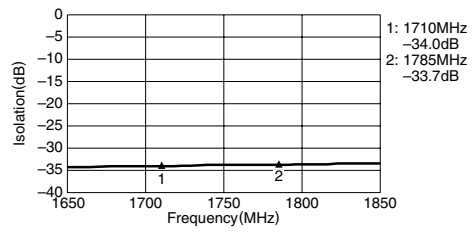

#### INSERTION LOSS

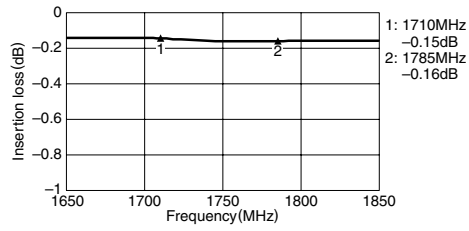

#### VSWR

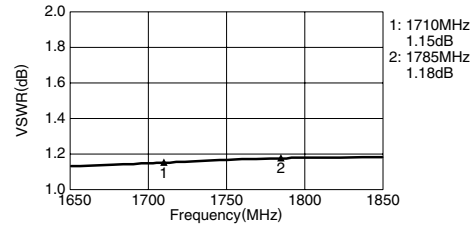

• All specifications are subject to change without notice.