





Potentiometers

315-2415F-Value



RoHS Compliant

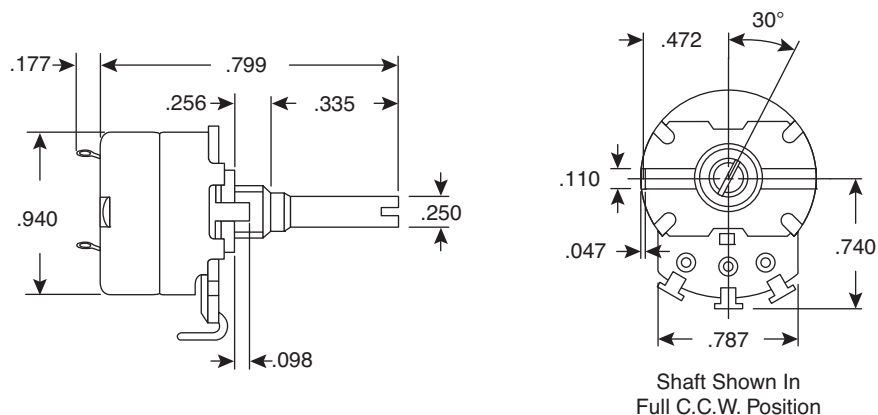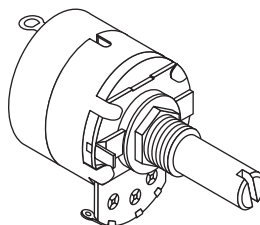

Dimensions (in.)

Specifications:

- Type: Linear Taper W/SPDT
- Breakdown Voltage: 500VAC for 1 minute
- Insulation Resistance: >100MΩ min. @ 500VDC
- Rated Wattage: 0.5W
- Rated Voltage: 500VDC
- Switch Rating: 125VAC 1 amp
- Rotation Angle: 300° ± 5°
- Rotation Torque: 20 ~ 200g.cm
- Rotational Life: 15,000 cycles
- Switch Working Angle: 50° ± 10°
- Switch Working Torque: 150 ~ 450g.
- Values(Ω) : 1K, 5K, 10K, 25K, 50K, 100K, 250K, 500K, & 1M
- RoHS Compliant