




Alpha 30mm Slide Potentiometer with LED

RA3045F Series



RoHS Compliant

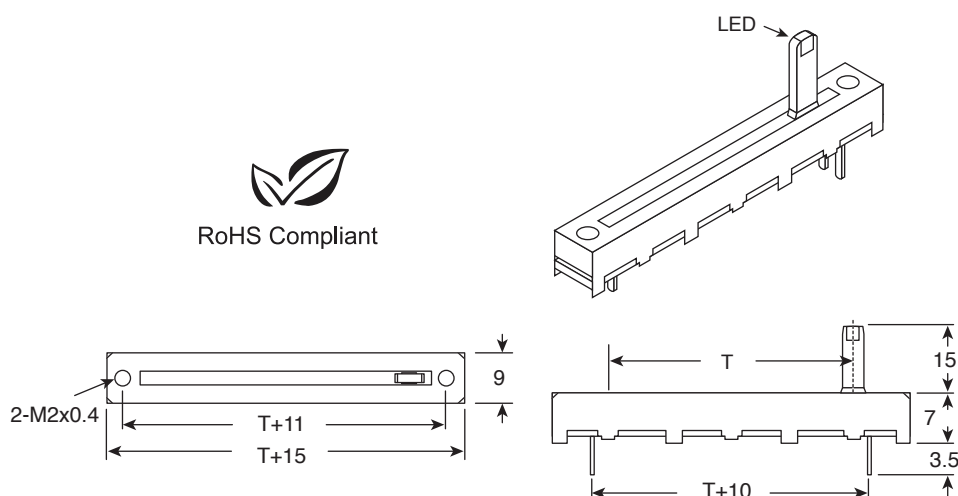

Dimensions mm (in.)

Specifications:

- Tolerance: $\pm 20\%$
- Slide Life: 15,000 Cycles
- Rated Voltage: 200V
- Rated Wattage: 20mm-0.1, 30mm, & 45mm-0.2
- Insulation resistance: 100m Ω @250V DC
- Breakdown voltage: 300 VAC for 1 minute
- Linear Taper
- Center Detent
- No Knob required
- Lever length: 15mm
- Slide Travel: 20mm, 30mm, & 45mm
- LED's available in Red, Green, and Amber

Alpha Part No.	Value (Ω)	Lever Travel (T)	LED Color
RA3045F-20R-15LC-B5K-C	5K	30mm	Red
RA3045F-20G-15LC-B5K-C	5K	30mm	Green
RA3045F-20A-15LC-B5K-C	5K	30mm	Amber
RA3045F-20R-15LC-B10K-C	10K	30mm	Red
RA3045F-20G-15LC-B10K-C	10K	30mm	Green
RA3045F-20A-15LC-B10K-C	10K	30mm	Amber
RA3045F-20R-15LC-B50K-C	50K	30mm	Red
RA3045F-20G-15LC-B50K-C	50K	30mm	Green
RA3045F-20A-15LC-B50K-C	50K	30mm	Amber
RA3045F-20R-15LC-B100K-C	100K	30mm	Red
RA3045F-20G-15LC-B100K-C	100K	30mm	Green
RA3045F-20A-15LC-B100K-C	100K	30mm	Amber

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.

Available from Mouser Electronics

www.mouser.com

(800) 346-6873