

Metal Film Resistors, Industrial, Flameproof



FEATURES

- Small physical size
- Low cost
- FP resistors have the ability to withstand overloads up to 100 times rated power without any trace of flame
- Exceptional frequency characteristics
- Especially suited for circuitry where functions, environments and duty cycles demand power resistors
- Electroplated tin-lead or lead (Pb)-free solder finish leads
- Tighter tolerances available on request
- Compliant to RoHS directive 2002/95/EC



RoHS*
COMPLIANT

STANDARD ELECTRICAL SPECIFICATIONS

GLOBAL MODEL	HISTORICAL MODEL	POWER RATING			MAXIMUM WORKING VOLTAGE (1) V	RESISTANCE RANGE Ω	TOLERANCE ± %	TEMPERATURE COEFFICIENT ± ppm/°C
		P _{25 °C} W	P _{40 °C} W	P _{70 °C} W				
FP01/2	FP1/2	-	-	0.5	350	10 to 1M	1, 2, 5, 10	150
FP0001	FP1	-	-	1	500	10 to 1M	1, 2, 5, 10	150
FP0032	FP32	-	-	1	500	10 to 1M	1, 2, 5, 10	150
FP0002	FP2	3.5	3	2	500	9 to 1.5M	1, 2, 5, 10	150
FP0042	FP42	-	-	2	500	10 to 1.5M	1, 2, 5, 10	150
FP0003	FP3	4	4	3	500	9 to 1M	1, 2, 5, 10	150
FP0004	FP4	5.5	5	4	500	6 to 1M	1, 2, 5, 10	150
FP0005	FP5	6.5	6	5	600	7 to 1M	1, 2, 5, 10	150
FP0007	FP7	7.5	-	7	700	8 to 1M	1, 2, 5, 10	150
FP0010	FP10	-	10	-	700	8 to 1M	1, 2, 5, 10	150
FP0067	FP67	5	-	-	500	5 to 19K	1, 2, 5, 10	150
FP0069	FP69	3	-	2	500	2.6 to 1.5M	1, 2, 5, 10	150


Note

(1) Continuous working voltage shall be $\sqrt{P \times R}$ or maximum working voltage, whichever is less.


GLOBAL PART NUMBER INFORMATION

New Global Part Numbering: FP000251K1F9251B8 (preferred part numbering format)

F P 0 0 0 2 5 1 K 1 F 9 2 5 1 B 8

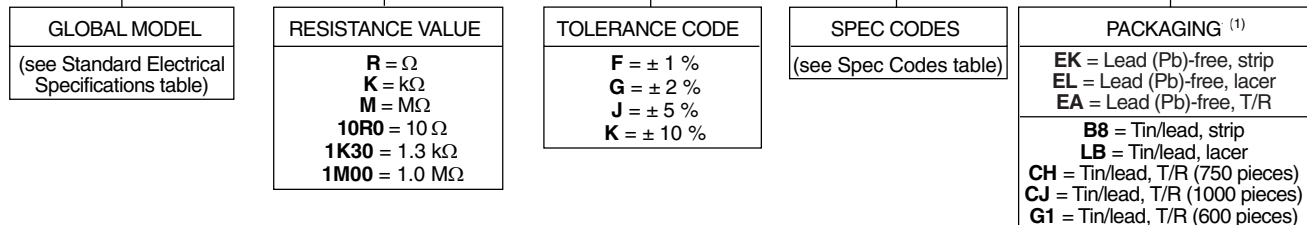

Historical Part Number: FP25112F B8 (will continue to be accepted)




Note

(1) Some packaging codes are model specific

* Pb containing terminations are not RoHS compliant, exemptions may apply

DIMENSIONS in inches (millimeters)




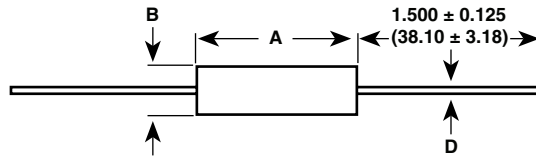


GLOBAL MODEL	A	B	D
FP01/2	0.360 ± 0.020 (9.14 ± 0.51) ⁽¹⁾	0.138 + 0.012 - 0.023 (3.51 + 0.31 - 0.58)	0.032 ± 0.002 (0.81 ± 0.05)
FP0001	0.560 ± 0.031 (14.22 ± 0.79)	0.190 + 0.007 - 0.015 (4.83 + 0.18 - 0.38)	0.032 ± 0.002 (0.81 ± 0.05)
FP0032	0.560 ± 0.031 (14.22 ± 0.79)	0.190 + 0.007 - 0.015 (4.83 + 0.18 - 0.38)	0.040 ± 0.002 (1.02 ± 0.05)
FP0002	0.687 ± 0.031 (17.45 ± 0.79)	0.300 ± 0.020 (7.62 ± 0.51)	0.032 ± 0.002 (0.81 ± 0.05)
FP0042	0.687 ± 0.031 (17.45 ± 0.79)	0.300 ± 0.020 (7.62 ± 0.51)	0.045 ± 0.002 (1.14 ± 0.05)
FP0003	0.900 ± 0.031 (22.86 ± 0.79)	0.300 ± 0.020 (7.62 ± 0.51)	0.032 ± 0.002 (0.81 ± 0.05)
FP0004	1.530 ± 0.035 (38.86 ± 0.89)	0.300 ± 0.020 (7.62 ± 0.51)	0.032 ± 0.002 (0.81 ± 0.05)
FP0005	1.710 ± 0.035 (43.43 ± 0.89)	0.300 ± 0.020 (7.62 ± 0.51)	0.032 ± 0.002 (0.81 ± 0.05)
FP0007	2.040 ± 0.035 (51.82 ± 0.89)	0.300 ± 0.020 (7.62 ± 0.51)	0.032 ± 0.002 (0.81 ± 0.05)
FP0010	2.040 ± 0.035 (51.82 ± 0.89)	0.300 ± 0.020 (7.62 ± 0.51)	0.032 ± 0.002 (0.81 ± 0.05)
FP0067	0.900 ± 0.031 (22.86 ± 0.79)	0.300 ± 0.020 (7.62 ± 0.51)	0.032 ± 0.002 (0.81 ± 0.05)
FP0069	0.516 ± 0.021 (13.11 ± 0.53)	0.225 ± 0.012 (5.72 ± 0.31)	0.032 ± 0.002 (0.81 ± 0.05)



Note

⁽¹⁾ Clean lead to clean lead dimensions on FP1/2 are 0.347" (11.10 mm) maximum

DERATING

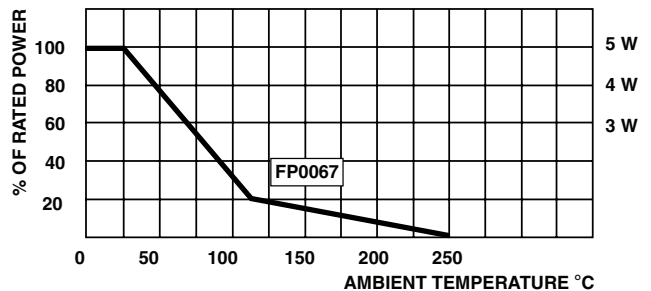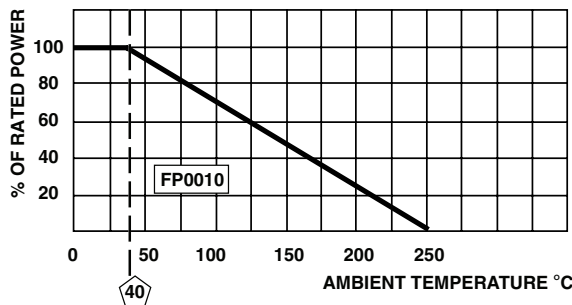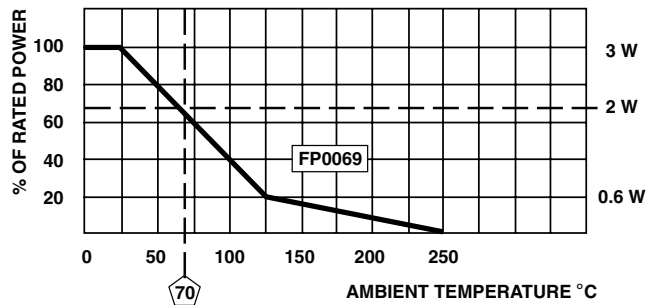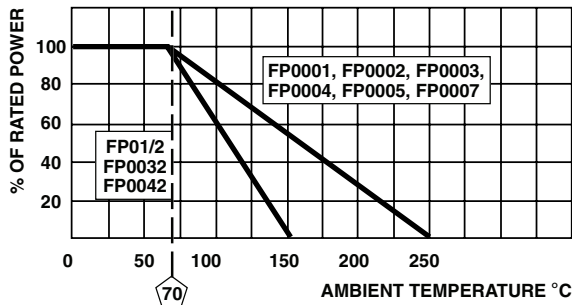

SPEC CODES			
GLOBAL MODEL	SPEC	RESISTOR TOLERANCE	DESCRIPTION
FP01/2	5605	1, 2, 5, 10	Color banded, 4 or 5 bands depending on tolerance
	5610	1, 2, 5, 10	Alphanumeric marking
FP0001	6200	2, 5, 10	Color banded, 4 bands
	6201	1	Color banded, 5 bands
FP0032	6601	1	Color banded, 5 bands
	6602	2, 5, 10	Color banded, 4 bands
FP0002	9251	1, 2, 5, 10	Alphanumeric marking
FP0042	9201	1	Color banded, 5 bands
	9202	2, 5, 10	Color banded, 4 bands
FP0003	9300	1, 2, 5, 10	Alphanumeric marking
	9320	2, 5, 10	Color banded, 4 bands
	9330	1	Color banded, 5 bands
FP0004	9400	1, 2, 5, 10	Alphanumeric marking
FP0005	9500	1, 2, 5, 10	Alphanumeric marking
FP0007	9700	1, 2, 5, 10	Alphanumeric marking
FP0010	9800	1, 2, 5, 10	Alphanumeric marking
FP0067	9550	1, 2, 5, 10	Alphanumeric marking
FP0069	7500	1, 2, 5, 10	Alphanumeric marking
	7536	2, 5, 10	Color banded, 4 bands
	7538	1	Color banded, 5 bands

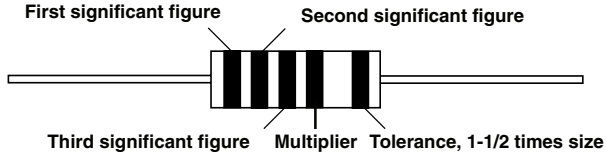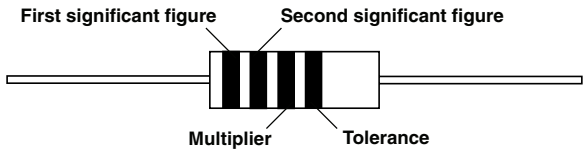MARKING			
- DALE	- Value	- Tolerance	- Model and case size (Date and source code included on some styles)
<p>± 1 % tolerance parts are marked with 5 color bands. 5 bands, EIA Standard RS196.</p>		<p>± 2 %, ± 5 % and ± 10 % tolerance parts are marked with 4 color bands. 4 band commercial, EIA Standard.</p>	
<p>First significant figure</p>  <p>Third significant figure Multiplier Tolerance, 1-1/2 times size</p>	<p>First significant figure</p>  <p>Multiplier Tolerance</p>		



PERFORMANCE												
TEST	MAXIMUM ΔR (TYPICAL TEST LOTS) \pm %											
	FP01/2	FP0001	FP0032	FP0002	FP0042	FP0003	FP0004	FP0005	FP0007	FP0010	FP0067	FP0069
Short Time Overload	0.5	1.0	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
Low Temperature Operation	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.25	0.25
Moisture Resistance	1.0	1.5	1.5	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
Shock	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
Vibration	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
Temperature Cycle	1.0	1.0	1.0	0.5	1.0	1.0	1.0	1.0	1.0	1.0	1.0	0.5
Load Life (1000 h Rated Conditions)	1.0	2.0	2.0	5.0	2.0	5.0	5.0	5.0	5.0	5.0	5.0	3.0
Terminal Strength	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
Dielectric Withstanding Voltage	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.25	0.25
Effect Solder Heat	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.25	0.25

PACKAGING			
GLOBAL MODEL	PACKAGING TYPE	PACKAGING CODE	
		LEAD (Pb)-BEARING	LEAD (Pb)-FREE
FP01/2, FP0001, FP0032, FP0069	Strip	B8	EK
	Tape/reel	CJ	EA
FP0002, FP0003, FP0042, FP0067	Strip	B8	EK
	Tape/reel	CH	EA
FP0004	Lacer	LB	EL
	Tape/reel	G1	EA
FP0005, FP0007, FP0010	Lacer	LB	EL



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.