

RoHS


COMPLIANT

3 mm Square Surface Mount Miniature Trimmer Single-Turn Cermet Sealed



FEATURES

- 0.125 W at 70 °C
- Small size for optimum packaging density
- Suitable for both manual and automatic operations
- Compliant to RoHS Directive 2002/95/EC

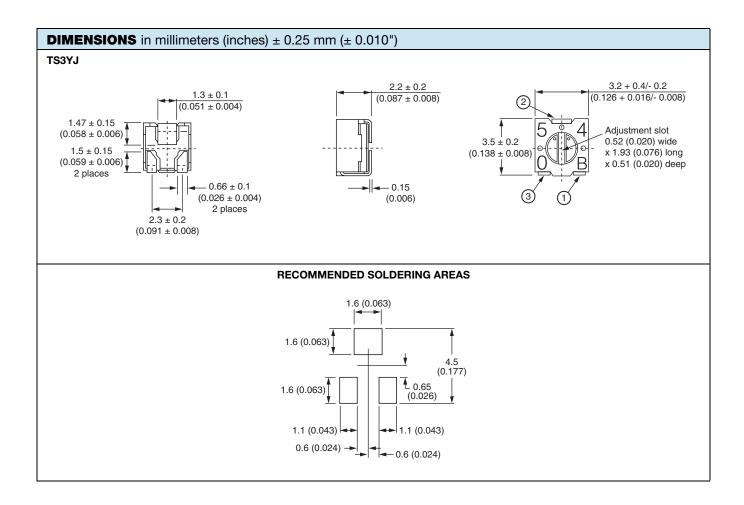

Vishay Sfernice

3 mm Square Surface Mount Miniature Trimmer Single-Turn Cermet Sealed



ELECTRICAL SPECIFICATIONS					
Resistive element	Cermet				
Electrical travel	220°				
Resistance range	10 Ω to 2 M Ω				
Stocked range	1 kΩ to 100 kΩ				
Standard series	1 - 2 - 5				
Tolerance standard	± 20 %				
Circuit diagram	$ \begin{array}{c} \begin{array}{c} \begin{array}{c} \begin{array}{c} \begin{array}{c} \begin{array}{c} \end{array}\\ \end{array}\\ \end{array}\\ \begin{array}{c} \end{array}\\ \begin{array}{c} \end{array}\\ \end{array}$				
Power rating	0.125 W at 70 °C				
Temperature coefficient (max.)	\geq 100 Ω ± 150 ppm/°C/> 100 Ω ± 100 ppm/°C				
Limiting element voltage (max.)	200 V				
Contact resistance variation	3 % or 3 Ω				
End resistance	1 % or 3 Ω				
Dielectric strength (RMS)	500 V (sea level)				
Insulation resistance (500 V _{DC})	100 ΜΩ				

MECHANICAL SPECIFICATIONS				
Mechanical travel	250°			
Operating torque (max. Ncm)	0.5			
End stop torque (min. Ncm)	2			
Unit weight (max. g)	0.1			
Mechanical life (cycles)	50			

ENVIRONMENTAL SPECIFICATIONS				
Temperature range	- 55 °C to + 125 °C			
Sealing	Sealed container IP67			
MSL level	1			

SOLDERING RECOMMENDATIONS

Recommended reflow profile 2, see Application Note <u>www.vishay.com/doc?52029</u>

RESISTANCE	PART MARKING CODE	RESISTANCE CODE	
10	A1	100	
20	21	200	
50	51	500	
100	A2	A2 101	
200	22	201	
500	52	501	
1K	A3	102	
2K	23	202	
5K	53	502	
10K	A4 103		
20K	24	24 203	
50K	54 503		
100K	A5	104	
200K	25	204	
500K	55	504	
1M	A6	105	
2M	26	205	


www.vishay.com 12 For technical questions, contact: <u>sfer@vishay.com</u> See also Application Note: <u>www.vishay.com/doc?51001</u> and <u>www.vishay.com/doc?52029</u>




3 mm Square Surface Mount Miniature Trimmer Single-Turn Cermet Sealed

Vishay Sfernice

TS3

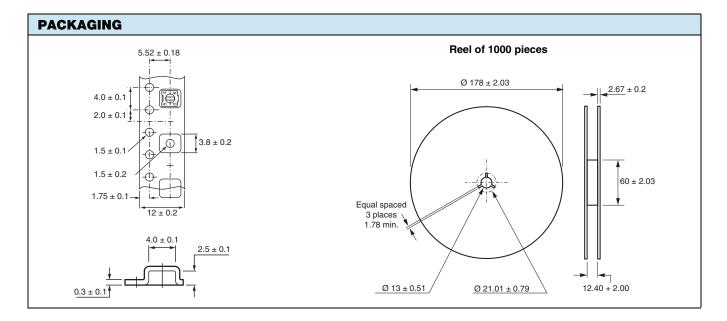

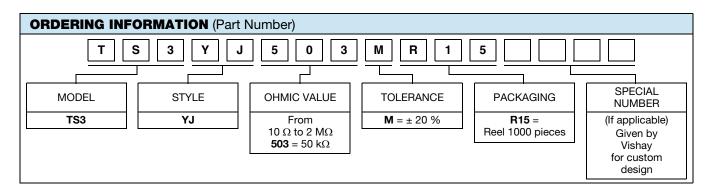

DESCRIPTION (for information only)							
TS3	YJ	50K	20 %		TR	e3	
MODEL	STYLE	VALUE	TOLERANCE	SPECIAL	PACKAGING	LEAD FINISH	



Vishay

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.