


Banana Jacks

164-R124R-EX, 164-R124B-EX



Banana Jacks

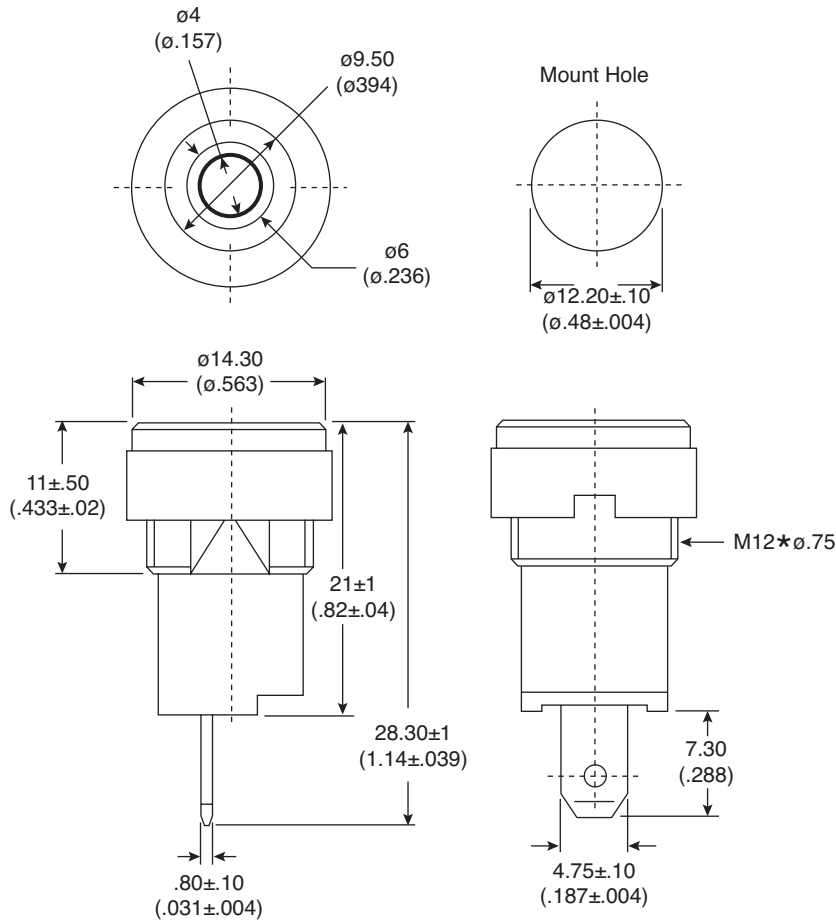

Dimensions: mm (in.)

SPECIFICATIONS	
Rating:	10A/125V AC
Contact Resistance:	50m Ω Max.
Insulation Resistance:	500VDC 100M Ω Min.
Dielectric Strength:	1000VAC 1 min.
Temperature Range:	-10°C to +80°C
RoHS Compliant by Exemption	

MATERIALS	
Nut:	Copper alloy, Ni-plating
Terminal:	Copper alloy, Ni-plating
Housing:	ABS

Date Last Revised: 3-6-07

Available from Mouser Electronics
1-800-346-6873 / www.mouser.com

KC-301105

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.

164-R124R-EX, 164-R124B-EX