HDMI Receptacle, Type C Right Angle SMT

154-10405-E

KOBICONN

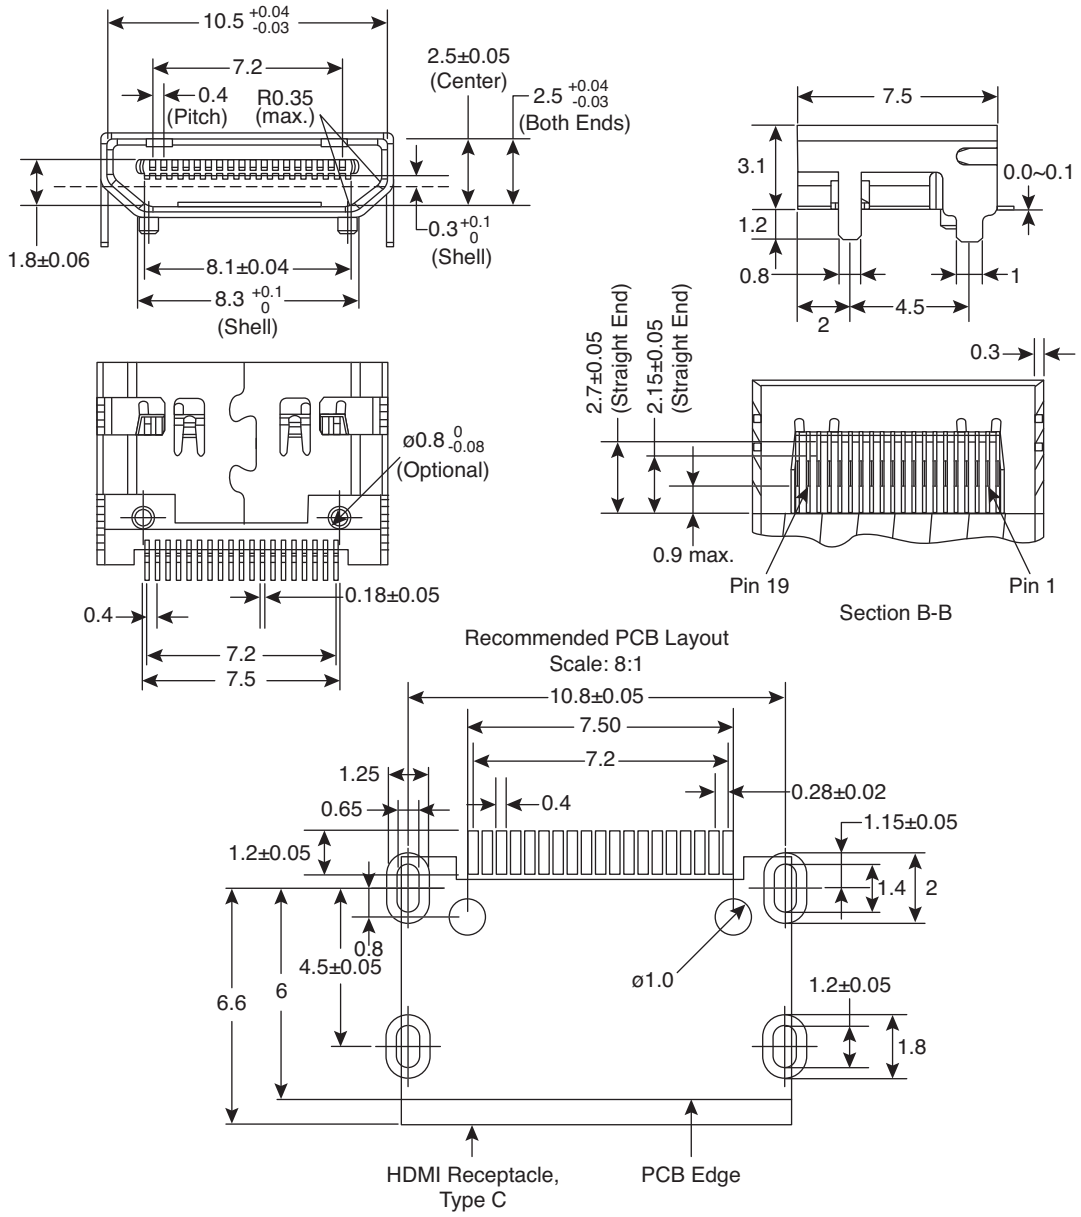

Dimensions: mm

SPECIFICATIONS	MATERIALS
Curren Rating: 0.5A Voltage Rating: 40V DC Contact Resistance: 30m Ω MAX. Insulation Resistance: 100m Ω MIN. Operating Temperature: 0°C ~ +50°C	Housing: High temp. plastic UL94V-0, Black Shell: Copper Alloy Shell Plating: Nickel underplating Tin 100 plating Terminal: Copper Alloy Terminal Plating: Tin selective gold
RoHS Compliant	

Date Last Revised: 01/9/09

Available from Mouser Electronics
1-800-346-6873 / www.mouser.com

KC-301235

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.

Downloaded from Elcodis.com electronic components distributor