

RoHS



STX-35332 Series Surface Mount 3.5mm Audio Jack

Features

- Offered in a 2-Pole or 3-Pole Version
- Used in devices such as audio equipment, cell phones, or digital still camera
- Complies with EIA Standards
- CSA/NRTL Certified File No. LR78160



Performance Specifications

Materials and Finish

Housing

High Temperature Thermoplastic, UL 94V-0 Rated

Terminals

Copper Alloy, Gold Plated



Electrical Characteristics

Contact Resistance

Before Durability Test

50 milliohms Max.

After Durability Test

100 milliohms Max.

Rated Voltage

16V DC

Rated Current

0.3 A

Insulation Resistance

100 Megohms Min. at 500V DC

Dielectric Strength

500V AC RMS for 1 Minute

Operating Temperature

-25°C to +70°C

AUDIO JACKS

STX-35332 Series


Documentation & Ordering Information

| | | |
|--|--|--|
| | | |
| | | |

Kycon Part

| |
|--|
| |
|--|

Part Number Builder

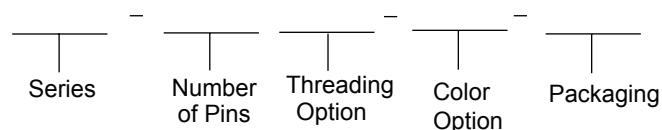

Series

STX-35332 - Surface Mount 3.5mm Audio Jack

Number of Pins

3 Pin

4 Pin

5 Pin

Threading Option

N - Non-Threaded

Color option

Black - Standard

Packaging

TR - Tape and Reel

Contact Kycon for PC99 color option minimum order may apply

STX-35332 Dimensions

Dimensions in mm

STX-35332-3N-TR

