



Plug

171-3500-E

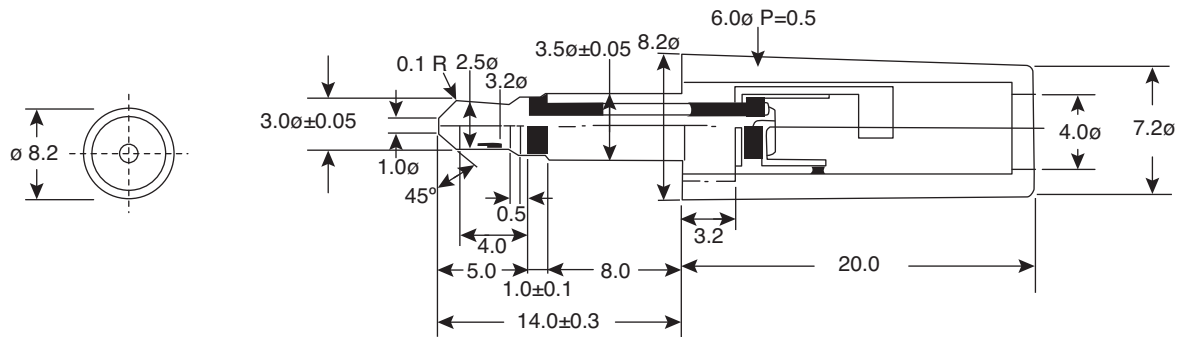

Plug

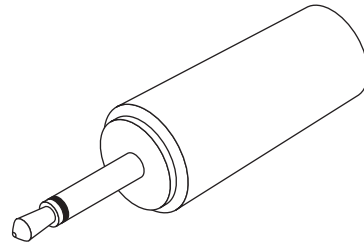

Dimensions: mm

SPECIFICATIONS	
Type:	unshielded mono phone w/metal thread
Dielectric Strength:	500VAC for 1 minute
Insulation resistance:	100MΩ @ 500VDC
Contact resistance:	50mΩ max.
Body & cap:	ABS resin
Terminal & contact:	nickel plated brass
Pin:	Nickel plated steel
RoHS Compliant	

Date Last Revised: 11-24-10

Available from Mouser Electronics
1-800-346-6873
www.mouser.com

KC-300887

171-3500-E

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.