
2.5mm Mono Phone Plug

171-3304-EX



Access of the second

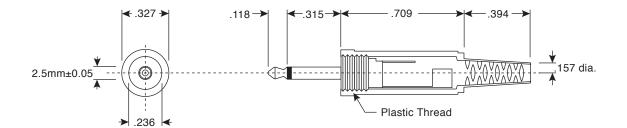

Dimensions: In. (except where noted)

SPECIFICATIONS	
Туре:	2.5mm Mono Phone
Temperature Rating:	70°C
Breakdown Voltage:	500VAC for 1 Minute
Insulation Resistance:	100MΩ @ 500VDC
Contact Resistance:	$50m\Omega$ max.
Life Time:	10,000 Cycles min.
Contacts, Terminal:	Nickel Plated Brass
Pin:	Nickel Plated Steel
Insulator:	Acrylonitrile Butadiene Styrene (ABS)
Сар:	Polypropylene
RoHS Compliant by Exemption	

Date Last Revised: 12-21-05

Available from Mouser Electronics 1-800-346-6873 www.mouser.com

KC-300885

171-3304-EX

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.

Downloaded from Elcodis.com electronic components distributor