

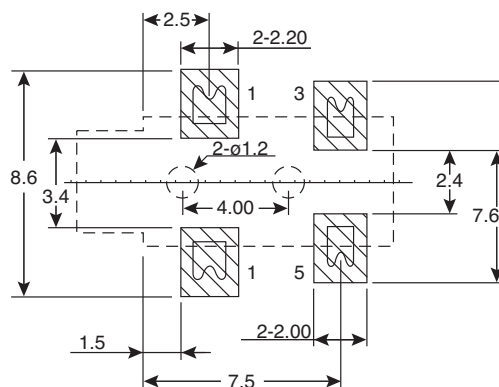
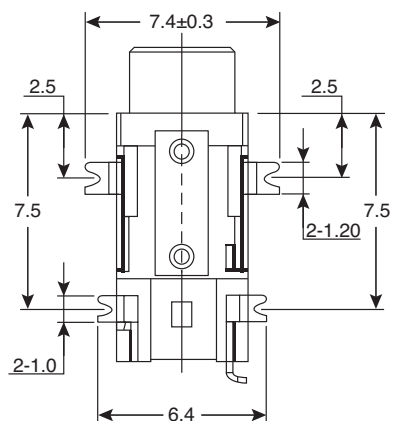


# SMD Phone Jack



161-2625-E

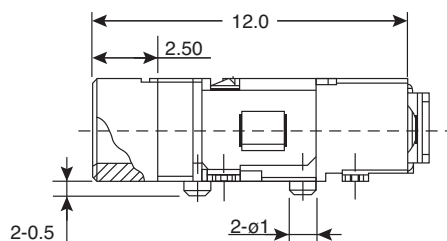

SMD Phone Jack

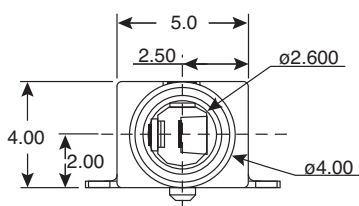

SOLDERING PADS  
(BOTTOM VIEW)

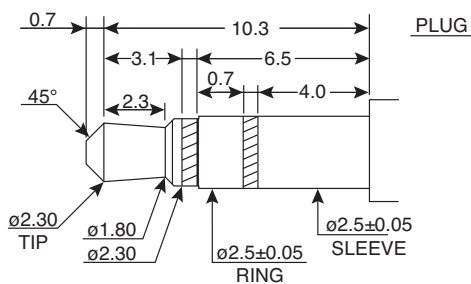

Dimensions: mm

ELECTRICAL SPECIFICATIONS	
<b>Voltage rating:</b>	16 VDC
<b>Current Rating:</b>	0.3A
<b>Contact resistance:</b>	30mΩ
<b>Insulation resistance:</b>	100MΩ, 500VDC
<b>Voltage rating:</b>	500VAC for 1 min.
RoHS Compliant	

Tolerance	
X.	±0.5
X.X	±0.3
X.XX	±0.15

MECHANICAL SPECIFICATIONS	
<b>Durability:</b>	5000 cycles
<b>Insertion force:</b>	3Kg to 2.0Kg
<b>Extraction force:</b>	2Kg to 2.0Kg
<b>Soldering temperature:</b>	260°C for 5 seconds
<b>Operating temperature:</b>	-25°C to +85°C

PLATING	
<b>Contacts:</b>	silver

Date Last Revised: 10-2-08

Available from Mouser Electronics  
1-800-346-6873 / www.mouser.com

KC- 300968

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.

161-2625-E