


## 2.5mm Phone Plug

17PP053-EX





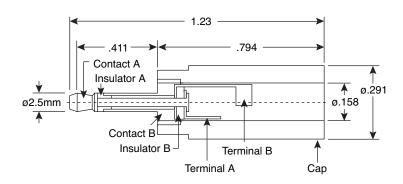



**Dimensions: In.** (except where noted)

SPECIFICATIONS	
Contact Resistance:	50mΩ max.
Insulation Resistance:	100MΩ min. @ 500VDc
Dielectric Strength:	500VAC for 1 Minute
Cap:	ABS Resin
Contact A:	Nickel Plated Brass
Contact B:	Nickel Plated Brass
Terminal A:	Nickel Plated Brass
Terminal B:	Nickel Plated Steel
Insulator A:	Ebonite
Insulator B:	Phenolic Resin
RoHS Compliant by Exemption	

Date Last Revised: 12-22-05

Available from Mouser Electronics 1-800-346-6873 www.mouser.com

KC-300886