


SMD Phone Jack

161-2623-E



SMD Phone Jack

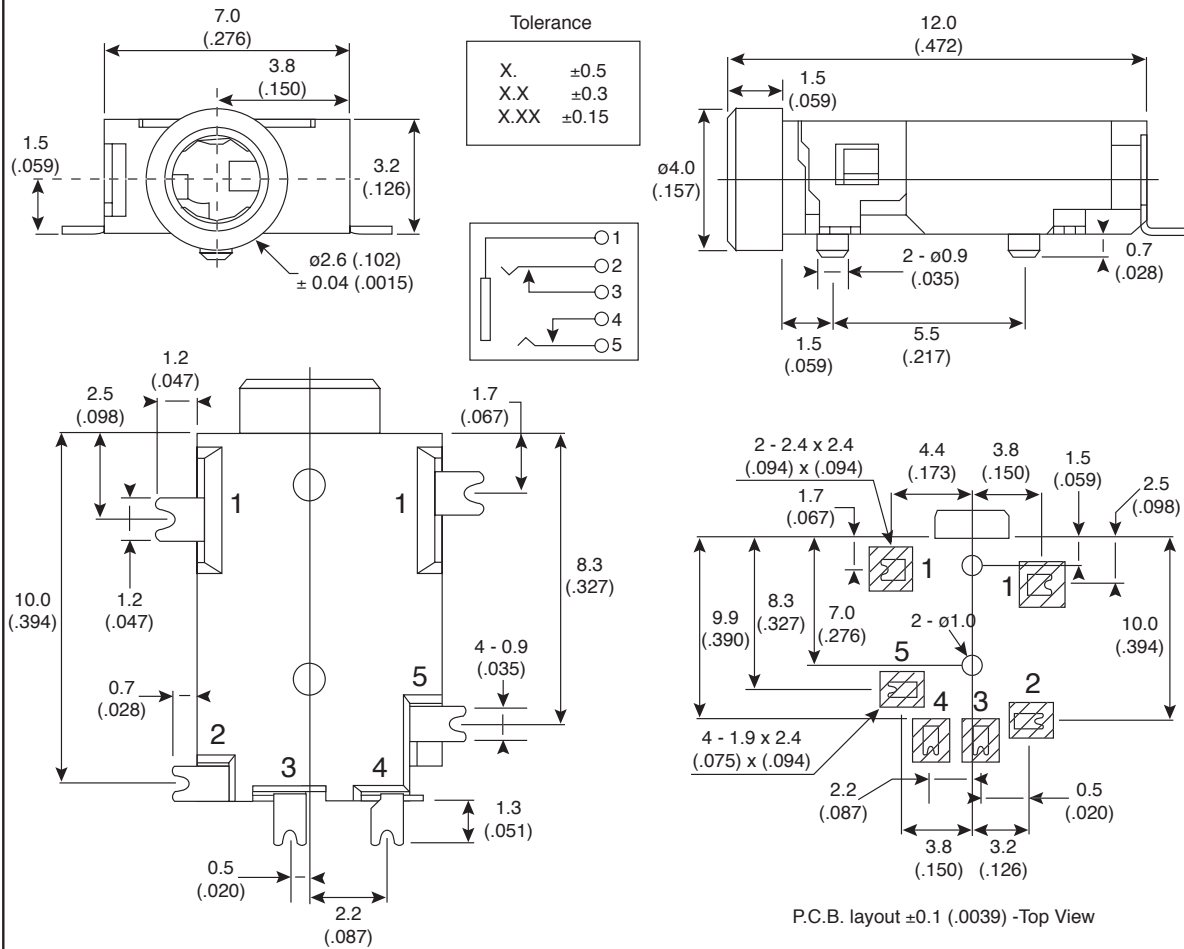

Dimensions: mm

SPECIFICATIONS	
Rating:	.3A 16VDC
Contact Resistance:	30 mΩ
Insulation Resistance	100 MΩ 500VDC
Dielectric Strength:	500VAC 1 min.

Material	
Contacts:	Phosphor bronze
Housing	Nylon-46 G30% UL94V0 black
RoHS Compliant	

MECHANICAL	
Durability:	5000 cycles
Insertion Force:	.3 Kg to 2.0 Kg
Extraction Force:	.2 Kg to 2.0 Kg
Soldering Temperature:	260°C for 5 seconds
Operating Temperature:	-25 to 80°C

Plating	
Contacts:	Gold flash

Date Last Revised: 6-23-06

Available from Mouser Electronics
1-800-346-6873
www.mouser.com

KC- 300977

161-2623-E