


# 3.5mm Shielded Mono Plug

171-3200-EX



3.5mm Shielded Mono Plug

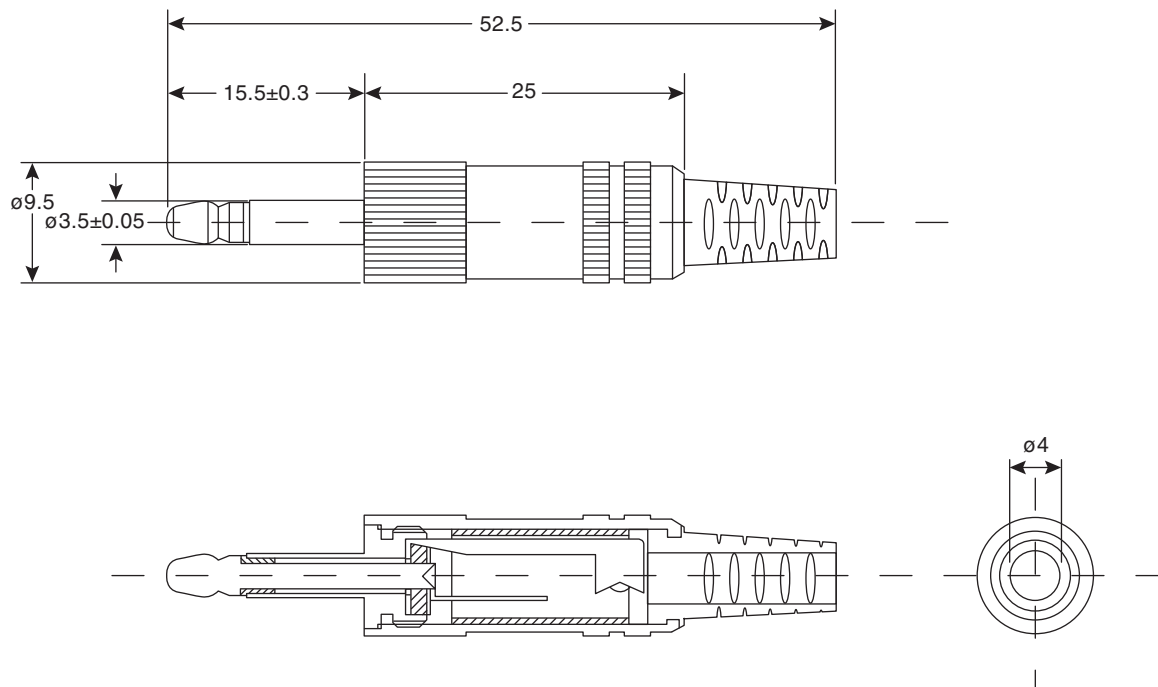

Dimensions: mm

## SPECIFICATIONS

<b>Type:</b>	3.5mm High Reliability Shielded Mono Plug with Strain Relief, Insulated Sleeve and U.S. Tip
<b>Temperature:</b>	70°C
<b>Withstand Voltage:</b>	500VAC for 1 Minute
<b>Insulation Resistance:</b>	100M $\Omega$
<b>Contact Resistance:</b>	50M $\Omega$ max.
<b>Cap &amp; Plug:</b>	Nickel Plated Brass
<b>Plug Terminal:</b>	Nickel Plated Brass
<b>Plug Insulator:</b>	Ebonite
<b>Threaded Sleeve:</b>	Nickel Plated Brass
<b>Strain Relief:</b>	PVC
RoHS Compliant by Exemption	

Date Last Revised: 6/3/10

Available from Mouser Electronics  
1-800-346-6873 / [www.mouser.com](http://www.mouser.com)

KC-300891

171-3200-EX

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.