




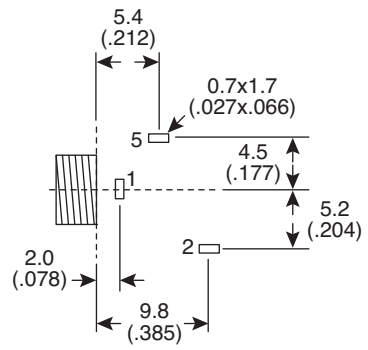


PCB Phone Jack

161-3507

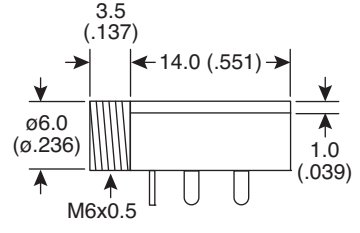

PCB Phone Jack

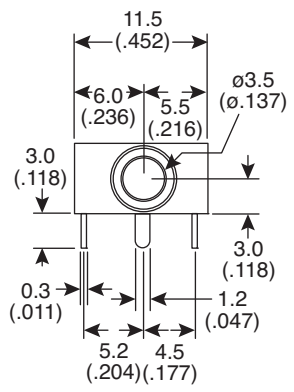

Dimensions: mm (in.)
Tolerance +/- 0.3mm(0.01)

| SPECIFICATIONS | |
|------------------------|-------------------------------|
| Type: | Stereo, PCB mount |
| Insulation Resistance: | >100MΩ |
| Contact Resistance: | <10mΩ |
| Withstand Voltage: | 250VAC for 1 minute |
| Soldering Temperature: | 230±5°C for 5±.5 seconds |
| Bushing: | Nickel plated brass |
| Body: | Black plastic |
| Contact: | Silver plated phosphor bronze |
| Hardware Included: | Knurled nut |
| Mounting Holes: | .25" |
| | Can be water washed |
| | Wave solderable |

Date Last Revised: 10-14-09

Available from Mouser Electronics
1-800-346-6873
www.mouser.com

KC-300039

161-3507

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.