



Recommended PCB Layout (Bottom View)

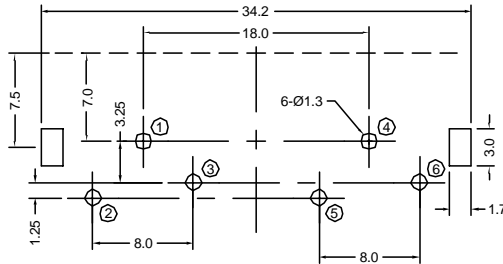

**Materials and Finish**

Base: ABS Plastic\*  
 Cover: ABS Plastic  
 \*not recommended for wave soldering process

Barrel: Brass  
 Plating: Nickel Plated  
 Terminals: Brass  
 Plating: Tin Plated  
 ground pin: Nickel Plated  
 Operating Temp:  
 -25°C to +70°C



**RoHS COMPLIANT**  
 EU Directive 2002/95/EC

Tolerances  
 X.X ± 0.25  
 X.XX ± 0.15  
 Unless Stated  
 Otherwise

REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE
A1	6/27/05	New Drawing	N.Chang	C. Furumasa	N.Chang	6/27/05
A2	3/24/06	Release Drawing	H.MA	N/A		

**KLP42X-61-RW/RW**

Stacked RCA Jack, RoHS Compliant  
 Right Angle PCB Mount, Red-White over Red-White

