



Surface Mount Glass Passivated Ultrafast Rectifier

SUPERRECTIFIER®



DO-213AB (GL41)

Patented*

*Glass-plastic encapsulation is covered by Patent No. 3,996,602, brazed-lead assembly to Patent No. 3,930,306

FEATURES

- Cavity-free glass-passivated junction
- Ideal for automated placement
- Ultrafast reverse recovery time
- Low switching losses, high efficiency
- High forward surge capability
- Meets environmental standard MIL-S-19500
- Meets MSL level 1, per J-STD-020C, LF max peak of 250 °C
- Solder Dip 260 °C, 40 seconds
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC



TYPICAL APPLICATIONS

For use in high frequency rectification and free-wheeling application in switching mode converters and inverters for consumer, computer, automotive and telecommunication.

MECHANICAL DATA

Case: DO-213AB, molded epoxy over glass body

Epoxy meets UL 94V-0 flammability rating

Terminals: Matte tin plated leads, solderable per J-STD-002B and JESD22-B102D

E3 suffix for commercial grade, HE3 suffix for high reliability grade (AEC Q101 qualified)

Polarity: Two bands indicate cathode end - 1st band denotes device type and 2nd band denotes repetitive peak reverse voltage rating

MAJOR RATINGS AND CHARACTERISTICS	
$I_{F(AV)}$	1.0 A
V_{RRM}	50 V to 400 V
I_{FSM}	30 A
t_{rr}	50 ns
V_F	1.0 V, 1.25 V
$T_j \text{ max.}$	175 °C

MAXIMUM RATINGS ($T_A = 25 \text{ °C}$ unless otherwise noted)								
PARAMETER	SYMBOL	BYM12-50	BYM12-100	BYM12-150	BYM12-200	BYM12-300	BYM12-400	UNIT
Fast efficient device: 1st band is Green		EGL41A	EGL41B	EGL41C	EGL41D	EGL41F	EGL41G	
Polarity color bands (2nd Band)		Gray	Red	Pink	Orange	Brown	Yellow	
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	150	200	300	400	V
Maximum RMS voltage	V_{RMS}	35	70	105	140	210	280	V
Maximum DC blocking voltage	V_{DC}	50	100	150	200	300	400	V
Maximum average forward rectified current at $T_T = 75 \text{ °C}$	$I_{F(AV)}$	1.0						A
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load	I_{FSM}	30						A
Operating junction and storage temperature range	T_J, T_{STG}	- 65 to + 175						°C

ELECTRICAL CHARACTERISTICS ($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)									
PARAMETER	TEST CONDITIONS	SYMBOL	BYM12-50	BYM12-100	BYM12-150	BYM12-200	BYM12-300	BYM12-400	UNIT
			EGL41A	EGL41B	EGL41C	EGL41D	EGL41F	EGL41G	
Maximum instantaneous forward voltage ⁽¹⁾	at 1.0 A	V_F	1.0				1.25		V
Maximum DC reverse current at rated DC blocking voltage ⁽¹⁾	$T_A = 25\text{ }^\circ\text{C}$ $T_A = 125\text{ }^\circ\text{C}$	I_R	5.0 50						μA
Max. reverse recovery time	at $I_F = 0.5\text{ A}$, $I_R = 1.0\text{ A}$, $I_{rr} = 0.25\text{ A}$	t_{rr}	50						ns
Typical junction capacitance	at 4.0 V, 1 MHz	C_J	20				14		pF

Note:

(1) Pulse test: 300 μs pulse width, 1 % duty cycle

THERMAL CHARACTERISTICS ($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)									
PARAMETER	SYMBOL	BYM12-50	BYM12-100	BYM12-150	BYM12-200	BYM12-300	BYM12-400	UNIT	
		EGL41A	EGL41B	EGL41C	EGL41D	EGL41F	EGL41G		
Maximum thermal resistance ^(1,2)	$R_{\theta JA}$ $R_{\theta JT}$	60 30						$^\circ\text{C/W}$	

Note:

(1) Thermal resistance from junction to ambient, 0.24 x 0.24" (6.0 x 6.0 mm) copper pads to each terminal

(2) Thermal resistance from junction to terminal, 0.24 x 0.24" (6.0 x 6.0 mm) copper pads to each terminal

ORDERING INFORMATION (Example)				
PREFERRED P/N	UNIT WEIGHT (g)	PREFERRED PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
EGL41D-E3/96	0.114	96	1500	7" Diameter Plastic Tape & Reel
EGL41D-E3/97	0.114	97	5000	13" Diameter Plastic Tape & Reel
EGL41DHE3/96 ⁽¹⁾	0.114	96	1500	7" Diameter Plastic Tape & Reel
EGL41DHE3/97 ⁽¹⁾	0.114	97	5000	13" Diameter Plastic Tape & Reel

Note:

(1) Automotive grade AEC Q101 qualified



RATINGS AND CHARACTERISTICS CURVES

($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)

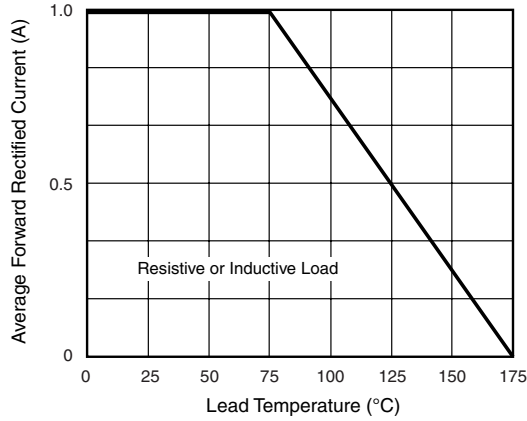


Figure 1. Maximum Forward Current Derating Curve

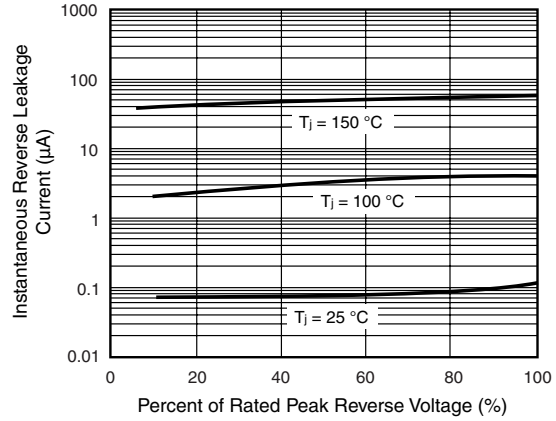


Figure 4. Typical Reverse Leakage Characteristics

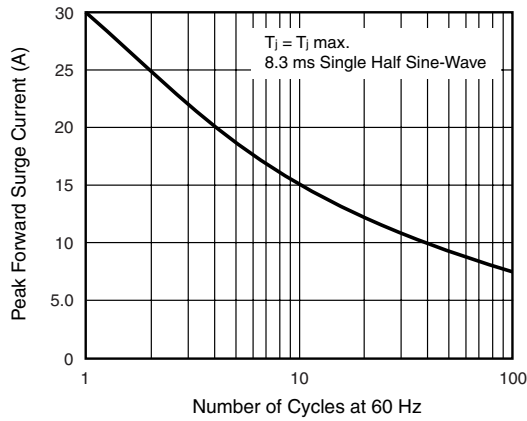


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current

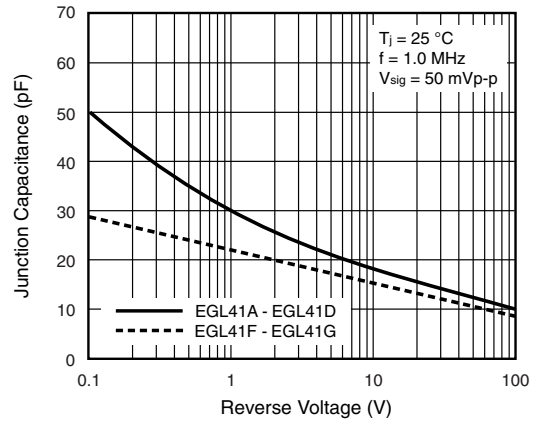


Figure 5. Typical Junction Capacitance

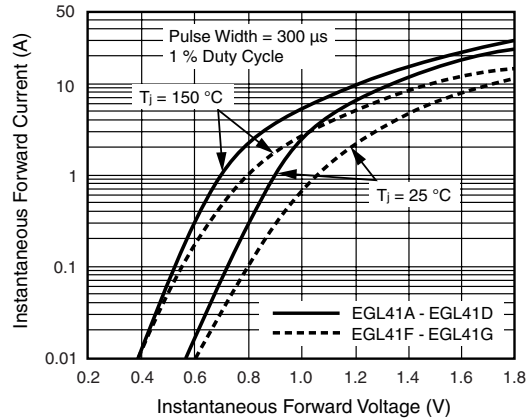


Figure 3. Typical Instantaneous Forward Characteristics


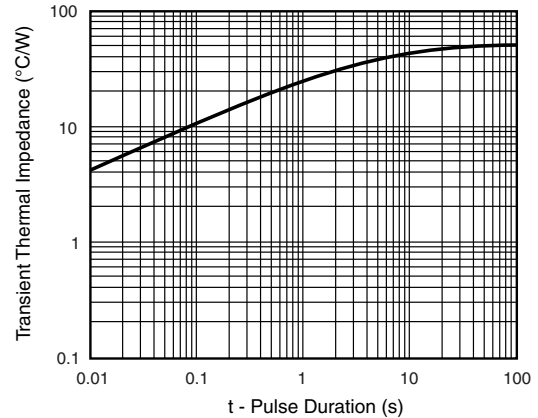


Figure 6. Typical Transient Thermal Impedance


PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

DO-213AB (GL41)

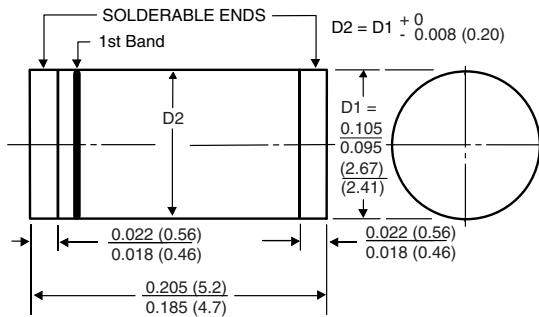

1st band denotes type and positive end (cathode)

Mounting Pad Layout

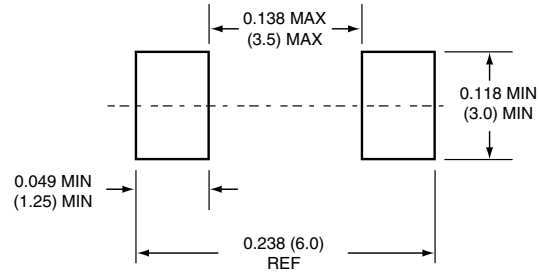



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.