Alle Rechte vorbehalten/ *All rights reserved*

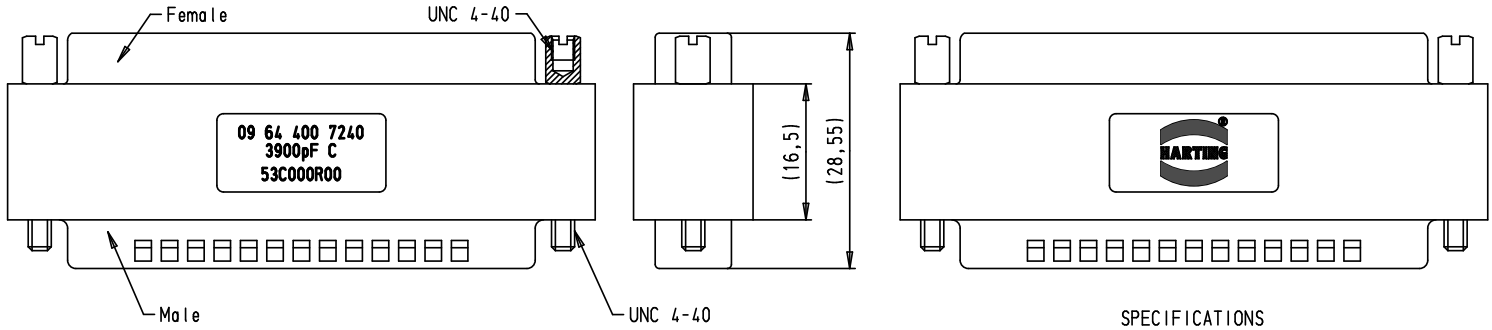

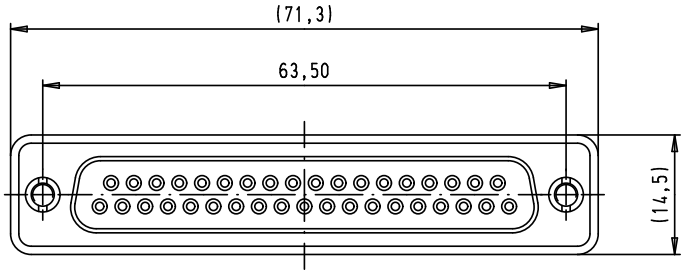

SPECIFICATIONS

Filter type	C
Capacitance	3900 pF±20%
Working voltage	100 V
Current rating	6,5 A

Minimum insertion loss

FREQUENCY (MHz)	ATTENUATION (dB)
1	1
5	6
10	11
50	25
100	35
500	35
1000	32

Note: Jack-screws are not pre-mounted to allow mounting from any ends

Mod.	Dat.	Name		Dat.	Name
			Detail.	03/09/07	JS
			Insp.		
34901	01/04/08	BB	Stand.		
34894	12/03/08	PK			
	03/09/07	JS			

All Dim. in mm
Orig. Size DIN A 4

HARTING EURL
F-95972 Paris

Male / Female D-Sub filter adapter, 37 poles, 3900 pF

Maßstab/ *Scale* 1,5:1

TB 09 64 400 7240

Sub.

Blatt/ *Page* 1/1

Downloaded from Elcodis.com electronic components distributor