

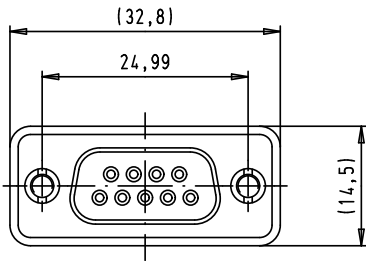



Alle Rechte vorbehalten/ All rights reserved



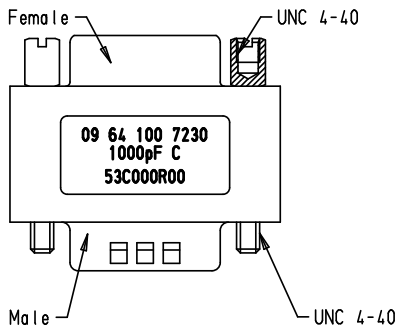

SPECIFICATIONS

| | |
|-----------------|-------------|
| Filter type | C |
| Capacitance | 1000 pF±20% |
| Working voltage | 100 V |
| Current rating | 6,5 A |

Minimum insertion loss

| FREQUENCY (MHz) | ATTENUATION (dB) |
|-----------------|------------------|
| 5 | 1 |
| 10 | 3 |
| 50 | 12 |
| 100 | 20 |
| 500 | 34 |
| 1000 | 30 |

Note: Jack-screws are not pre-mounted to allow mounting from any ends

| Mod. | Det. | Name | Det. | Name |  All Dim. in mm Orig. Size DIN A 4 | Male / Female D-Sub filter adapter, 9 poles, 1000 pF | Maßstab/ Scale 1,5:1 |
|-------|----------|------|-------------------------------|----------|---|--|----------------------------|
| | | | Detail. | 03/09/07 | | | |
| 34901 | 01/04/08 | BB | Insp. | | | | |
| 34894 | 12/03/08 | PK | Stand. | | | | |
| | 03/09/07 | JS | | | | | |
| | | | HARTING EURL F-95972 Paris | |  | TB 09 64 100 7230 | Blatt/ Page 1 / 1 |
| | | | | | | Sub. | |