



Material and Finish

Shell: Steel, tin plated
 Insulator: PBT with glass-fiber reinforcement, UL94V-0 rated, Color- Teal, pantone 322C
 Contact Material: Socket- Phosphor bronze
 Contact Plating Options:
 Standard: gold flash on mating end, tin on termination end, with entire contact nickel underplated
 15 Option: 15u" gold on mating end, tin on termination end, with entire contact nickel underplated
 30 Option: 30u" gold on mating end, tin on termination end, with entire contact nickel underplated

Specifications

Rated Current: 2A
 Rated Voltage: 30V RMS
 Withstanding Voltage: 500v(r.m.s.) AC for 1 min
 Insulation Resistance: More than 1000Mohm at 500v DC
 Contact Resistance: 13mohm Max.
 Dielectric Strength: 1000v for 1 min
 Temperature: -55C° to +105C°

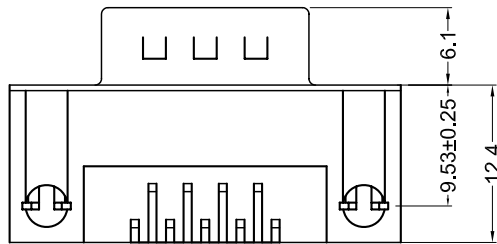

Ordering Information

Part Number	Contact Area Plating Finish
K22X-E9P-N-99	Gold Flash (standard)
K22X-E9P-N15-99	15u" Gold (15 option)
K22X-E9P-N30-99	30u" Gold (30 option)


Tolerances
X.X ± 0.25
X.XX ± 0.15
Unless Stated Otherwise



REV.	DATE	DESCRIPTION	REV. BY	CHK. BY	DRAWN BY	DATE
A1	12/16/05	New Drawing	R. Aguirre	H. MA	R. Aguirre	9/28/05
A2	02/21/08	ECO # 07-049	S. Vien	H. MA		

K22X-E9P-N-99

D-sub, Right Angle, PC99 Color, RoHS Compliant
 9 Pos. Male, 0.318" Footprint



UNITS
mm