


# PLCC Sockets

151-1530, 151-1546, 151-1570, 151-1586



PLCC Sockets

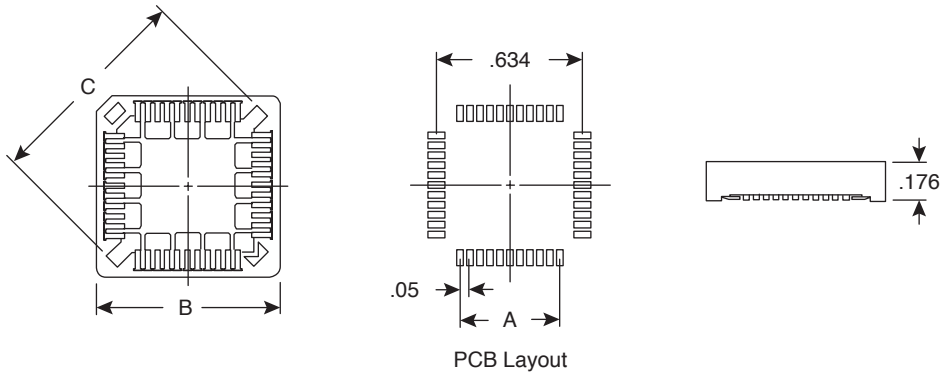

Dimensions: In.

## SPECIFICATIONS

<b>Type:</b>	Surface Mount PLCC
<b>Contact Resistance:</b>	30mΩ max. @ 100mA DC
<b>Insulation Resistance:</b>	1000MΩ min. @ 500VDC
<b>Current Rating:</b>	1A
<b>Voltage Rating:</b>	500VAC for 1 Minute
<b>Operating Temperature:</b>	-65°C ~ +125°C

## MATERIALS

<b>Solder Pads:</b>	.03" x .075"
<b>Contacts:</b>	Tin Plated Phosphor Bronze
<b>Housing:</b>	PPS & 40% Glass Fiber

MOUSER STOCK NO.	No. of Contacts	Dimensions: In.		
		A	B	C
151-1530	28	.30	.709	.771
151-1546	44	.50	.928	1.09
151-1570	68	.80	1.25	1.51
151-1586	84	1	1.42	1.76

Date Last Revised: 10-18-05

Available from Mouser Electronics  
1-800-346-6873  
www.mouser.com

KC-300748

151-1530, 151-1546, 151-1570, 151-1586