


PLCC Sockets

151-1532, 151-1533



PLCC Sockets

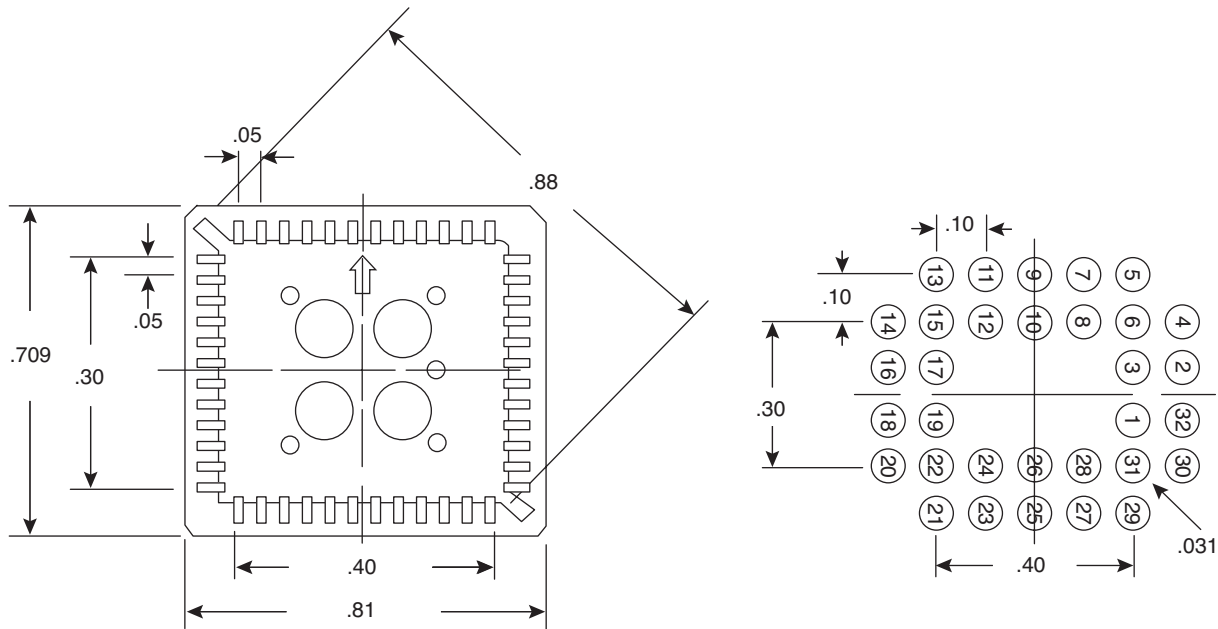

Dimensions: In.

SPECIFICATIONS	
Type:	PLCC 32 Pin. Thru-Hole
Contact Resistance:	30mΩ max. @ 100mA DC
Insulation Resistance:	1000MΩ min. @ 500VDC
Current Rating:	1A
Voltage Rating:	500VAC for 1 Minute
Operating Temperature:	-65°C ~ +125°C

MATERIALS	
Contacts:	151-1532 - Tin Plated Phosphor Bronze, 151-1533 - Gold Plated Phosphor Bronze
Housing:	PPS & 40% Glass Fiber

Date Last Revised: 10-18-05

Available from Mouser Electronics
1-800-346-6873
www.mouser.com

KC-300752

151-1532, 151-1533