


Alle Rechte vorbehalten. All rights reserved.

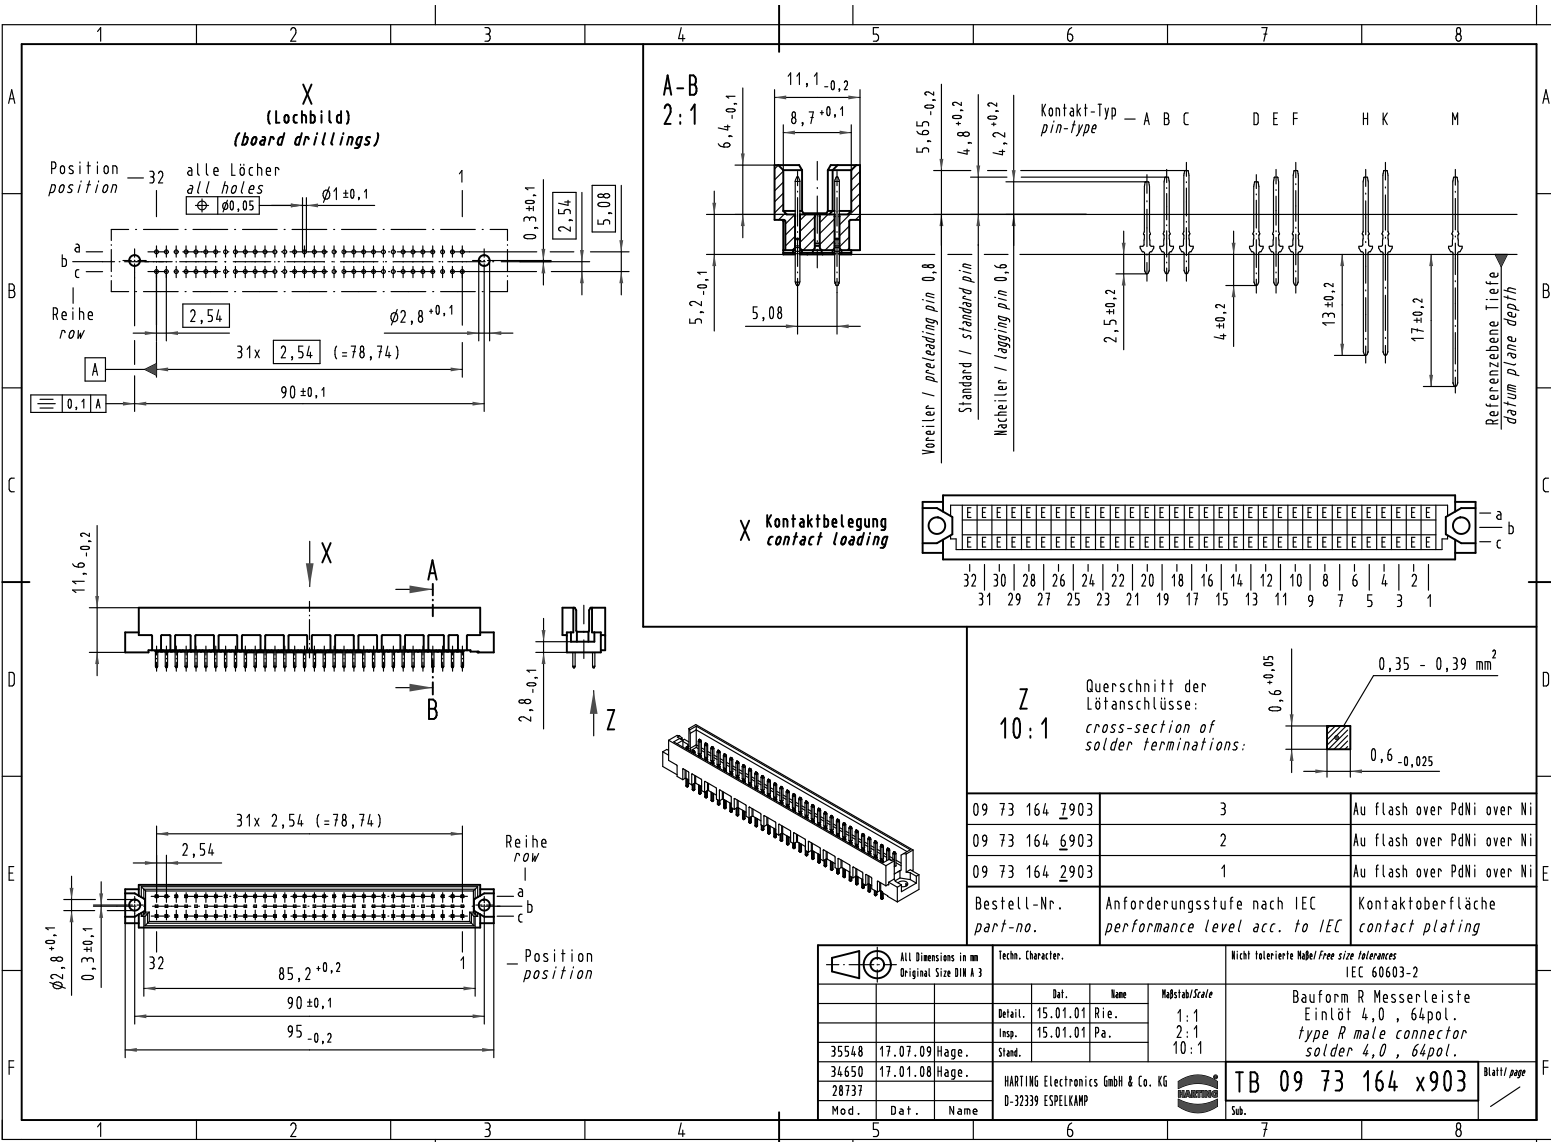

Z Querschnitt der Lötanschlüsse:
cross-section of solder terminations:

0,6 ± 0,05
0,35 - 0,39 mm²
0,6 - 0,025

| | | |
|----------------------|--|-----------------------------------|
| 09 73 164 1903 | 3 | Au flash over PdNi over Ni |
| 09 73 164 6903 | 2 | Au flash over PdNi over Ni |
| 09 73 164 2903 | 1 | Au flash over PdNi over Ni |
| Bestell-Nr. part-no. | Anforderungsstufe nach IEC performance level acc. to IEC | Kontaktoberfläche contact plating |

| | | | | | |
|--|----------|-------------------|-----------------------------------|--|--|
| All Dimensions in mm Original Size DIN A 3 | | Techn. Character. | | Nicht tolerierte Maß/Free size Tolerances IEC 60603-2 | |
| | | Dat. | Name | Maßstab/Scale 1:1 2:1 10:1 | |
| | | Detail. | 15.01.01 Rie. | Bauform R Messerleiste Einlötl 4,0, 64pol. type R male connector solder 4,0, 64pol. | |
| | | Insp. | 15.01.01 Pa. | TB 09 73 164 x903 Blatt/page | |
| | | Stand. | | Sub. | |
| 35548 | 17.07.09 | Hage. | | | |
| 34650 | 17.01.08 | Hage. | HARTING Electronics GmbH & Co. KG | TB 09 73 164 x903 Blatt/page | |
| 28737 | | | D-32339 ESPELKAMP | Sub. | |
| Mod. | Dat. | Name | | Sub. | |