

Customer Information Sheet

DRAWING No.: M20-107XX00

SHEET 2 OF 2


IF IN DOUBT - ASK

©

NOT TO SCALE


THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

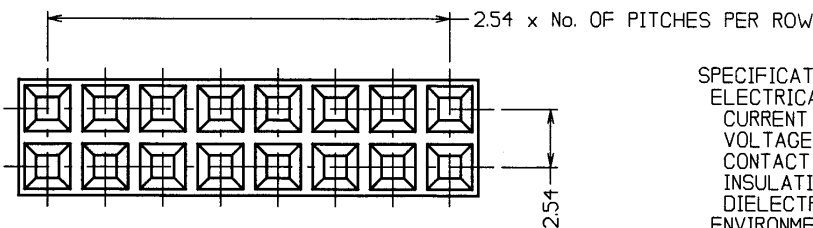

ORDER CODE:
M20-107XX00
 No. OF WAYS PER ROW
 02 TO 12

SPECIFICATIONS:
ELECTRICAL:
 CURRENT RATING = 3A AC/DC
 VOLTAGE RATING = 250V AC MAX
 CONTACT RESISTANCE = 20 MILLIOHMS MAX
 INSULATION RESISTANCE = 5,000 MEGOHMS MIN
 DIELECTRIC STRENGTH = 1,500V AC FOR 1 MINUTE
ENVIRONMENTAL:
 TEMPERATURE RANGE = -40°C TO +105°C

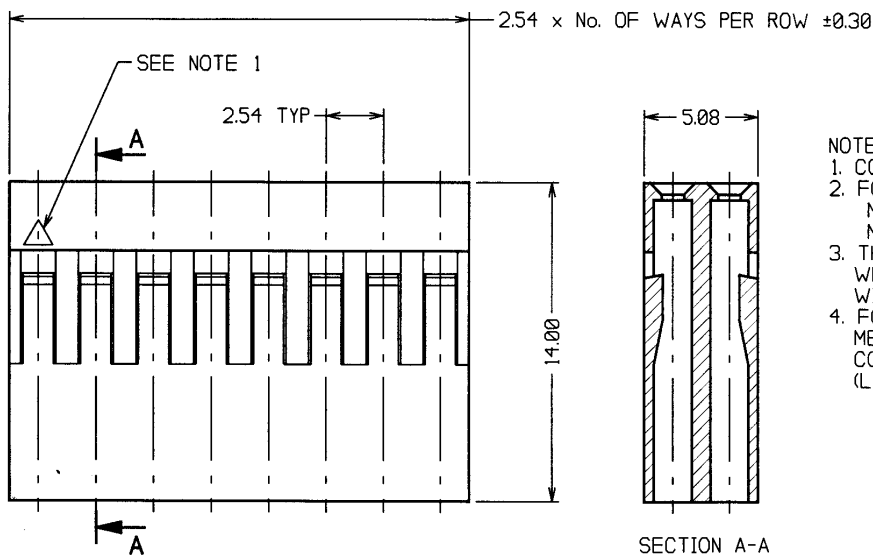

NOTES:
 1. CONTACT No. 1 MARKER SYMBOL.
 2. FOR USE WITH CRIMP CONTACTS:
 M20-11600XX (REELED CONTACTS),
 M20-11800XX (LOOSE CONTACTS).
 3. THE ABOVE SPECIFICATIONS APPLY
 WHEN THIS MOULDING IS USED
 WITH THE SPECIFIED CONTACTS.
 4. FOR COMPLETE ELECTRICAL AND
 MECHANICAL SPECIFICATIONS, SEE
 COMPONENT SPECIFICATION C001XX
 (LATEST ISSUE).

WJB	3	19.06.01	5994
NAME	ISS.	DATE	C/NOTE
APPROVED:	<i>[Signature]</i>		
CHECKED:	<i>[Signature]</i>		
DRAWN:	A. CIOTTA		
CUSTOMER REF.:			
ASSEMBLY DRG.:			

HARWIN

HARWIN INC
 U.S.A.
 TEL: (812) 285 0055
 FAX: (812) 285 0056

HARWIN PLC
 U.K.
 TEL: 023 9237 0451
 FAX: 023 9231 4590

HARWIN PTE
 SINGAPORE
 TEL: 65 7794909
 FAX: 65 7793868

THIS DRAWING AND ANY
 INFORMATION OR DESCRIPTIVE
 MATTER SET OUT HEREON ARE
 CONFIDENTIAL AND COPYRIGHT
 PROPERTY OF THE HARWIN
 GROUP AND MUST NOT BE
 DISCLOSED, LOANED, COPIED
 OR USED FOR MANUFACTURING,
 TENDERING OR FOR ANY
 OTHER PURPOSE WITHOUT
 THEIR WRITTEN PERMISSION

TOLERANCES
 X. - ±1mm
 X.X - ±0.25mm
 X.XX - ±0.10mm
 X.XXX - ±0.01mm
 ANGLES - ±5°
 UNLESS STATED

MATERIAL:
 MODIFIED PPO
 UL94V-1 BLACK
FINISH: CLEAN
S/AREA: mm²

TITLE:
 2.54mm PITCH DIL
 CRIMP MOULDING
DRAWING NUMBER:
M20-107XX00
 SHT
 2
 OF
 2