


REV.	DATE	DESCRIPTION
NC	05/07/00	INITIAL RELEASE
A	10/18/06	UPDATE DRAWING FORMAT

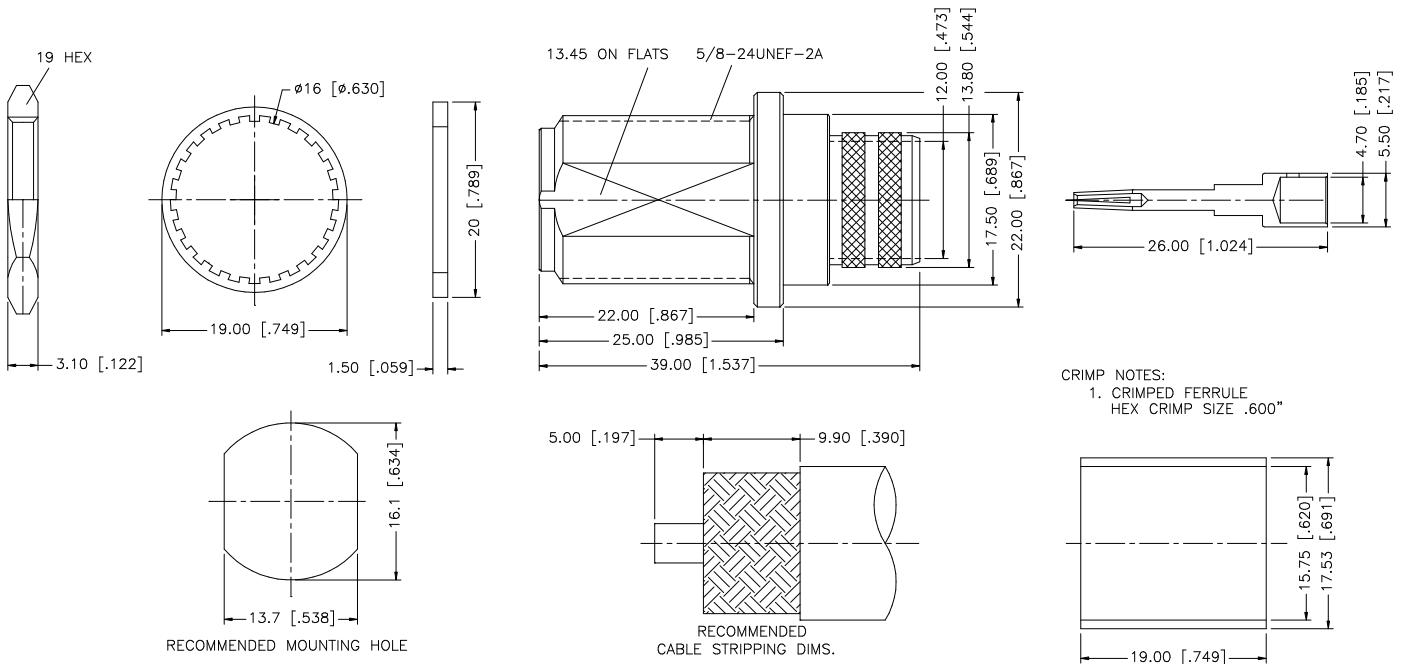

CRIMP NOTES:
1. CRIMPED FERRULE
HEX CRIMP SIZE .600"

DESCRIPTION	MATERIAL	FINISH	QTY	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex		
8				UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020" DO NOT SCALE DRAWING	DRAWN	G.R.S.		10/18/06	PART DESCRIPTION N BULKHEAD CRIMP JACK (LMR 600 CABLE)
7					CHECKED				
6					ISSUED				
5					SHEET	1 OF 1			
4	FERRULE	COPPER	NICKEL		1			PART NO. 172264	
3	CONTACT PIN	BER. COPPER	GOLD		1				
2	INSULATOR	TEFLON	NATURAL		1			DWG. NO. 172264.DWG	
1	BODY	BRASS	NICKEL		1				
					CAD FILE	C:/172/172264.DWG	REV. A	SIZE A	SCALE NA