

Micro-B Receptacle, 0.65mm Pitch, Right Angle, SMT, Standard Type .

Features & Benefits

- Micro-USB(USB3.0) Standard Compliance.
- Provides the interface for Super Speed up to 5 Gbps data rate.
- Small and durable more than mini – USB.
- Stable signal transmission.
- Materials use for lead-free reflow process, Halogen Free , and RoHS.
- 6 Soldered Pads at shell ensure No Damage when :
Peel Strength 150N Min applied.
Wrenching Strength 25N Max applied .
- Greater real estate space savings.
- Reliable Co-planarity within a 0.08mm.

Reference Information

Packaging : Tape & Reel.
 Durability : 10,000 Cycles Min.
 Insertion Force: 35N Max.
 Withdrawal Force: 8N Min. After 10,000 cycles.



Physical

Housing: High Temperature Thermoplastic.
 UL 94V-0,
 Color: Black.
 Contact: Phosphor Bronze.
 Shell: Stainless Steel.
 Contact Plating: Gold Flash overall.
 Contact Area— 30 μ" Gold.
 Shell Plating: Plated Gold at the Soldered Pad Area.

Electrical


Voltage Rating : 30V AC
 Current Rating : Other Pins-- 0.25A min.
 Pin 1 & Pin 5-- 1.8A.
 Signal Pin-- 1A. (USB2.0)
 Contact Resistance: Pin 1 & Pin 5-- 30mΩ Max.
 Other Pins-- 50mΩ Max.
 Withstanding Voltage : 100V AC/1min.
 Insulation Resistance : 100MΩ Min.
 Operating Temperature: -20°C to +60°C
 Impedance: 90Ω +/-15 Ω@ 50 ps rise time (20%~80%).

GSB343133HR



Dimension / P.C Board Layout

Design in: mm

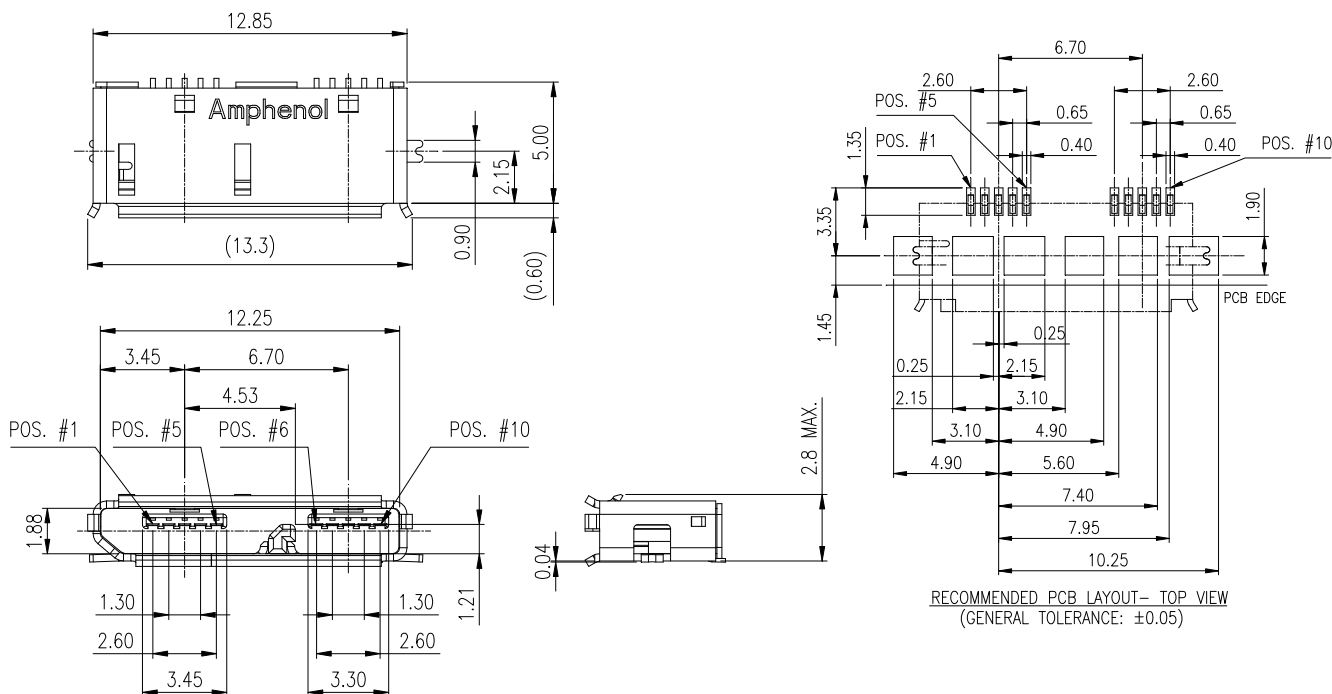

I/O Connector