

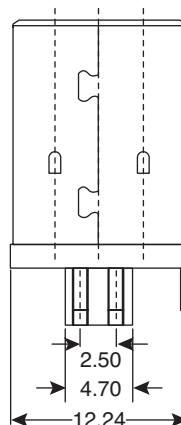
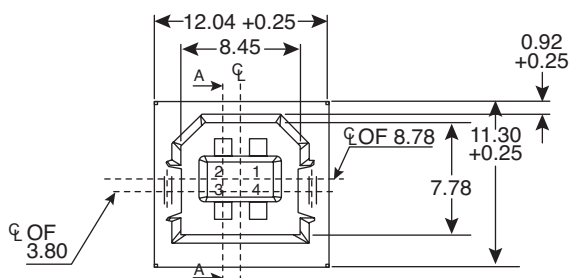



USB Connector B Type Receptacle and Solder Tail

154-UBW21-E

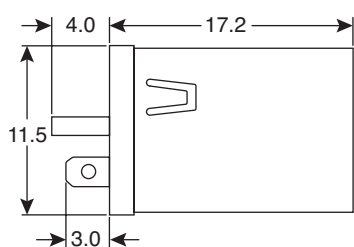

USB Connector B Type Receptacle and Solder Tail



Dimensions: mm

Electrical Specifications

| | |
|---------------------------------------|--------------------------|
| Contact Resistance: | 30 Milliohms max. |
| Dielectric w/standing Voltage: | 750 VAC |
| Insulator Resistance: | 1,000 Megohms min. |
| Capacitance: | 2 picofarads max. @ 1KHz |

Specifications

| | |
|---------------------|-------------------|
| Voltage: | 39.2 Newtons max. |
| Current: | 9.8 Newtons min. |
| Temperature: | -55°C to +85°C |

Materials

| | |
|------------------|---|
| Shell: | Copper Alloy; Tin-Lead or gold plated over copper |
| Housing: | Thermoplastic, glass filled, 130°C |
| Contacts: | Copper Alloy; 5μ" gold plated |

RoHS Compliant

Date Last Revised: 7-19-06

Available from Mouser Electronics
1-800-346-6873
www.mouser.com

KC-301020

154-UBW21-E