


IEEE 1394 Firewire, 6 Pin Receptacle

154-FWR80-E

KOBICONN

IEEE 1394 Firewire, 6 Pin Receptacle

Dimensions: mm (In.)

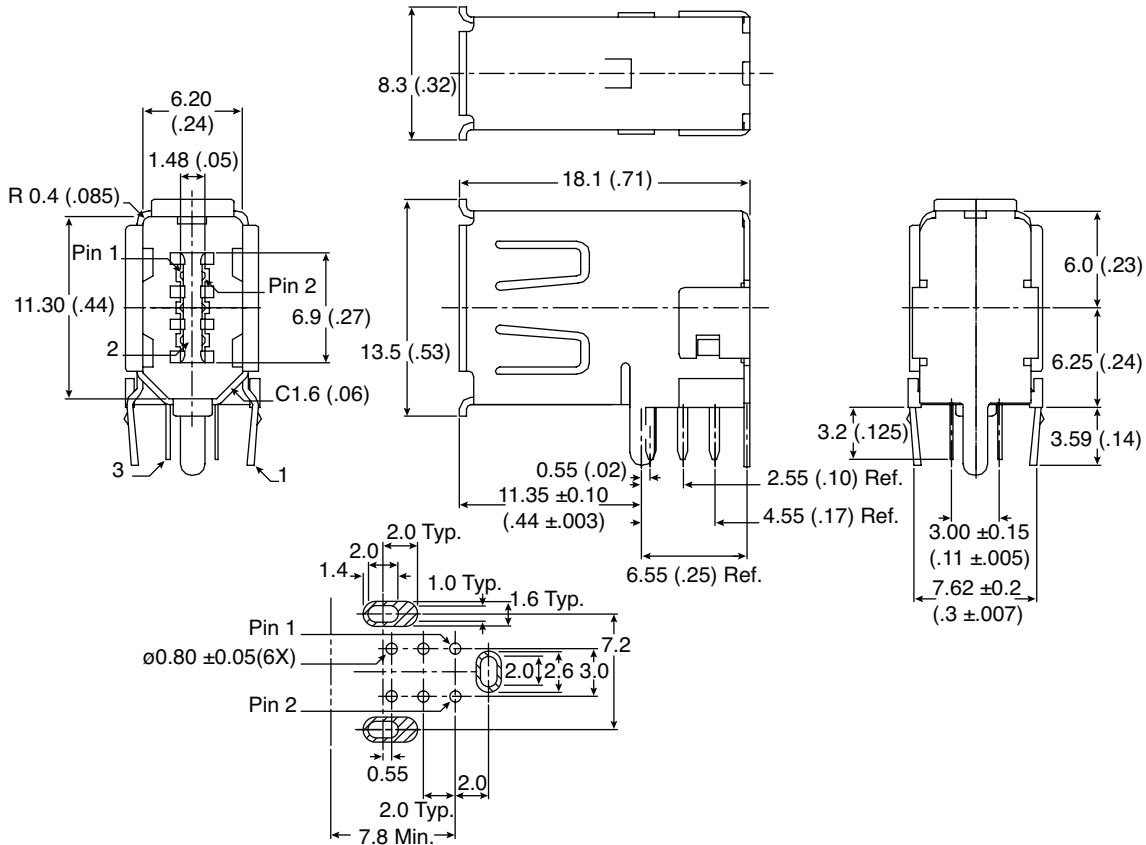

Notes

Withstanding Voltage:	DC 500 $\pm 50V$
Insulation Resistance:	100 Megohms min.
Contact Resistance:	30 Milliohms max.

SPECIFICATIONS

Part Name	Item	Qty.	Material	Note
Contacts:	3	6	Copper Alloy/ Selective Gold Plated	30 μ " Gold Plating 30 μ " Terminal for Phosphor Bronze
Housing:	2	1	Thermoplastic	
Shell:	1	1	Copper Alloy/ Tin-Lead Plated over Nickel	
RoHS Compliant				

Date Last Revised: 7-12-06

Available from Mouser Electronics
1-800-346-6873
www.mouser.com

KC-300998

154-FWR80-E