


# IEEE 1394 Firewire, 4 Pin Plug Solder Type

154-AVW10-E, 154-AVW10-34K-E,  
154-AVW10-U4K-E, 154-AVW10-D4K-E



IEEE 1394 Firewire, 4 Pin Plug Solder Type

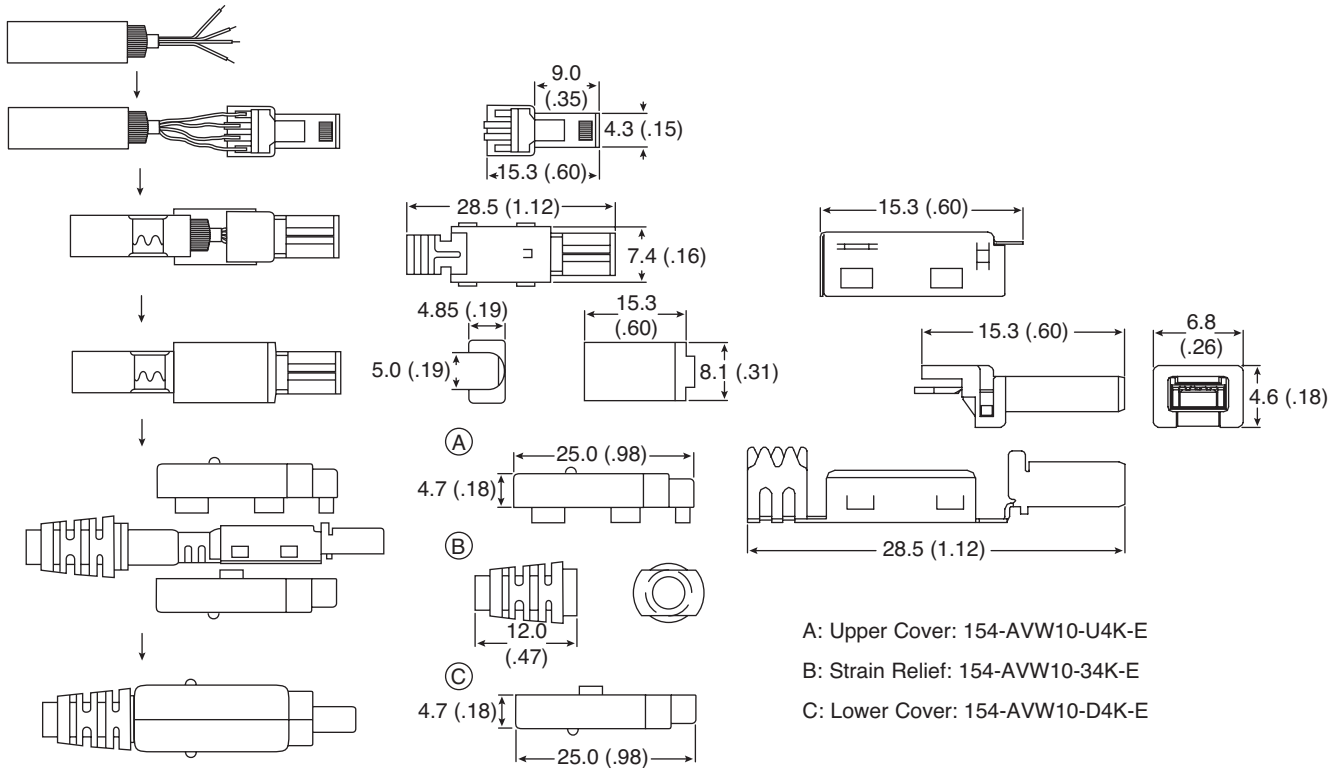

154-AVW10-E, 154-AVW10-34K-E,  
154-AVW10-U4K-E, 154-AVW10-D4K-E

## Specifications

<b>Voltage:</b>	30 VAC (R.M.S.)
<b>Current:</b>	1.0 Ampere max./ contact at 30°C T-Rise
<b>Temperature:</b>	80°C
<b>Contact Resistance:</b>	30 Milliohms max. initial
<b>Insulation Resistance:</b>	100 Megaohms min.
<b>Dielectric Withstanding Voltage:</b>	100 VAC at sea level
<b>Contact Plating:</b>	30μ" Au
<b>Shell Plating:</b>	Nickel plating
<b>Clamp &amp; SR Dimensions:</b>	Clamp ø4.0mm, SR ø4.5mm
RoHS Compliant	

Date Last Revised: 7-26-07

Available from Mouser Electronics  
1-800-346-6873 / [www.mouser.com](http://www.mouser.com)

KC-301001

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.