


USB Connector B Type Receptacle Vertical Single Deck Thru-hole

154-UBS21-E

KOBICONN

USB Connector B Type Receptacle Vertical Single Deck Thru-hole

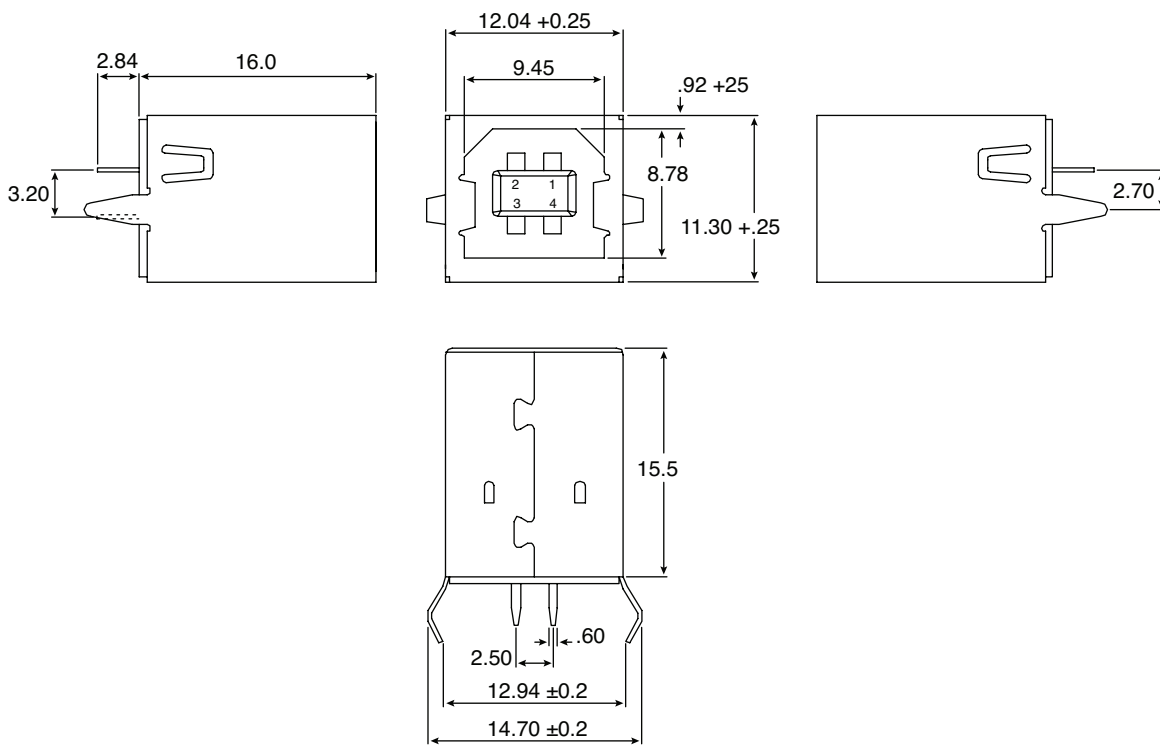

Dimensions: mm

SPECIFICATIONS

| Part Name | Item | Qty. | Material |
|------------------|------|------|--|
| Contacts: | 3 | 4 | Copper Alloy/Selective Gold Plating: 2 - $A\mu 5\mu$ "; 5 - $A\mu 30\mu$ " |
| Housing: | 2 | 1 | Thermoplastic, Glass filled, 240°C |
| Shell: | 1 | 1 | Copper Alloy/ Tin-Lead Plated over Copper |
| RoHS Compliant | | | |

Electrical Specifications

| | |
|---------------------------------------|-------------------------|
| Contact Resistance: | 30 Milliohms max. |
| Dielectric w/standing Voltage: | 500 VAC |
| Insulator Resistance: | 1,000 Megaohms min. |
| Current Rating: | 1.5 Ampere max. @ 30°C |
| Temperature Range: | -55°C to +85°C |
| Voltage: | 30 VAC |
| Capacitance: | 2 Picofarads max @ 1KHz |

Date Last Revised: 7-12-06

Available from **Mouser Electronics**
1-800-346-6873
www.mouser.com

KC-301015

154-UBS21-E