

Material:

- Body: Polyamide PA 6
25 % Glass fiber Reinforced
- Seal: Neoprene
- ECA clamping ring: Polycarbonate

Characteristics:

- PG/Metric thread
- Extended thread available
- Strain relief through clamping ring

Applications:

- For explosion endangered areas according to EN 50014 and EN 50019
- Machines and devices
- Measuring and control engineering
- Plant installations



Temperature Range PA 6 -20 to 55°C (-4 to 131 °F)

Thread Size	Dimensions					
	H mm	E mm	L mm	ØC mm	ØP mm	ØPG/M mm
PG9	19	8	32	8.5	9.0	15.2
PG11	22	8	35	11.5	11.0	18.6
PG13.5	24	9	36	12.5	13.5	20.4
PG16	27	10	40	14.5	15.0	22.5
PG21	33	11	44	18.5	19.0	28.3
PG29	42	12	55	25.0	25.0	37.0
M 16x1.5	19	8	32	8.5	9.0	16.0
M 20x1.5/13	24	9	36	12.5	13.5	20.0
M 20x1.5/16	27	9	39	14.5	15.0	20.0
M 25x1.5	33	11	44	18.5	19.0	25.0
M 32x1.5	42	12	55	25.0	25.0	32.0


Gland must be mounted with flat seal and lockout.



ECA Clamping Ring (Punchout Seal)

L.C.I.E. ATEX

Outer thread	Clamping range mm	Cat. No. Dark Grey	Cat. No. Black	Std. Pk.
PG				
PG 9	3.5 - 8.5	5507009	5507050	50
PG 11	4.0 - 10.5	5507011	5507051	50
PG 13.5	5.0 - 12.5	5507013	5507052	50
PG 16	6.5 - 14.0	5507016	5507053	50
PG 21	8.0 - 18.5	5507021	5507054	20
PG 29	10.0 - 25.0	5507029	5507055	20
Metric				
M 16 x 1.5	3.5 - 8.5	5507216	5507250	50
M 20 x 1.5/13	5.0 - 12.5	5507220	5507251	50
M 20 x 1.5/16	6.5 - 14.0	5507221	5507252	50
M 25 x 1.5	8.0 - 18.5	5507225	5507253	20
M 32 x 1.5	10.0 - 25.0	5507232	5507254	20

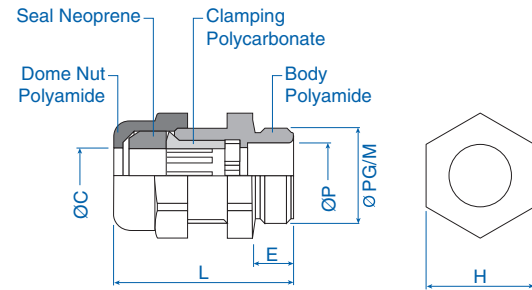

Short Seal

L.C.I.E. ATEX

Outer thread	Clamping range mm	Cat. No. Dark Grey	Cat. No. Black	Std. Pk.
PG				
PG 9	4.5 - 8.0	5508009	5508050	50
PG 11	5.5 - 10.5	5508011	5508051	50
PG 13.5	7.0 - 12.0	5508013	5508052	50
PG 16	9.0 - 14.0	5508016	5508053	50
PG 21	11.5 - 18.0	5508021	5508054	20
PG 29	16.0 - 24.5	5508029	5508055	20
Metric				
M 16 x 1.5	4.5 - 8.0	5808216	5808250	50
M 20 x 1.5/13	7.0 - 12.0	5808220	5808251	50
M 20 x 1.5/16	9.0 - 14.0	5808221	5808252	50
M 25 x 1.5	11.5 - 18.0	5808225	5808253	20
M 32 x 1.5	16.0 - 24.5	5808232	5808254	20

