




## Heyco® Dome Plugs

- Closes unneeded panel holes.
- Convex, matte finish head tapers to thin edge (Except DP-187).
- Multiple sizes for use in .187" (4,7 mm) to 6.00" (152,4 mm) diameter holes.
- Locks firmly into panel up to .250" (6,4 mm) thick.
- Quick and easy installation.

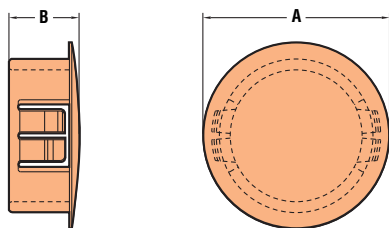

PANEL DIMENSIONS				PART NO.		DESCRIPTION	PART DIMENSIONS			
Maximum Thickness		Mounting Hole Diameter		Black	White		A Head Diameter		B Overall Height	
in.	mm.	in.	mm.			in.	mm.	in.	mm.	
.062	1,6	.187	4,7	*2590	*2591	** DP-187	.250	6,4	.234	5,9
.062	1,6	.250	6,4	2603	2604	** DP-250	.312	7,9	.312	7,9
.062	1,6	.312	7,9	2613	2614	** DP-312	.375	9,5	.312	7,9
.125	3,2	.375	9,5	2617	2618	DP-375	.468	11,9	.406	10,3
.125	3,2	.437	11,1	2633	2634	DP-437	.531	13,5	.406	10,3
.125	3,2	.500	12,7	2643	2644	DP-500	.578	14,7	.406	10,3
.125	3,2	.562	14,3	2653	2654	DP-562	.656	16,7	.406	10,3
.125	3,2	.625	15,9	2663	2664	DP-625	.718	18,2	.406	10,3
.125	3,2	.687	17,4	2673	2674	DP-687	.781	19,8	.406	10,3
.125	3,2	.750	19,1	2683	2684	DP-750	.921	23,4	.406	10,3
.125	3,2	.812	20,6	2693	2694	DP-812	.890	22,6	.406	10,3
.125	3,2	.875	22,2	2703	2704	DP-875	1.015	25,8	.453	11,5
.125	3,2	1.000	25,4	2713	2714	DP-1000	1.203	30,6	.453	11,5
.125	3,2	1.093	27,8	2723	2724	DP-1093	1.218	30,9	.453	11,5
.125	3,2	1.125	28,6							
.125	3,2	1.187	30,1	2733	2734	DP-1187	1.332	33,3	.453	11,5
.125	3,2	1.250	31,7	2740	2741	DP-1250	1.375	34,9	.453	11,5
.125	3,2	1.375	34,9	2753	2754	DP-1375	1.500	38,1	.453	11,5
.125	3,2	1.500	38,1	2763	2764	DP-1500	1.671	42,4	.453	11,5
.125	3,2	1.750	44,5	2773	2774	DP-1750	1.916	48,7	.453	11,5
.125	3,2	2.000	50,8	2783	2784	DP-2000	2.170	55,1	.469	11,9
.250	6,4	2.093-	53,2	2403	2404	DP-2.093	2.343	59,9	.760	19,3
.250	6,4	2.125	54,0							
.250	6,4	2.250	57,2	2411	2412	DP-2.25	2.479	63,0	.750	19,1
.250	6,4	2.500	63,5	2790	2791	DP-2.5	2.730	69,5	.750	19,1
.250	6,4	3.000	76,2	2455	2456	DP-3.0	3.171	80,5	.750	19,1
.250	6,4	3.375	85,7	2482	2483	DP-3.375	3.656	92,9	.750	19,1
.250	6,4	3.500	88,9	2464	2465	DP-3.5	3.656	92,9	.750	19,1
.250	6,4	4.000	101,6	2473	2474	DP-4.0	4.156	105,6	.750	19,1
.250	6,4	5.000	127,0	2451	2452	DP-5.0	5.219	132,5	.781	19,8
.250	6,4	6.000	152,4	2453	2454	DP-6.0	6.219	157,9	.781	19,8

Standard colors black or white. Consult Heyco for other colors.  
 Locking fingers in fractional increments up to the maximum panel thickness.  
 \*Convex, glossy finish head tapers to thin edge.  
 Approximate Head Thickness: .063" (1,6mm). Thickness may vary.  
 \*\*Depicts single locking finger design.

Quick  
Specs

**Material** 6/6 Nylon  
**Certifications** Recognized under the Component Program of Underwriters' Laboratories File E51579  
 Certified by the Canadian Standards Association File LR8919  
**Flammability Rating** 94V-2  
**Material Temperature Index** 257°F (125°C)—Maximum temperature on part not to exceed 221°F (105°C)