




Heyco® Liquid Tight Hole Plugs

- V0 Flammability rating.
- Oil tight, rain tight, submersible.
- UL certified for UV and outdoor applications
- Three trade sizes fit 1/2" to 1" knock-out holes.
- Multiple nominal sizes fit .500" to 1.00" "true size" mounting holes.
- Locks firmly in boxes from .030" (0,8 mm) to .125" (3,2 mm) thick.
- Installs with fingertip pressure (no tool required).
- Trade sizes are listed under Underwriters' Laboratories File E51579 and certified by Canadian Standard Association File LR081067C.
- True sizes are recognized under Underwriters' Laboratories File E51579 and certified by Canadian Standard Association File LR008919C.

PANEL DIMENSIONS				PART NO.	DESCRIPTION	PART DIMENSIONS					
Maximum Thickness		Mounting Hole Diameter				A Head Diameter		B Overall Height		C Head Thickness	
in.	mm.	in.	mm.	Black		in.	mm.	in.	mm.	in.	mm.
.125	3,2	.500	12,7	3830	KOS-LT 500	.910	23,1	.450	11,4	.290	7,4
.125	3,2	.625	15,9	3834	KOS-LT 625	1.030	26,2	.470	11,9	.310	7,9
.125	3,2	.750	19,1	3831	KOS-LT 750	1.150	29,2	.510	13,0	.350	8,9
.125	3,2	.875	22,2	3833	KOS-LT 1/2	1.281	32,5	.530	13,5	.360	9,1
.125	3,2	1.000	25,4	3832	KOS-LT 1000	1.410	35,8	.560	14,2	.400	10,2
.125	3,2	1.093	27,8	3835	KOS-LT 3/4	1.520	38,6	.550	14,0	.400	10,2
.125	3,2	1.375	34,9	3837	KOS-LT 1	1.780	45,2	.562	14,3	.421	10,7

Standard color black.

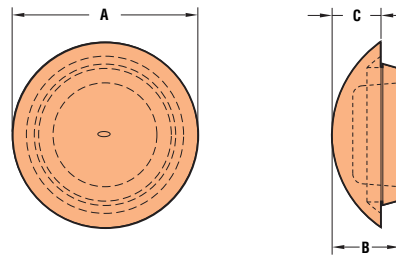

Quick Specs

Material
Flammability Rating

Santoprene™
94V-0