



# Heyco® Liquid Tight Cordgrips Straight-Thru, PG Hubs

For Flexible Cords. For use in clearance or threaded holes.





CABLE DIA. RANGE				PART NO.		DESCRIPTION	PART DIMENSIONS									
Min. Dia.		Max. Dia.		Black	Gray		A Clearance Hole		B Max. O.A. Length		C Thread Length		D Wrenching Nut Thk.		E Wrenching Flats	
in.	mm.	in.	mm.				in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
.064	1,6	.210	5,3	<b>3444</b>	<b>3445</b>	RLTF 7	.492	12,5	1.17	29,7	.33	8,4	.20	5,1	.59	15,0
.114	2,9	.250	6,4	<b>3207</b>	<b>3208</b>	LTF 7										
.069	1,8	.187	4,7	<b>3446</b>	<b>3447</b>	RLTF 9	.599	15,2	1.30	33,0	.34	8,6	.20	5,1	.75	19,1
.181	4,6	.312	7,9	<b>3210</b>	<b>3211</b>	LTF 9										
.069	1,8	.250	6,6	<b>3448</b>	<b>3449</b>	RLTF 11	.733	18,6	1.46	37,1	.39	9,9	.20	5,1	.86	21,8
.230	5,8	.395	10,0	<b>3213</b>	<b>3214</b>	LTF 11										
.170	4,3	.450	11,9	<b>3216</b>	<b>3217</b>	* LTF 13.5	.804	20,4	1.53	38,9	.41	10,4	.20	5,1	.95	24,1
.230	5,8	.530	13,9	<b>3219</b>	<b>3220</b>	* LTF 16	.886	22,5	1.66	42,2	.45	11,4	.23	5,8	1.05	26,7
.250	6,4	.490	12,3	<b>3454</b>	<b>3455</b>	* RLTF 21	1.115	28,3	1.87	47,5	.52	13,2	.23	5,8	1.30	33,0
.450	11,4	.705	18,0	<b>3222</b>	<b>3223</b>	* LTF 21										
.590	15,0	.990	25,4	<b>3225</b>	<b>3226</b>	* LTF 29	1.470	37,3	2.23	56,6	.59	15,0	.28	7,1	1.66	42,2
.787	20,0	1.020	26,0	<b>M3206</b>	<b>M3205</b>	* RLTCG 36	1.850	47,0	2.52	64,0	.51	12,9	.32	8,1	2.09	53,1
.875	22,0	1.260	32,0	<b>M3204</b>	<b>M3203</b>	* LTCG 36										
1.230	31,2	1.560	39,6	<b>M3212</b>	<b>M3209</b>	LTCG 42	2.130	54,1	2.50	63,5	.45	11,4	.36	9,1	2.48	63,0
1.000	25,4	1.240	31,5	<b>M3218</b>	<b>M3215</b>	RLTCG 42										
1.450	36,8	1.560	44,0	<b>M3281</b>	<b>M3282</b>	LTCG 48	2.340	59,4	2.63	66,7	.49	12,4	.42	10,7	2.75	69,9
1.160	29,5	1.560	34,3	<b>M3283</b>	<b>M3284</b>	RLTCG 48										

Standard colors black and gray.

\* Listed

- Multiple sizes for cable diameters ranging from .064" (1,6 mm) to 1.730" (44,0 mm).
- We recommend using the fitting with the smallest maximum diameter that will fit your application.
- Acme threads on body prevent skipping and speed installation.
- All nylon construction with TPE or Buna N Sealing Gland resists salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents. This feature is not assessed by UL.
- TPE Sealing Gland is used in LTF Series.
- Buna N Sealing Gland is used in LTCG Series.
- PG hub threads are steel conduit threads per DIN 40430.
- Suitable for NEMA type 6 enclosures.
- **Locknuts INCLUDED.**
- Consult Heyco for cordgrips molded in other colors.

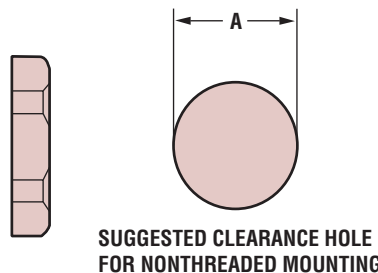

<b>Material</b>	6/6 Nylon with Buna N Sealing Gland (LTCG Series) or TPE Gland (LTF Series)
<b>Certifications</b>	Listed under Underwriters' Laboratories' File E51579 Recognized under the Component Program of Underwriters' Laboratories' File E51579 Certified by Canadian Standards Association File LR93876C
<b>Flammability Rating</b>	94V-2
<b>Temperature Rating</b>	Static -40°F (-40°C) to 239°F (115°C) Dynamic -4°F (-20°C) to 212°F (100°C)
<b>IP Rating</b>	IP 68 (70 PSI, 5 BAR)

Quick  
Specs