



# Heyco® Liquid Tight Cordgrips Straight-Thru, NPT Hubs


For Flexible Cords. For use in clearance or threaded holes.




- Multiple sizes for cable diameters ranging from .065" (1,7 mm) to 1.730" (44,0 mm).
- We recommend using the cordgrip with the smallest maximum diameter that will fit your application.
- Acme threads on body prevent skipping and speed installation.
- All nylon construction with TPE or Buna N Sealing Gland resists salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents. This feature is not assessed by UL.
- TPE Sealing Gland is used in LTF Series.
- Buna N Sealing Gland is used in LTCG Series.
- M Series (LTCGs) suitable for NEMA type 6 enclosures.
- **Locknuts not included.** For nylon locknut specifications or to order locknuts separately, see page 2-21.
- Consult Heyco for cordgrips molded in other colors.

CABLE DIA. RANGE				PART NO.		DESCRIPTION	PART DIMENSIONS									
Min. Dia.		Max. Dia.		Black	Gray		A Clearance Hole		B Max. O.A. Length		C Thread Length		D Wrenching Nut Thk.		E Wrenching Flats	
in.	mm.	in.	mm.			in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	
.065	1,7	.210	5,6	M4514	M4515	RLTCG 1/4	.540	13,7	1.28	32,8	.45	11,4	.21	5,3	.63	16,0
.115	2,9	.250	6,3	M4516	M4517	LTCG 1/4										
.069	1,8	.187	4,7	3458	3459	RLTF 3/8	.670	17,0	1.49	37,8	.53	13,5	.20	5,1	.75	19,1
.181	4,6	.312	7,9	3228	3229	LTF 3/8										
.170	4,3	.450	11,4	3231	3232	*LTF 1/2	.875	22,2	1.72	43,7	.62	15,7	.20	5,1	.95	24,1
.230	5,8	.546	13,9	3200	3201	*LLTF 1/2	.875	22,2	1.83	46,5	.62	15,7	.23	5,8	1.05	26,7
.250	6,4	.485	12,3	3460	3461	*RLTF 3/4	1.068	27,1	1.97	50,0	.63	16,0	.23	5,8	1.30	33,0
.450	11,4	.709	18,0	3234	3235	*LTF 3/4										
.490	12,0	.785	20,0	M8439	M8440	*RLTCG 1	1.326	33,7	2.41	61,2	.76	19,3	.30	7,6	1.73	43,9
.590	15,0	1.000	25,4	8437	8438	*LTF 1	1.350	34,3	2.42	61,5	.75	19,1	.28	7,1	1.65	41,9
.787	20,0	1.020	26,0	M4522	M4523	RLTCG 1-1/4	1.680	42,7	2.69	68,3	.78	19,8	.30	7,6	2.05	52,7
.875	22,3	1.260	32,0	M4524	M4525	LTCG 1-1/4										
1.230	31,2	1.730	44,0	M3317	M3318	LTCG 1-1/2	1.920	48,8	2.81	71,3	.76	19,3	.36	9,1	2.48	63,0
1.000	25,4	1.240	31,5	M3319	M3320	RLTCG 1-1/2										
1.450	36,8	1.560	39,6	M3321	M3322	LTCG 2	2.400	60,8	2.93	74,3	.79	20,1	.42	10,7	2.75	69,9
1.160	29,5	1.350	34,3	M3323	M3324	RLTCG 2										


Standard colors black and gray.  
\*UL Listed



SUGGESTED CLEARANCE HOLE FOR NONTHREADED MOUNTING

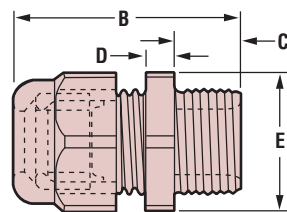

SEALING NUT

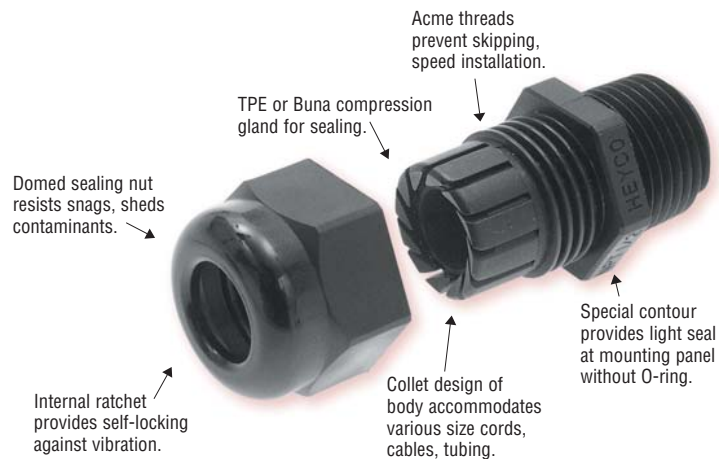

Consult Heyco for your alternate material requirements!

Quick Specs

Material	6/6 Nylon with Buna N Sealing Gland (LTCG Series) or TPE gland (LTF Series)
Certifications	<ul style="list-style-type: none"> <li>UL Listed under Underwriters' Laboratories File E51579</li> <li>Recognized Under the Component Program of Underwriters' Laboratories File E51579</li> <li>Certified by Canadian Standards Association File LR93876C</li> </ul>
Flammability Rating	94V-2
Temperature Rating	-22°F (-30°C) to 212°F (100°C)
IP Rating	IP 68 (70 PSI, 5 BAR)