





# Heyco® Liquid Tight Cordgrips Pigtail™, PG Hubs

For Flexible Cords. For use in clearance or threaded holes.

- Multiple sizes for cable diameters ranging from .064" (1,6 mm) to .709" (18,0 mm).
- We recommend using the fitting with the smallest maximum diameter that will fit your application.
- Acme threads on body prevent skipping and speed installation.
- All nylon construction with TPE gland resists salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents. This feature is not assessed by UL.
- Flexible Pigtail™ extender prevents sharp bends and extends cable life.
- PG hub threads are steel conduit threads per DIN 40430.
- Suitable for NEMA type 4 and 6 enclosures.
- **Locknuts INCLUDED.**
- Consult Heyco for cordgrips molded in other colors.

CABLE DIA. RANGE				PART NO.		DESCRIPTION	PART DIMENSIONS									
Min. Dia.		Max. Dia.		Black	Gray		A Clearance Hole		B Max. O.A. Length		C Thread Length		D Wrenching Nut Thk.		E Wrenching Flats	
in.	mm.	in.	mm.			in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	
.064	1,6	.210	5,3	<b>3464</b>	<b>3465</b>	FLEX RLTF 7	.492	12,5	2.44	62,0	.33	8,4	.20	5,1	.59	15,0
.114	2,9	.250	6,4	<b>3237</b>	<b>3238</b>	FLEX LTF 7										
.069	1,8	.187	4,7	<b>3466</b>	<b>3467</b>	FLEX RLTF 9	.599	15,2	2.77	70,4	.34	8,6	.20	5,1	.75	19,1
.181	4,6	.312	7,9	<b>3240</b>	<b>3241</b>	FLEX LTF 9										
.069	1,8	.260	6,6	<b>3468</b>	<b>3469</b>	FLEX RLTF 11	.733	18,6	3.44	87,4	.39	9,9	.20	5,1	.86	21,8
.230	5,8	.395	10,0	<b>3243</b>	<b>3244</b>	FLEX LTF 11										
.170	4,3	.450	11,4	<b>3246</b>	<b>3247</b>	*FLEX LTF 13.5	.804	20,4	3.88	98,6	.41	10,4	.20	5,1	.95	24,1
.230	5,8	.546	13,9	<b>3249</b>	<b>3250</b>	*FLEX LTF 16	.886	22,5	4.36	110,7	.45	11,4	.23	5,8	1.05	26,7
.250	6,4	.485	12,3	<b>3478</b>	<b>3479</b>	*FLEX RLTF 21	1.115	28,3	5.03	127,8	.52	13,2	.23	5,8	1.30	33,0
.450	11,4	.709	18,0	<b>3245</b>	<b>3248</b>	*FLEX LTF 21										

Standard colors black and gray.  
\* UL Listed

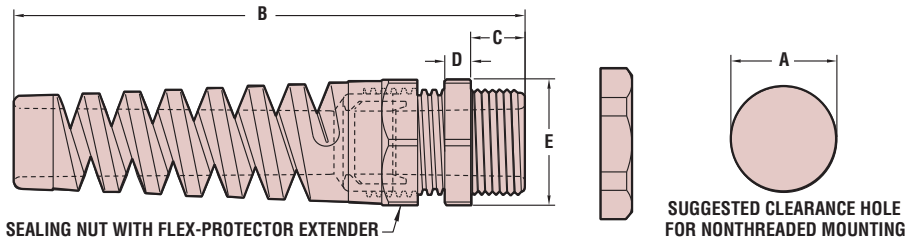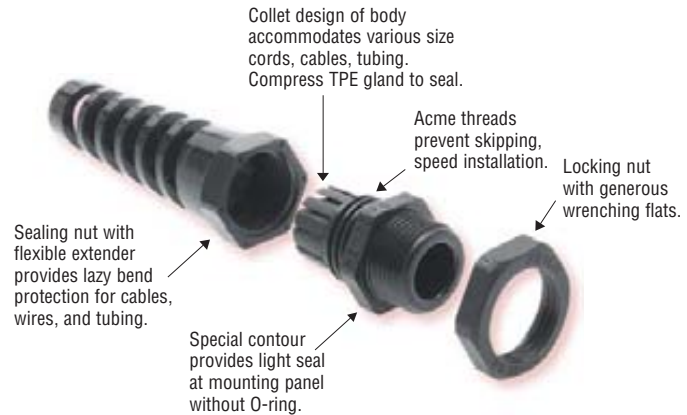

*Quick Specs*

Material	6/6 Nylon w/TPE Sealing Gland
Certifications	<ul style="list-style-type: none"> <li>UL Listed under Underwriters' Laboratories File E51579</li> <li>Recognized under the Component Program of Underwriters' Laboratories File E51579</li> <li>Certified by Canadian Standards Association File LR93876C</li> </ul>
Flammability Rating	94V-2
Temperature Rating	Static -40°F (-40°C) to 239°F (115°C) Dynamic -4°F (-20°C) to 212°F (100°C)
IP Rating	IP 68 (70 PSI, 5 BAR)