




## Heyco® PG Thread Taps

For Steel Conduit Threads per DIN 40430

- Use a starting tap for through-hole applications.
- For blind holes, thread first with a starting tap; finish bottoming the threads with a finishing tap.
- Flank angle 80°.
- Made of high-speed steel with ground threads for greater accuracy to assure optimum performance.
- Suitable for cutting alloy steel, bronze, and stainless.

THREAD TYPE AND SIZE	TAP DRILL DIAMETER mm.	DESCRIPTION	PART NO.		PART DIMENSIONS		
			Starting	Finishing	Major Diameter mm.	Length	
						Overall mm.	Thread mm.
PG 7	11,5	PG T 7	<b>0150</b>	<b>0151</b>	12,5	63,0	20,0
PG 9	14,0	PG T 9	<b>0153</b>	<b>0154</b>	15,2	70,0	20,0
PG 11	17,3	PG T 11	<b>0156</b>	<b>0157</b>	18,6	80,0	22,0
PG 13.5	19,0	PG T 13.5	<b>0159</b>	<b>0160</b>	20,4	80,0	22,0
PG 16	21,3	PG T 16	<b>0162</b>	<b>0163</b>	22,5	80,0	22,0
PG 21	27,0	PG T 21	<b>0165</b>	<b>0166</b>	28,3	90,0	22,0
PG 29	35,5	PG T 29	<b>0168</b>	<b>0169</b>	37,0	110,0	25,0




## Heyco® Sealing Washers

- For use with Heyco Liquid Tight Fittings and Liquid Tight Cordgrips.
- Liquid tight, dust tight, and oil tight at enclosure.
- Suitable for wet locations requiring a separate gasket between the box and fitting due to imperfections in the box.
- Also suitable for other panel or panel sealing applications.
- Easy to install since washers seal off on the perimeter, not on the connector threads.
- Special double sealing ridges compensate for minor unevenness at enclosure.

Will Fit These Electrical Fitting Trade Sizes-NPT	PART NO. Black	DESCRIPTION	PART DIMENSIONS					
			A Inside Diameter		B Outside Diameter		C Thickness	
			in.	mm.	in.	mm.	in.	mm.
1/4	<b>3258</b>	SW 1/4	.540	13,7	.796	20,2	.125	3,2
3/8	<b>3259</b>	SW 3/8	.670	17,1	1.002	25,5	.125	3,2
1/2	<b>3260</b>	SW 1/2	.820	20,8	1.240	31,5	.125	3,2
3/4	<b>3261</b>	SW 3/4	1.030	26,2	1.500	38,1	.135	3,4
1	<b>3262</b>	SW 1	1.281	32,5	1.770	45,0	.175	4,4
1-1/4	<b>3264</b>	SW 1-1/4	1.660	42,2	1.990	50,7	.160	4,1

Standard color black.

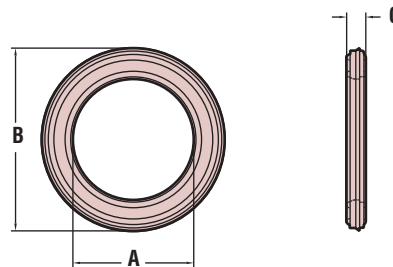

Quick Specs

### Sealing Washers

Material Thermoplastic Elastomer  
Flammability Rating 94V-0