









Heyco® Nylon D-Subminiature Mounting Hole Plugs

PANEL DIMENSIONS						PART NO. Black	DESCRIPTION	PART DIMENSIONS							
Maximum Thickness		Mounting Hole Diameter						Head				Body			
in.	mm.	A	B	in.	mm.			C	D	E	F	in.	mm.	in.	mm.
.17	4,3	.81	20,6	.450	11,4	2966	POP-DB9	1.25	31,8	.70	17,8	.69	17,5	.41	10,4
.17	4,3	1.13	28,8	.450	11,4	2968	POP-DB15	1.57	39,8	.70	17,8	1.05	26,7	.41	10,4
.17	4,3	1.67	42,5	.450	11,4	2970	POP-DB25	2.12	51,0	.70	17,8	1.55	39,4	.41	10,4
.17	4,3	2.32	59,1	.450	11,4	2972	POP-DB37	2.77	70,4	.70	17,8	2.23	56,6	.41	10,4

Standard color black. Consult Heyco for other colors.

- Covers unwanted holes in panel and is easily removable.
- Protection from dust particles.
- Provides aesthetic improvement for unused D-subminiature connector mounting holes.
- Fits standard D-Subminiature Cutouts for 9, 15, 25 and 37 pin connectors.
- Suitable for use as dust protection for unused parallel and serial ports on computers and other electrical equipment.
- Quick and easy installation with fingertip pressure.

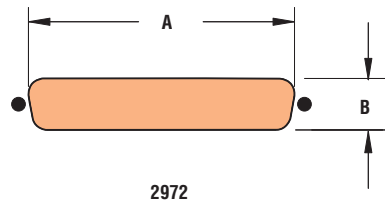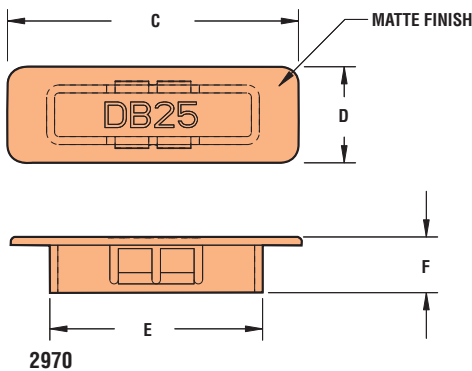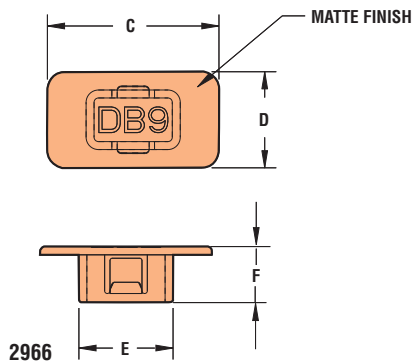

Custom Color Match and Special Engraved Identification Available. Consult Heyco for Details

Material	6/6 Nylon
Certifications	Recognized under the Component Program of Underwriters' Laboratories, File E51579
	Certified by Canadian Standards Association, File pending
Flammability Rating	94V-2
Material Temperature Index	257°F (125°C)–Maximum temperature on part not to exceed 221°F (105°C)

Quick Specs