




Heyco® Open/Closed Universal Bushings

- Split design allows side entry and encirclement of preassembled harnesses, power cords, capillary tubes or other assemblies that have segments larger than the bushing's ID.
- Parts can be assembled into holes that already contain cables or tubing.
- Only fingertip pressure required to snap-lock the bushing into its mounting hole.
- Flexible shutters adjust to accommodate and support any shape from .125" to a maximum diameter of 1.062".
- Absorbs vibration, cushions and insulates cables, tubing, hoses or shafts with limited internal clearance.
- Available in multiple sizes for use in .500" (12,7 mm) to 1.500" (38,1 mm) diameter holes.

| PANEL DIMENSIONS | | | | PART NO. | DESCRIPTION | PART DIMENSIONS | | | | | |
|-----------------------|-----|------------------------|------|---------------|-------------|----------------------|-----------------|-------|------------------|------|------|
| Maximum Thickness in. | | Mounting Hole Diameter | | | | Max. Inside Diameter | A Head Diameter | | B Overall Height | | |
| in. | mm. | in. | mm. | Black | | | | | | | |
| .125 | 3,2 | .500 | 12,7 | 2055SP | OCUB-500 | .312 | 7,6 | .562 | 14,3 | .385 | 9,8 |
| .125 | 3,2 | .625 | 15,9 | 2077SP | OCUB-625 | .437 | 11,1 | .718 | 18,2 | .406 | 10,3 |
| .125 | 3,2 | .750 | 19,0 | 2089SP | OCUB-750 | .500 | 12,7 | .812 | 20,6 | .406 | 10,3 |
| .125 | 3,2 | .875 | 22,2 | 2119SP | OCUB-875 | .562 | 14,3 | .921 | 23,4 | .406 | 10,3 |
| .125 | 3,2 | 1.000 | 25,4 | 2137SP | OCUB-1000 | .750 | 19,0 | 1.062 | 27,0 | .406 | 10,3 |
| .125 | 3,2 | 1.093 | 27,8 | 2157SP | OCUB-1093 | .812 | 20,6 | 1.187 | 30,2 | .406 | 10,3 |
| .125 | 3,2 | 1.250 | 31,8 | 2196SP | OCUB-1250 | .937 | 23,8 | 1.468 | 37,3 | .406 | 10,3 |
| .125 | 3,2 | 1.375 | 34,9 | 2184SP | OCUB-1375 | 1.000 | 25,4 | 1.468 | 37,3 | .406 | 10,3 |
| .125 | 3,2 | 1.500 | 38,1 | 2213SP | OCUB-1500 | 1.062 | 26,9 | 1.578 | 40,1 | .421 | 10,7 |

Standard color black. Consult Heyco for white and other colors.
Locking fingers in fractional increments up to the maximum panel thickness.

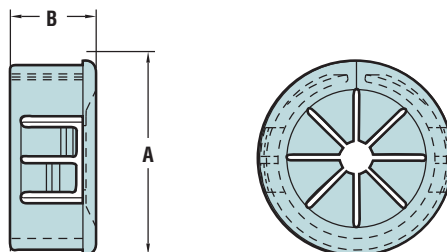

Quick Specs

Material 6/6 Nylon
 Certifications Recognized under the Component Program of Underwriters' Laboratories, File E15331
 Certified by the Canadian Standards Association, File LR8919
 Flammability Rating 94V-2
 Material Temperature Index 257°F (125°C)–Maximum temperature on part not to exceed 221°F (105°C)