



ALL NEW PRODUCTS!




Heyco® Louvered Plugs

PANEL DIMENSIONS				PART NO.		DESCRIPTION	PART DIMENSIONS			
Maximum Thickness		Mounting Hole Diameter		Black	White		A		B	
in.	mm.	in.	mm.				Head Diameter	Overall Height	in.	mm.
.125	3,2	.875	22,2	2557	2558	LP 875	1.015	25,8	.531	13,5
.125	3,2	1.000	25,4	2559	2560	LP 1000	1.205	30,6	.531	13,5
.125	3,2	1.093	27,8	2561	2562	LP1093	1.218	30,9	.531	13,5
.125	3,2	1.125	28,6							
.125	3,2	1.375	34,9	2567	2568	LP 1375	1.500	38,1	.543	13,8
.125	3,2	1.500	38,1	2569	2570	LP 1500	1.676	42,6	.543	13,8
.125	3,2	2.000	50,8	2594	2595	LP 2000	2.170	55,1	.543	13,8
.250	6,4	2.500	63,5	2596	2597	LP 2.5	2.718	69,0	.823	20,9
.250	6,4	3.000	76,2	2598	2599	LP 3.0	3.177	80,7	.823	20,9

Standard color black. Consult Heyco for other colors.
Locking fingers in fractional increments up to the maximum panel thickness.

- Louvers permit the passage of air for ventilation but limits liquid infiltration.
- Locks firmly into panel up to .250" (6,4 mm) thick.
- Quick and easy installation.
- Suitable for ventilation in electronic enclosures, motor housings and metal or plastic panels.
- Withstands a push back force of 35 lbs.

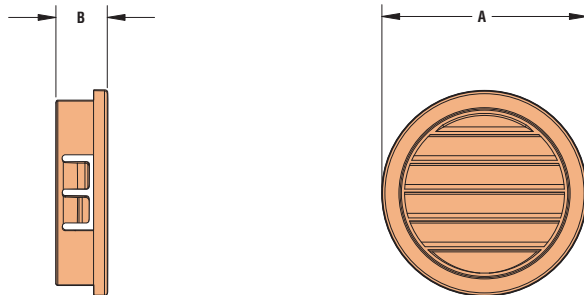

Material	6/6 Nylon
Flammability Rating	94V-2
Material Temperature Index	257°F (125°C)—Maximum temperature on part not to exceed 221°F (105°C)

Quick Specs