




## Heyco® Multi-Lockit™ Strain Reliefs For Round or Flat Cables

- Assembly friendly! Independent of insertion into the panel, Lockit Strain Reliefs self-lock onto the cable. Thus, they may be preassembled offline for final assembly at a later time or remote location, for lower installed cost!
- Large mounting hole design allows passage of plugs or bulky assemblies during Lockit installation.
- Lockit Strain Reliefs hold so well they pass the UL pull-out test requirements with or without panel support.
- They protect the lifeline of your electric/electronic products by absorbing the forces of push and pull that may be exerted on the flexible power cord. And, their rectangular design eliminates the possibility of part rotation under forces of twist.
- Fingertip pressure snaps the Lockit into the mounting hole.
- ST-101A designed to be installed in a "U" shape panel slot (see schematic). Securely anchors, insulates, and protects cables at panel entry point. Slim head profile makes Lockits design-specific.
- See page 3-1 for Heyco's Automated Pre-Assembly Equipment.

WILL FIT THESE CABLES				PANEL DIMENSIONS				PART NO.	DESCRIPTION
UL Type Designation	AWG Conductors	Approximate Size		Mounting Hole Size		Thickness			
		in.	mm.	in.	mm.	in.	mm.		
Round Cable	18/3	.250	6,4	1.142 x	29,0 x	.032	0,8	1843	LSR1939-300
Flat Cable		.173 x	4,39 x	1.142	29,0				
Cable SPT-3		.380	9,65						


Standard color black. Consult Heyco for white and other colors.

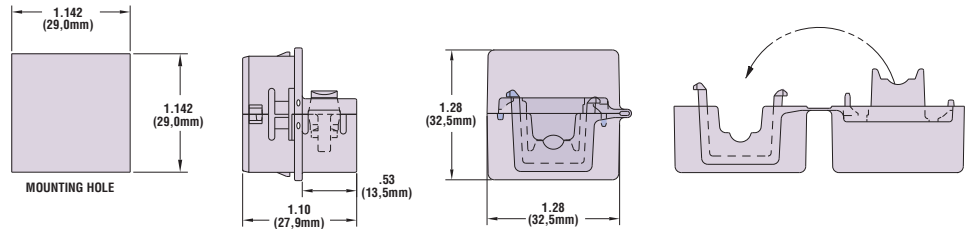

## Heyco® Lockit™ Strain Reliefs for U-Shape Slot For Round Cables

WILL FIT THESE CABLES				PANEL DIMENSIONS				PART NO.	DESCRIPTION
UL Type Designation	AWG Conductors	Approximate Size		Mounting Hole Size		Thickness			
		in.	mm.	in.	mm.	in.	mm.		
SV & SVT	18/2	.220	5,6	.453 x	11,5 x	.062	1,6	1839	ST-101A
	18/3	.245	6,2						
	18/3	.255	6,5						
HPD	18/2	.270	6,9	.512	13,0				
	16/2	.290	7,4						

Standard color black. Consult Heyco for white and other colors.

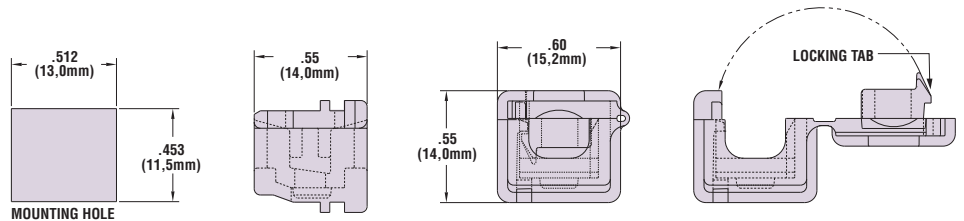

Quick Specs

Material	6/6 Nylon
Certifications	<ul style="list-style-type: none"> <li>UL Recognized under the Component Program of Underwriters' Laboratories File E15331 (far exceeds UL's 35# pull-out test).</li> <li>Canadian Certified by Canadian Standards Association File LR8919</li> </ul>
Flamability Rating	94V-2
Material Temperature Index	257°F (125°C)–Maximum temperature on part not to exceed 221°F (105°C)