


REV.	DATE	ECR NO.	DESCRIPTION
NC	04/17/00	-	INITIAL RELEASE
A	07/21/05	-	UPDATE DRAWING FORMAT
B	04/28/08	-	REVISE BARREL O.D. TO 2.69mm, FERRULE I.D. TO 3.2mm

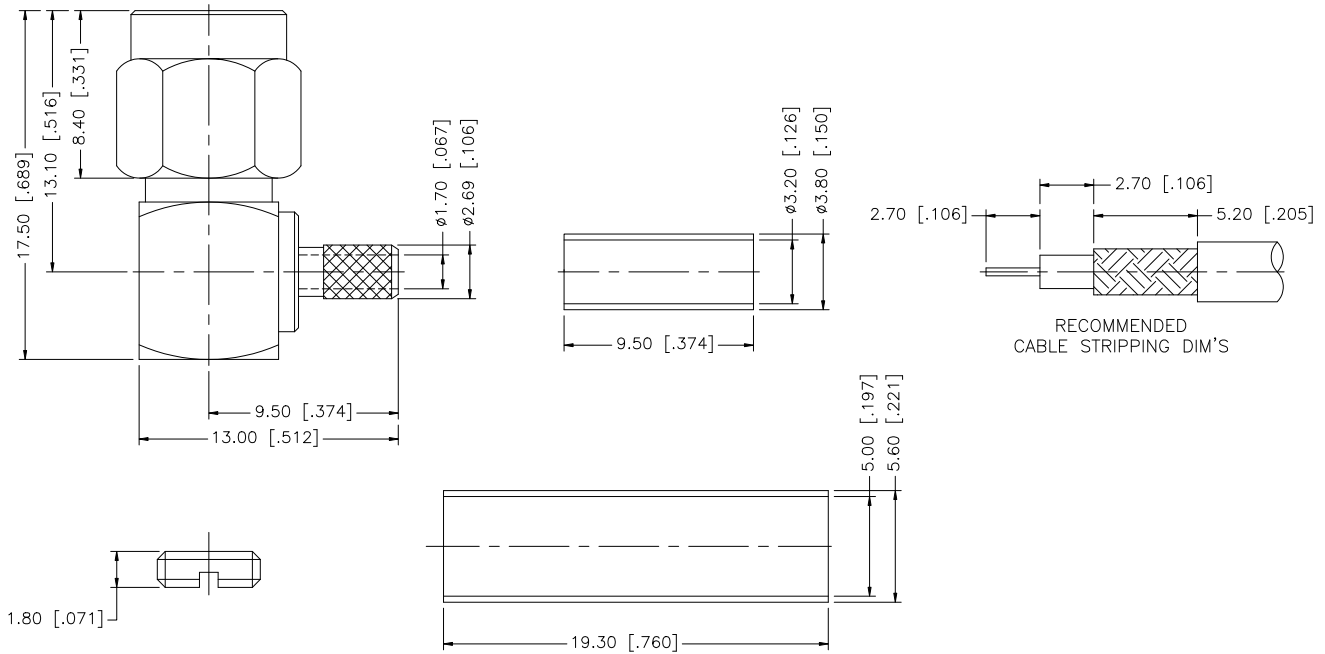

NOTES:  
1. CRIMPED FERRULE HEX CRIMP SIZE .128"

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	<b>Amphenol Connex</b>						
8					DRAWN	G.R.S.					04/28/08	PART DESCRIPTION <b>SMA R/A CRIMP PLUG, REVERSE POLARIZED (FOR RG-174/U, 188/U, 316/U CABLE)</b>	
7					CHECKED			PART NO. <b>132123RP</b>					
6					ISSUED							DWG. NO. 132123RP.DWG	
5	HEAT SHRINK TUBE			1	SHEET	1 OF 1		REV.	B	SIZE	A		
4	FERRULE	COPPER	GOLD	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"				DO NOT SCALE DRAWING				
3	CONTACT PIN	BRASS	GOLD	1	CAD FILE C:/132/132123RP.DWG								
2	INSULATOR	TEFLON	NATURAL	1									
1	BODY	BRASS	GOLD	1									