
AVX MOBO® Spring Contact Interconnect Solutions



Version 9.1



Table of Contents

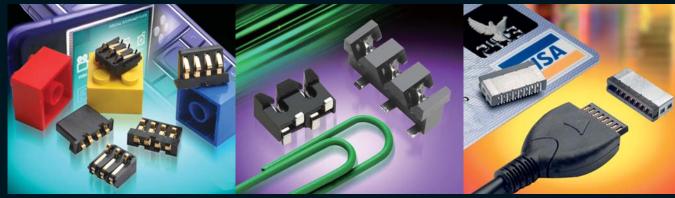


BATTERY CONNECTORS, SERIES 9155	2-16
Battery; Standard Size	2
Battery; Reduced Size	4
Battery; Ultra Low Profile	
Battery; Solderless	9
Battery; 3.0mm Right Angle	10
Battery; 2.5mm Right Angle	13
SIM CARD CONNECTORS SERIES 9162	17-24
Slide-In SIM	17
SIM Block	19
SIM Connector with Locking Latch	21
SIM/microSD Micro Combination	23
BOARD TO BOARD, SERIES 9158	25-32
SOLO Stacker, 9158 Series	
Staggered SOLO Stacker, 9188 Series	27
Ultra Low Profile Stacker, 9258 Series	31
I/O CONNECTORS	33-45
Standard I/O, 15 Position, 9157 Series	
Standard I/O, 19 Position, 9157 Series	
Reduced Size I/O, 9257 Series	39
Mini I/O, 9257 Series	42
WIRE TO BOARD IDC CONNECTORS	46-52
Wire to Board IDC Connectors, Series 9175	
Wire to Board IDC Connectors, Series 9176	48
Wire to Board IDC Connectors, Series 9177	50

NOTICE: Specifications are subject to change without notice. Contact your nearest AVX Sales Office for the latest specifications. All statements, information and data given herein are believed to be accurate and reliable, but are presented without guarantee, warranty, or responsibility of any kind, expressed or implied. Statements or suggestions concerning possible use of our products are made without representation or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent. The user should not assume that all safety measures are indicated or that other measures may not be required. Specifications are typical and may not apply to all applications.



9155 Standard Battery



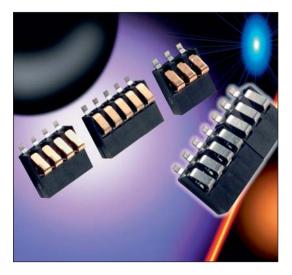

GENERAL DESCRIPTION

The standard battery connector is specifically designed for mobile equipment. The connectors are available in 3, 4 and 5 contact positions all on a 2.50mm pitch. The insulator height provides a 3mm spacing, with various contact nose heights from 1.20mm to 2.60mm, to provide spacing options to the end user.

All contacts are stamped and are rated to 3A, with Gold plating. Parts are supplied in tape and reel for automatic pick and place. Optional retaining brackets are available to provide greater strength when connected to the PCB.

Whatever your requirements, the 9155 series Battery Connector can also be customized to suit your applications.

APPLICATIONS


- Mobile Phones
- PDA
- Medical
- PMR
- Industrial

KEY FEATURES AND BENEFITS


- Suitable for 5000 mechanical cycles.
- Variety of contact heights offered to suit different mechanical designs.
- Connectors can be end to end stackable.
- RoHS Compliant available.




3 Way Battery Connector

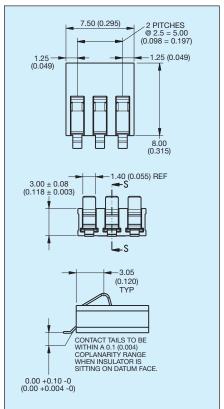

4 Way Battery Connector

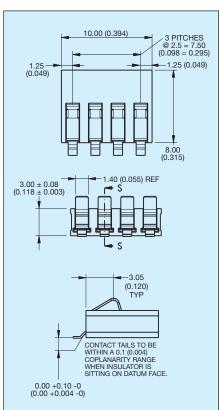

5 Way Battery Connector

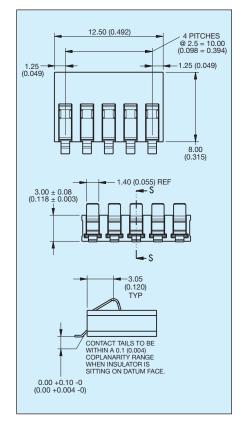




9155 Standard Battery




3 Way PCB Board Layout


3.60 (0.142) 2.50 (0.098) (ELECTRICALLY ISOLATED) 7.30 (0.287) 7.30 (0.287) 2 PITCHES 2 2.5 = 5.00 (0.098 = 0.197) (0.059 X 0.059) (3 POSITIONS)

4 Way PCB Board Layout

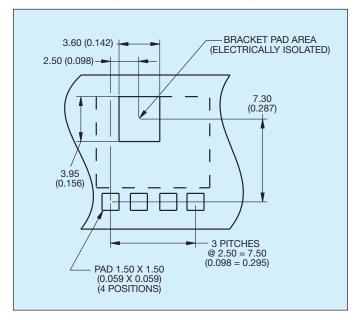

5 Way PCB Board Layout

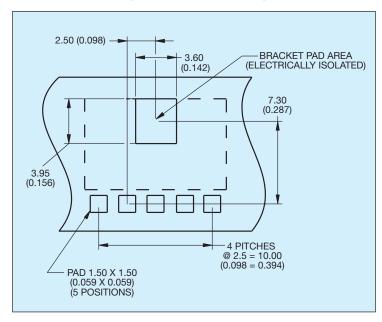

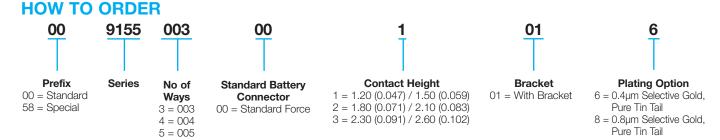



9155 Size Reduced Battery Connector

GENERAL DESCRIPTION

The newest product in AVX's Interconnect family of battery connectors saves 50% in volume over the initial 9155 series compression connectors as illustrated in the photograph. These connectors are rated at a full 3 amps per contact on 2.5mm centers. Sizes range from 2 positions through 5 positions and are end to end stackable.

APPLICATIONS

- Cellular Phones
- Handheld Devices
- Industrial Modules
- Medical Electronics

KEY FEATURES AND BENEFITS

- 2.4mm insulator height
- 3 amps/contact
- Large SMT mounting area for positive mechanical attachment
- 5k mating cycles
- End-to-end stackable





HOW TO ORDER





Code	No. of Ways	Reel Qty	Packing Qty
002	2	2000	2000
003	3	2000	2000
004	4	2000	2000
005	5	2000	2000



Code Description
201 Reduced Size Battery Connector



Code Description				
	0.4µm Selective Gold, Pure Tin Tail			
008	0.8µm Selective Gold, Pure Tin Tail			




9155 Size Reduced Battery Connector


2 Way Reduced Battery Connector

5.00 (0.197) 2.50 (0.098) CONTACT TAILS TO BE WITHIN 0.13 COPLANARITY RANGE 4.00 (0.157) SECTION X - X SHOWING CONTACTS DEFLECTED TO 2.5mm 4.92 (0.194) REF


4 Way Reduced Battery Connector

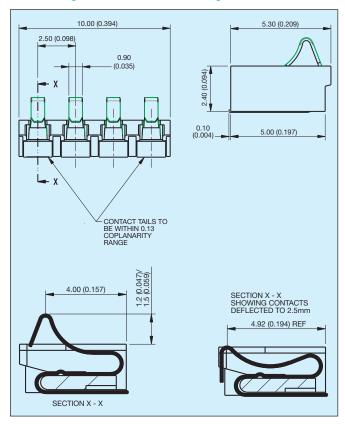

3 Way Reduced Battery Connector

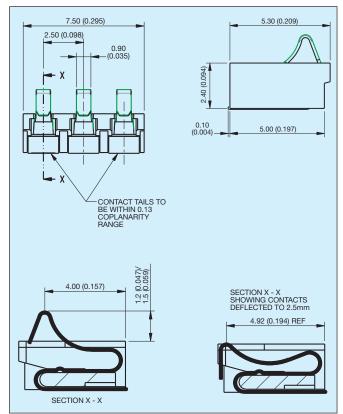


5 Way Reduced Battery Connector

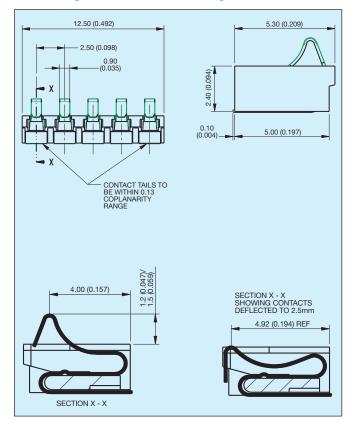




9155 Size Reduced Battery Connector


2 Way Reduced Battery Connector PCB Layout

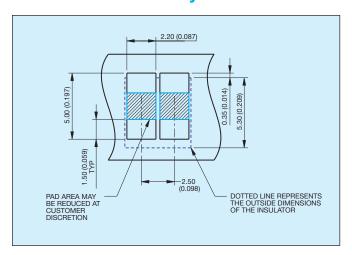


4 Way Reduced Battery Connector PCB Layout

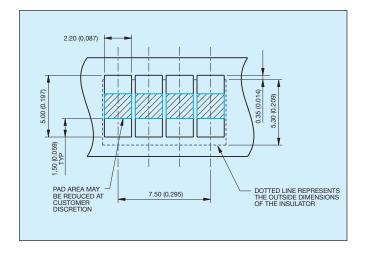

3 Way Reduced Battery Connector PCB Layout

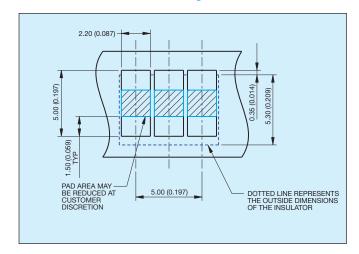

5 Way Reduced Battery Connector PCB Layout

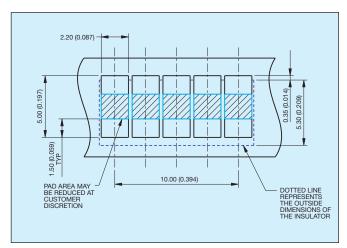

9155 Ultra-Low Profile Battery



GENERAL DESCRIPTION

The AVX Interconnect group has released a new ultra-low profile 3 amp per contact connector for battery pack or slide-in module applications. The compressed "Z" axis height of 1.3mm leads the industry from a profile standpoint. The initial product is in a 2 & 3 position configuration with other sizes expected to follow. The connector has an integral end block to act as a mechanical stop.

APPLICATIONS

- Cellular Phones
- Handheld Devices
- Industrial Modules
- Medical Electronics

KEY FEATURES AND BENEFITS


- Ultra-Low Profile
- 3 amps/contact
- Integral End Stop
- 5k mating cycles






HOW TO ORDER









I	Code	Description	Operating Height
	101	Low Profile Battery Connector	1.30 (0.051)

101



Plating Option Description 0.4µm Selective Gold, Pure Tin Tail 0.8µm Selective Gold, Pure Tin Tail


2 Way Low Profile Battery Connector

2.00 1.20 ^(0.079) (0.098)DOTTED LINE IS CONTACT CENTER LINE 2.50 6.60 (0.260) 5.10 (0.201) Ø 2.00 PICK AND PLACE AREA OR RECTANGLE (0.108)0.70 (0.028) 2.75 7.57 (0.298) .30 (0.051) MAX BATTERY PACK INSERTION DIRECTION (0.102)SECTION A-A CONTACT UNDEFLECTED CONTACT SHOWN WITH STOP

3 Way Low Profile Battery Connector

Code

006

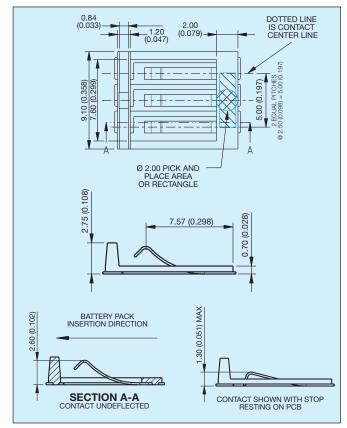





9155 Ultra-Low Profile Battery



2 Way Low Profile Battery Connector PCB Layout

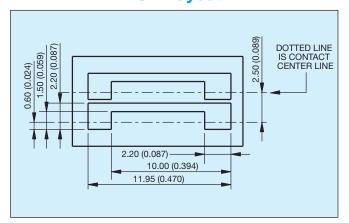

3 Way Low Profile Battery Connector PCB Layout

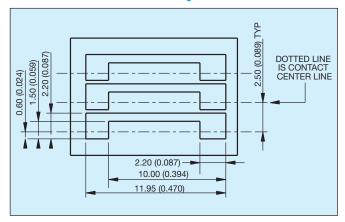

9155 MOBO® Solderless Battery Connectors






GENERAL DESCRIPTION

As an addition to our range of Battery connectors we have added a solderless termination option. This option has the termination area gold plated and the contact form is compression to the PCB and to the Battery which is used in the end equipment.

Rated at 3 Amps and 5,000 operations (the same as the SMT version). These battery connectors compliment the existing standard range of RoHS compliant components giving the designer an added option of the solderless termination.

When these connectors are held in place by the casing of the end equipment, the connection to the PCB is achieved by compressing the connector contacts against the PCB and against the actual battery. It is the housing which maintains the connection.

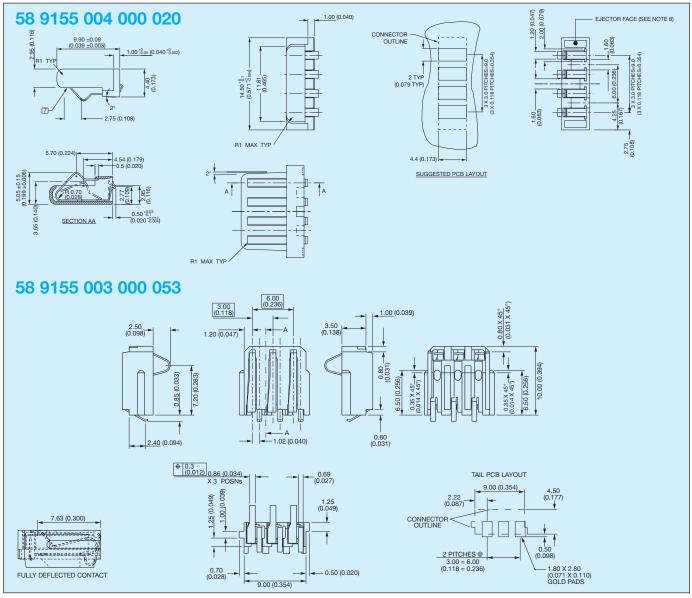

9155 MOBO® 3.0mm Pitch Right Angle **Battery Connectors**



GENERAL DESCRIPTION

A further addition to the battery connector range offered by AVX is a 90 degree version. On a 3mm pitch, offered in 2 to 5 contact positions and rated as with all of the battery range at 3 amps. The connector's design is small and compact to minimize its profile yet stable while having a contact point 4.61mm above the PCB.

The stability comes from the addition of extra SMT anchor brackets that are in between the SMT contact pads and both at the front of the connector and within the row of the contact SMT pads.

As with the other 9155 series of battery connectors offered by AVX the 90 degree version is rated at 3 amps and 5000 mating cycles, RoHS compliant and using high temperature plastic enables the connectors to be processed at up to 260°C.



APPLICATIONS

- Mobile phones
- Digital music players
- Hand held terminals
- Data terminals or any other small portable device

002


FEATURES AND BENEFITS



- Simple designed spring contact
- End to end stackable for larger pin counts
- Additional contact anchor brackets to added stability on the PCB
- Robust to shock and vibration
- Selectively plated contact area

HOW TO ORDER 9155

00





Battery Connector			
Description			
Right Angle 3.00mm			
Battery Connector			




Plating Option

Code	Description
006	0.4µm Selective Gold, Pure Tin Tail
800	0.8µm Selective Gold, Pure Tin Tail


9155 MOBO® 3.0mm Pitch Right Angle Battery Connectors




2 Way Right Angle Battery Connector

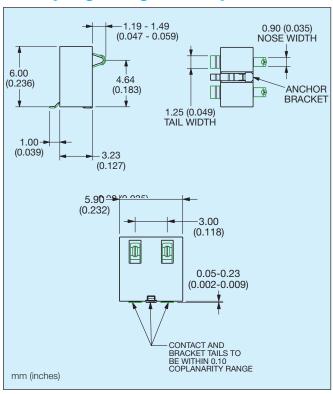


3 Way Right Angle Battery Connector

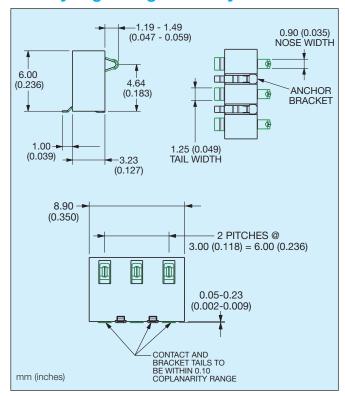

4 Way Right Angle Battery Connector

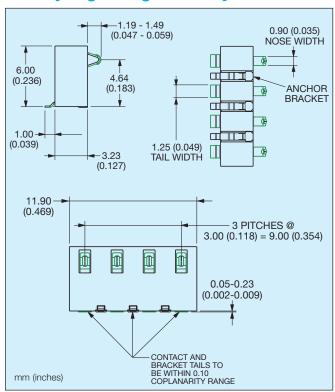

5 Way Right Angle Battery Connector

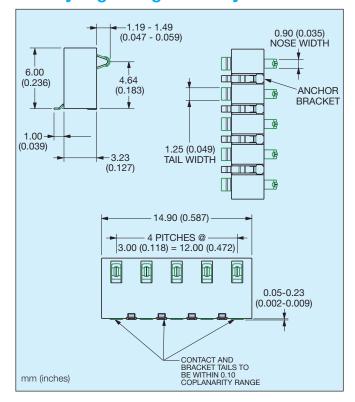





9155 MOBO® 3.0mm Pitch Right Angle Battery Connectors




2 Way Right Angle Battery Connector PCB Layout

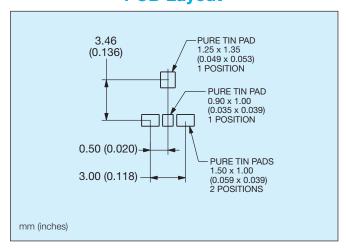


4 Way Right Angle Battery Connector PCB Layout

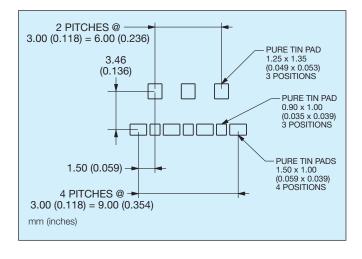

3 Way Right Angle Battery Connector PCB Lavout

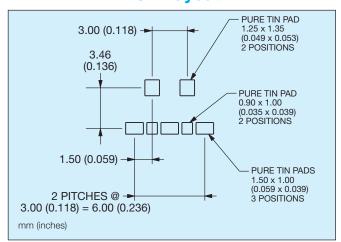

5 Way Right Angle Battery Connector PCB Layout

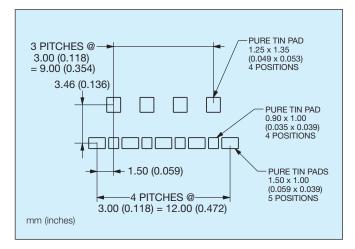

9155 MOBO® 2.5mm Pitch Right Angle Battery Connector





APPLICATIONS

- Mobile Phones
- Digital Music Players
- Any Handheld Devices

GENERAL DESCRIPTION

AVX extends the battery connector range with the addition of a low profile 2.5mm pitch right angle connector. This connector is offered in 2 to 5 positions and is rated at 3 amps. The connector's design is small and compact to minimize its profile yet functionally stable having a contact point at 2.20mm above the PCB.

The unique design of this stamped contact allows for a maximum insulator height of 4.0mm which makes it size compatible with more expensive pogo pin style battery connectors.


The complete family of battery connectors from AVX offer all of the same advantages; Beryllium Copper base material for enhanced contact performance, a full 3 amp current rating, selective gold plating for 5000 mating cycles and high temperature plastic for RoHS soldering.

KEY FEATURES AND BENEFITS

- · Reliable stamped contact with coined nose
- Full 1.5mm nose deflection for large operating range
- Two anchor tabs for mechanical stability
- 5000 cycle durability rating
- Minimized X, Y and Z package dimensions



HOW TO ORDER





Code No. of Ways

003 004 005

Vays Right Angle

]	Battery Connector				
1	Code	Description			
1	541	Right Angle 2.5mm			
1		Battery Connector			



Plating Option


Code Description				
	006	0.4µm Selective Gold, Pure Tin Tail		
	800	0.8µm Selective Gold, Pure Tin Tail		

9155 MOBO®

2.5mm Pitch Right Angle Battery Connector




2 Way Right Angle Battery Connector

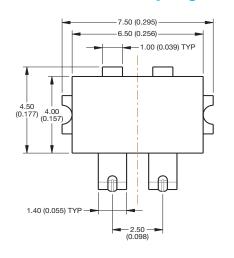





DEFLECTED CONNECTOR




UNDEFLECTED CONTACT



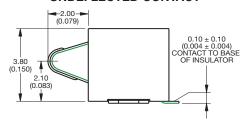


3 Way Right Angle Battery Connector

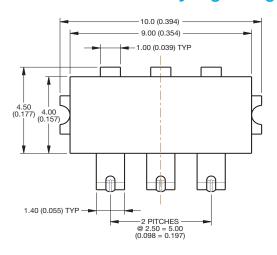





DEFLECTED CONNECTOR



UNDEFLECTED CONTACT









9155 MOBO® 2.5mm Pitch Right Angle Battery Connector




4 Way Right Angle Battery Connector

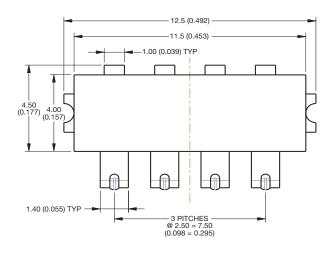




DEFLECTED CONNECTOR





UNDEFLECTED CONTACT




COPLANARITY 0.10 (0.004) Maximum

5 Way Right Angle Battery Connector

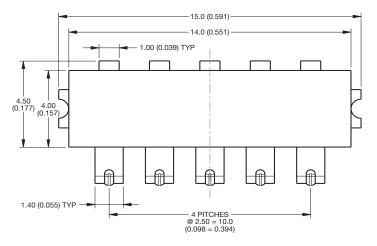





DEFLECTED CONNECTOR







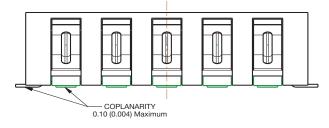





9155 MOBO® 2.5mm Pitch Right Angle Battery Connector




2 Way Right Angle Battery Connector PCB Layout

3 Way Right Angle Battery Connector PCB Layout

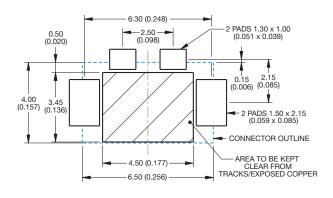


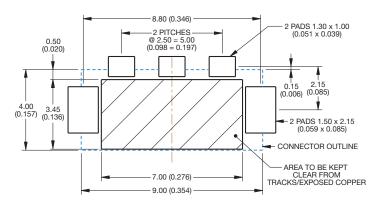

4 Way Right Angle Battery Connector PCB Layout

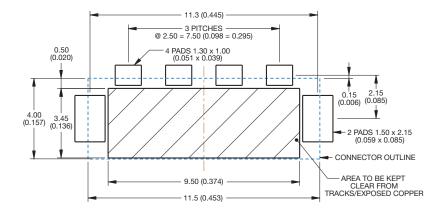

5 Way Right Angle Battery Connector PCB Layout

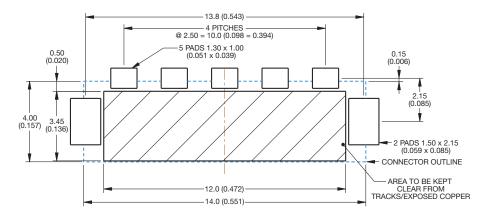



9162 Slide-In SIM Card Connector





GENERAL DESCRIPTION

The standard SIM connector is specifically designed for handheld devices requiring secure subscriber identification.

Following on from the introduction of our standard SIM block with an offering of 3 standard heights, 0.80mm, 1.60mm, or 2.40mm, AVX is now adding another standard to the 9162 series SIM connectors, the slide-in SIM.

Unlike SIM blocks which require SIM card guides to aid insertion, removal and retention of the SIM card, the slide-in SIM has guides as part of the connector mold design.

Contacts are stamped, gold plated, rated 0.5A, and 5000 mechanical cycles.

Our contact design is specifically rounded to avoid any possible damage during and after card insertion to the card itself, assuming normal use. The design also incorporates protection features to avoid contact damage during this operation such as contact snagging.


Please contact the appropriate sales office for further details of this service.

KEY FEATURES AND BENEFITS


- Produced for use with micro SIM cards.
- The insulator is molded from high temperature plastic enabling the connector to be used in convection or infrared soldering processes.
- Supplied on tape and reel packaging for pick and place assembly.
- The all plastic design, assuming normal use prevents damage to the SIM card on insertion.
- Optional SMT contact size: Standard SMT contact size – 1.60mm x 1.60mm Narrow SMT contact size – 1.05mm x 0.60mm
- RoHS Compliant available.



Standard SMT Contact Layout

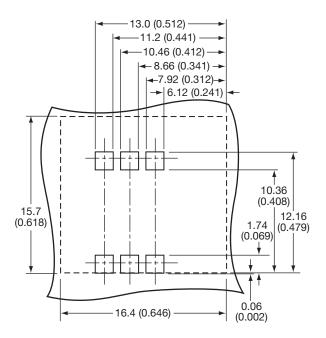

Narrow SMT Contact Layout

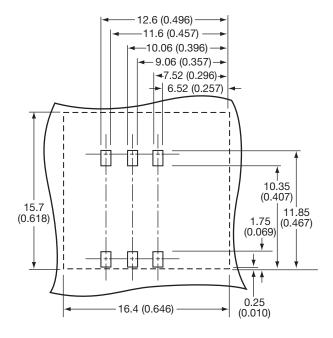




9162 Slide-In SIM Card Connector





Connector Height 1.75mm

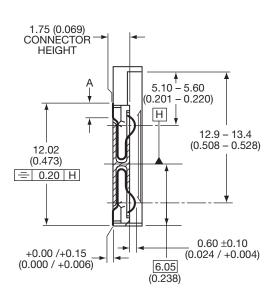

SECTION Z-Z


	Standard	Narrow
Α	1.46 (0.057)	1.05 (0.041)
В	1.60 (0.063)	0.60 (0.024)

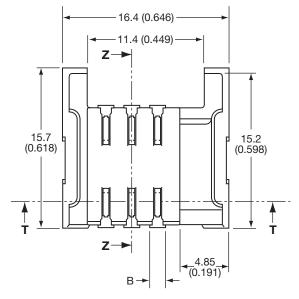



HOW TO ORDER








9162 SIM Card Block



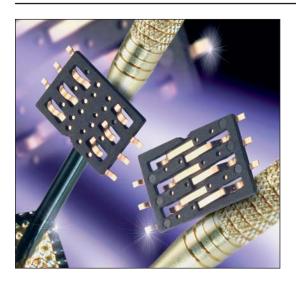

GENERAL DESCRIPTION

The standard SIM connector is specifically designed for handheld devices requiring secure subscriber identification.

The connectors are available in a standard 6 pin configuration on a 2.54mm pitch and at optional heights of 0.8mm, 1.6mm or 2.4mm.

Contacts are stamped, gold plated, rated at 0.5A, and 5000 mechanical cycles.

Our contact design is specifically rounded to avoid any possible damage during and after card insertion to the card itself, assuming normal use. The design also incorporates protection features to avoid contact damage during this operation such as contact snagging.

In addition to our offering presented here, other operating heights are available as custom alternatives.


Please contact the appropriate sales office for further details of this service.

KEY FEATURES AND BENEFITS


- Produced for use with both full ISO cards and micro SIM cards.
- Stand-off designs allow other components to be mounted underneath the connector offering greater effective use of PCB real estate.
- The insulator is molded from high temperature plastic enabling the connector to be used in convection or infrared soldering processes.
- Supplied on tape and reel packaging for pick and place assembly.
- RoHS Compliant.



0.8mm PCB Pad Layout

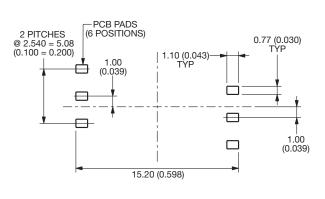


1.6mm / 2.4mm PCB Pad Layout

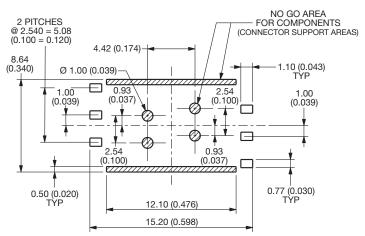


9162 SIM Card Block




Connector Height 0.8mm

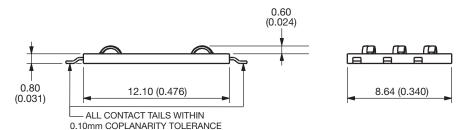

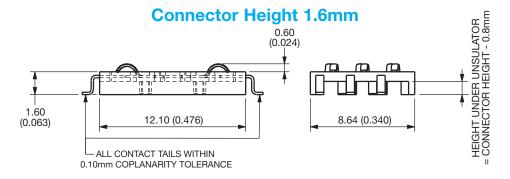

Connector Height 2.4mm

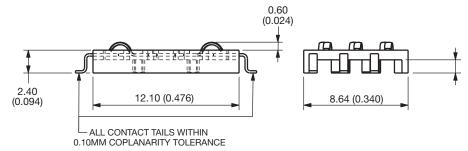


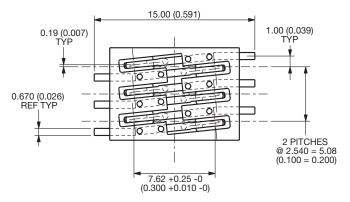


Illustration of Pin Configuration



HOW TO ORDER



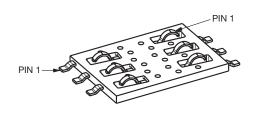



006 = Selective Gold, Pure Tin Tail



080 = 0.8mm stack height 160 = 1.6mm stack height 240 = 2.4mm stack height



9162 SIM Connector with Locking Latch





GENERAL DESCRIPTION

For 9162 Slide-IN & 9162 SIM/microSD


- Accepts GSM Standard 11.11 cards
- Secure locking latch mechanism
- Robust, good resistance against shock and vibration
- SIM Installed Height 1.50mm
- Polarized to eliminate improper insertion of the card

KEY FEATURES AND BENEFITS

- SMT with locking hinged guide
- 2.50mm connector height
- · Selective gold on mating surface/tin on solder tails
- Tape and reel packaging


















Height of SIM Card: 1.50 (0.059)

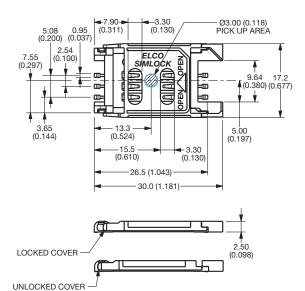

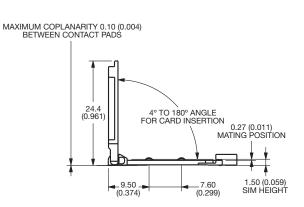


Suggested PCB Layout

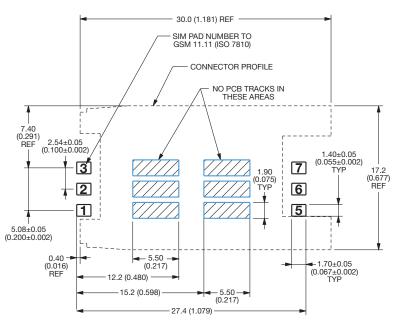



9162 Slide-In Low Profile SIM Connector



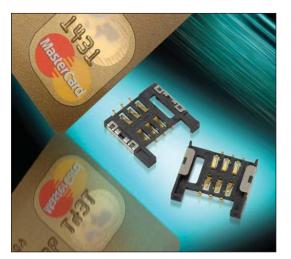

GENERAL DESCRIPTION


- Six position Slide-In SIM
- Low Profile 0.70mm to SIM base
- Side bracket to add solder security
- SIM guidance using the side walls


KEY FEATURES AND BENEFITS


- SMT Slide-In SIM
- Molded in high temperature LCP
- 0.38µm Gold on contact surface and gold flash on contact tails
- 1.60mm connector height
- Tape & Reel packaging




HOW TO ORDER

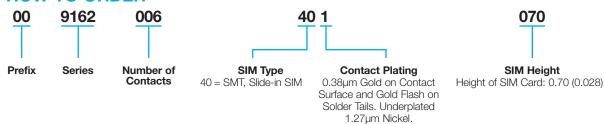

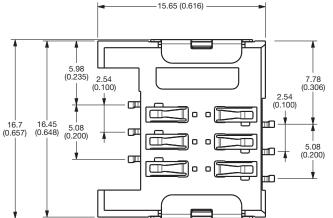

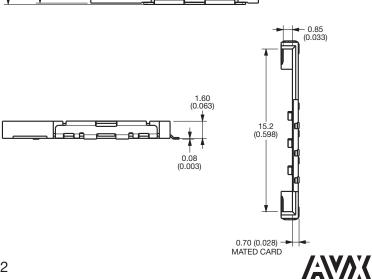

Suggested PCB Layout

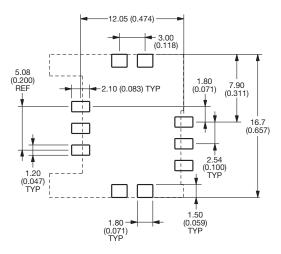

9162 SIM/microSD Micro Combination Connector





GENERAL DESCRIPTION


- Six position slide-in SIM connector & Push-Push microSD connector
- Allows two cards to be inserted into the same connector
- Card detect switch on the microSD


KEY FEATURES AND BENEFITS


- Space saving connector combination
- Integrates 2 connectors into 1
- Contact Plating: Gold
- Insulator molded from LCP UL94 V-O
- Low profile 1.50mm to SIM
- 2.70mm connector height



HOW TO ORDER

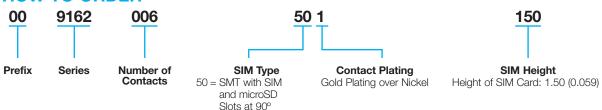

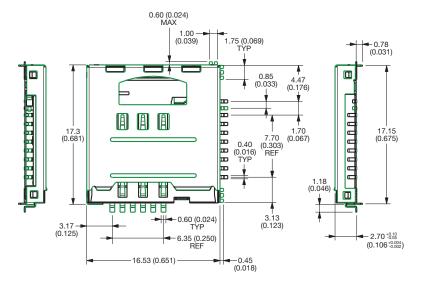


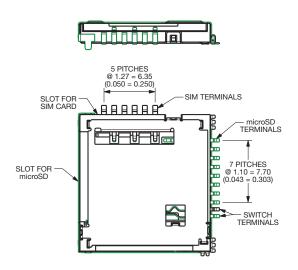


9162 SIM/microSD Micro Combination Connector




Connector on PCB




Recommended PCB Layout

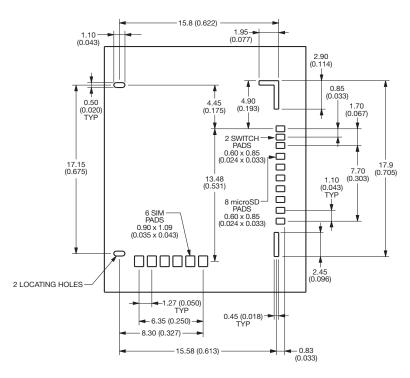

PCB SPACE USED BY CONNECTOR CARDS FULLY INSERTED




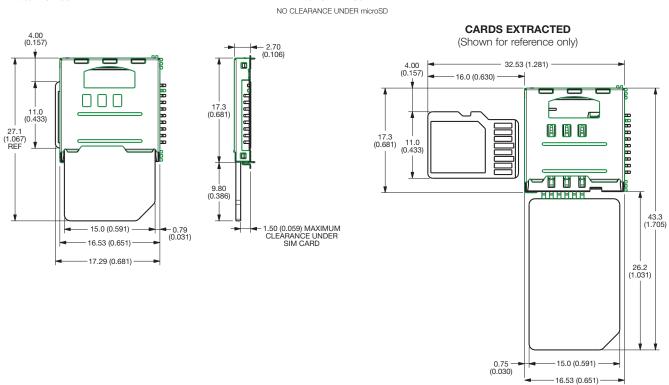



9158 SOLO STACKER



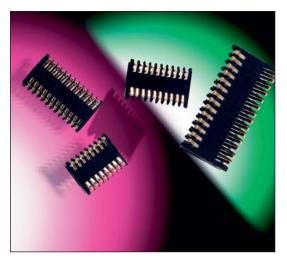

GENERAL DESCRIPTION

The MOBO® series 9158 is a one-piece connector used to connect two PCBs within mobile phones, pagers, PDAs, security, handheld scanners, etc. in a cost-effective manner.

A standard range is available with 16, 20, 24 and 28 contacts to suit stack heights of 1.90mm to 3.30mm. Other contact variants are also available up to 5.10mm, in custom housings. The SOLO STACKER can allow a spacing tolerance of up to ± 0.30 mm and still provide reliable connections between the PCBs, even if they are not parallel.

SOLO STACKER is designed for PCB surface mounting and is supplied in tape and reel packaging. Gold plated pads on the mating PCB or suitable flex circuits provide connection between the boards.

Whatever your requirements this SOLO STACKER can also be customized to suit your applications.

APPLICATIONS

Suitable applications include:

- Mobile Phones
- PDA
- Medical
- PMR
- Industrial
- Security
- Handheld Scanner


KEY FEATURES AND BENEFITS


Single piece Connector – no mating half connector required to connect two boards together which means:


- · Reduced assembly time.
- Only one part to purchase and stock.
- Due to the unique contact design, the mating device does not have to be parallel.
- Extremely robust when subjected to shock and vibration.
- · Cost effective.
- Helps reduce tolerance accumulation within system.




DRAWINGS AND DIMENSIONS

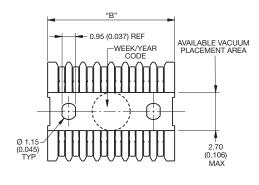





FOR VERSION STACK HEIGHT 030



Number of Positions	Part Number	Α	В
16	00-9158-016-XXX-XXX	7	9.00
20	00-9158-020-XXX-XXX	9	11.00
24	00-9158-024-XXX-XXX	11	13.00
28	00-9158-028-XXX-XXX	13	15.00

A = Number of contact pitches at 1mm


B = Connector Length




9158 SOLO STACKER



SMT PCB Footprint



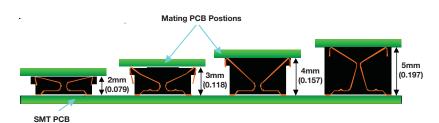


Mating		Standa	ard Pos	itions			S	pecial I	Positio	ns
Height	16	20	24	28	32	4	18	30	34	40
2mm	Х	Х	Х	Х					Х	
3mm	Х	Х	Х	Х	Х					
4mm						Х	Х			Х
5mm								Х		

Other sizes available on request.

Mating PCB Footprint for version stack height 020 & 030


CONTACT PITCH 1.0 (0.039)

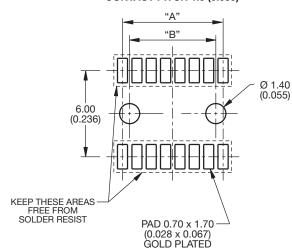

^{*} Used for Boss versions only.


Mating PCB Footprint for version stack height 025

CONTACT PITCH 1.0 (0.039)

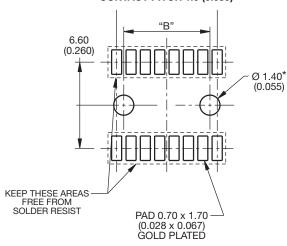

В	Dim
16	6.00 (0.236)
20	8.00 (0.315)
24	10.00 (0.394)
28	12.00 (0.472)

HOW TO ORDER



XXX No of

No of Ways 16 = 016 20 = 020 24 = 024 28 = 028



Stack Height020 = 1.9mm to 2.1mm
025 = 2.1mm to 2.7mm
030 = 2.8mm to 3.3mm



Plating Variation
06 = Selective Gold
0.25µm
Gold Plated
Contact Nose,
Pure Tin Tail



PCB Location Bosses

1 = With PCB Location Bosses 2 = Without PCB Location Bosses







GENERAL DESCRIPTION

The SOLO series 9188 is a one-piece connector used to connect two PCBs in a cost effective manner.

A standard range is available with 4, 6, 8 staggered contacts to suit stack heights of 1.1mm to 2.1mm (see table below).

SOLO Stacker is designed for PCB surface mounting and is supplied in tape and reel packaging. Gold plated pads on the mating PCB or suitable flex circuits provide connection between the two boards.

APPLICATIONS

Suitable applications include:

- · Handheld Devices:
 - Phones
 - Scanners
 - Radios
 - Medical Diagnostic
 - Security Devices

KEY FEATURES AND BENEFITS

Single piece connector - no mating half required to connect two boards together which means:

- · Reduced assembly time
- Only one part to purchase and stock
- Due to the unique contact design, the mating device does not have to be parallel
- Helps reduce tolerance accumulation within system



HOW TO ORDER







No. of Ways	
Code	No. of Ways
004	4
006	6
800	8



012


Stack Height Code Height No. of Ways 1.1mm to 1.3mm 4 only 1.9mm to 2.1mm 6 & 8 only










4 Way Staggered Stacker



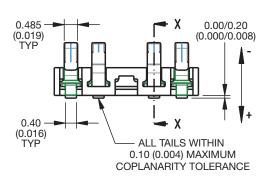





MATING CONDITION




SECTION ON X - X



SMT PCB FOOTPRINT

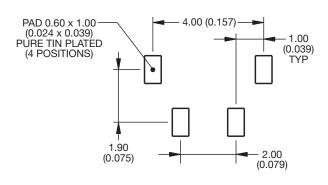


MATING PCB FOOTPRINT

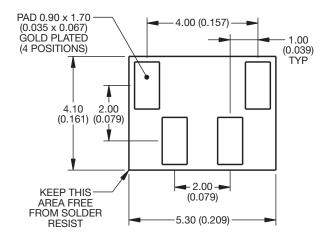








6 Way Staggered Stacker

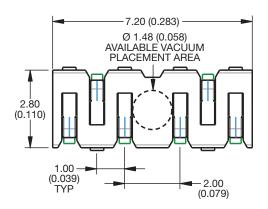

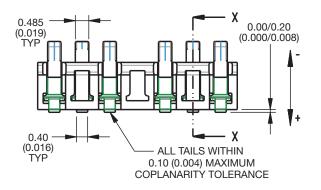





MATING CONDITION




SECTION ON X - X



SMT PCB FOOTPRINT

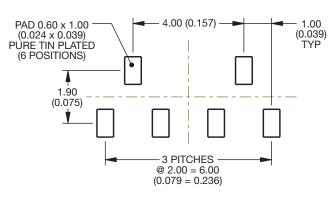



MATING PCB FOOTPRINT

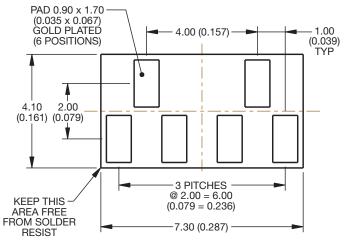




8 Way Staggered Stacker

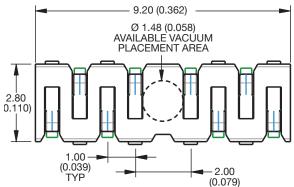


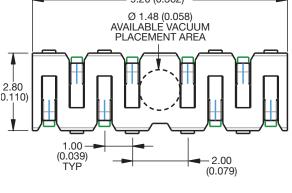



MATING CONDITION




SECTION ON X - X

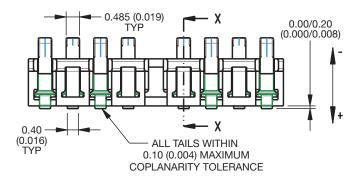




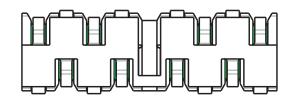

SMT PCB FOOTPRINT

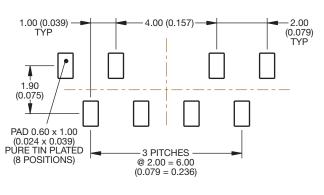

MATING PCB FOOTPRINT

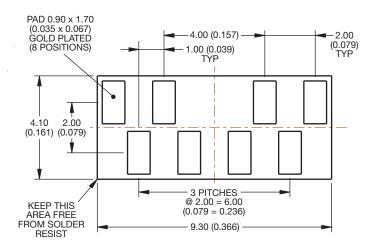



9258 Ultra Low Profile Stacker





GENERAL DESCRIPTION

The SOLO series 9258 is a one-piece connector used to connect two PCBs in a cost effective manner.

This connector is a 1.0mm pitch available in an 8 position with stack heights of 0.40mm and 0.80mm. It is available with or without location bosses.

This connector is designed for PCB surface mounting and is supplied in tape and reel packaging. Gold plated pads on the mating PCB or suitable flex circuits provide connection between the boards.

APPLICATIONS

Suitable applications include:

- Mobile phones
- Handheld scanners
- · Portable medical devices
- · Display interface

KEY FEATURES AND BENEFITS

Single piece connector – no mating half connector required to connect two boards together which means:

- Reduced assembly time
- Only one part to purchase and stock
- Due to the unique contact design, the mating device does not have to be parallel
- Extremely robust when it comes to shock and vibration



HOW TO ORDER











Plating Variation 004 = 0.40mm 06 = Selective Gold 008 = 0.80mm 0.25µm Gold Plated Contact Nose, Pure Tin Tail

06



- **PCB Location Bosses** 1 = With Mating PCB Location Bosses (top side)
- 2 = Without PCB Location Bosses
- 3 = With SMT PCB Location Bosses (bottom side)

X

4 = With SMT and Mating PCB Location Bosses (top and bottom sides)





9258 Ultra Low Profile Stacker





0.4mm Ultra Low Profile Stacker


0.8mm Ultra Low Profile Stacker

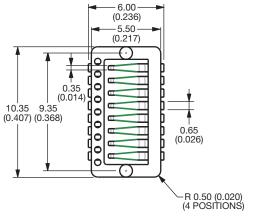




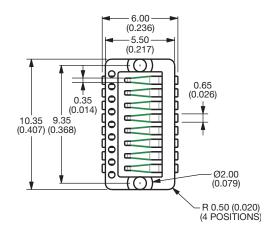




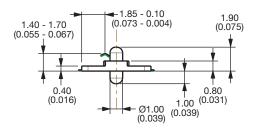


PROPOSED SMT PCB LAYOUT ALL PADS PURE TIN PLATE

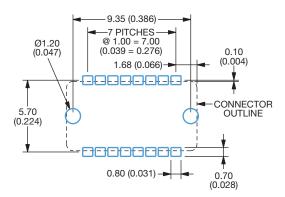







WITHOUT PCB LOCATION BOSSES




WITH SMT PCB LOCATION BOSSES (BOTTOM SIDE)



WITH PCB AND SMT LOCATION BOSSES



PROPOSED MATING PCB LAYOUT ALL PADS GOLD PLATE

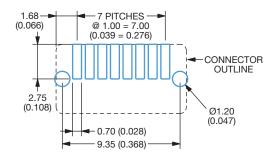



9157 I/O Connector





GENERAL DESCRIPTION

The 9157 series was specifically designed for portable equipment.

AVX now offers this two-part system as a standard product. The fixed SMT socket is designed to be housed within the confined dimensional constraints of the portable device.

The plug/cover connector has sprung contacts and is designed for termination to accessory equipment. The connector is designed to house fifteen signal contacts on a 1mm pitch rated at 1.5A. There is the option to include a switching RF coax.

A cradle SMT plug connector for docking applications is also available as standard and has the option of including a SMT RF coax.

Whatever your requirements, the 9157 series can also be customized to suit your application.

APPLICATIONS

Suitable applications include:

- Mobile Phones
- PDA
- Medical
- Docking/Charging for any portable device

KEY FEATURES AND BENEFITS

- Patented 20° angled face on the socket gives self-cleaning face when mated with plug.
- Metal Latching area integral to socket which saves PCB real estate.
- \bullet Integral to socket is a mechanical 50Ω switching coax for SMT termination.
- Single sprung plug contact design gives ten thousand mating cycles and cleaning/wiping action.
- Customer has option to terminate own RF coax using AVX custom tooling: 06-9157-7116-01-000.
- SMT plug has unique location pyramids that give positive alignment to portable device, and assist blind mating.
- RoHS Compliant.




RoHS


9157 I/O Connector




Plug Wire with Coax

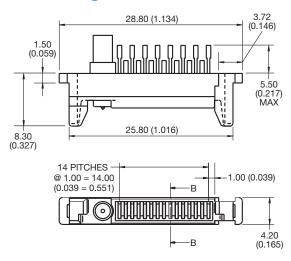


SMT Plug with Coax

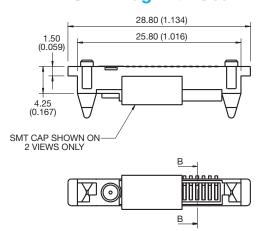

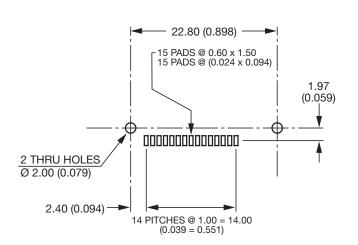



SUGGESTED PCB LAYOUT

Plug Wire without Coax

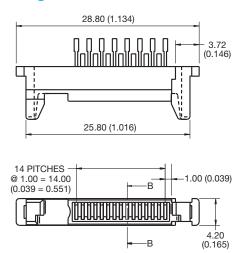

SMT Plug without Coax

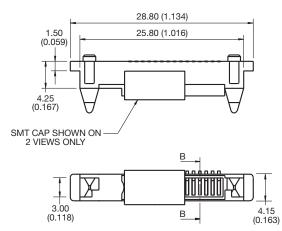

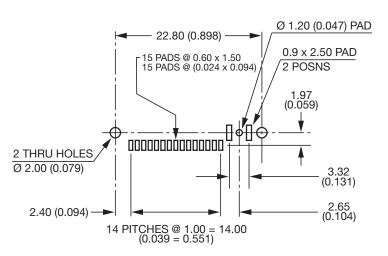


SUGGESTED PCB LAYOUT




9157 I/O Connector




SMT Socket with Coax

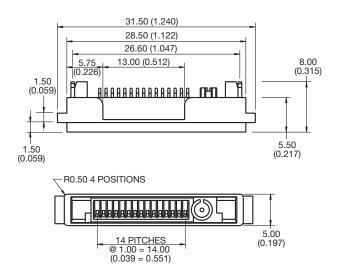


SMT Socket without Coax

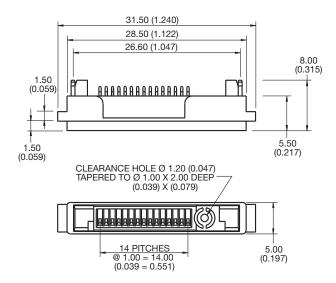

SMT PAD LAYOUT

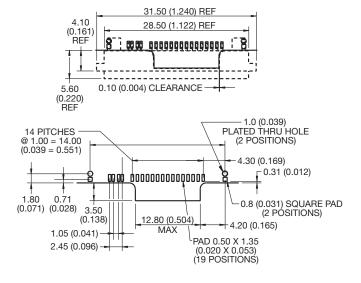


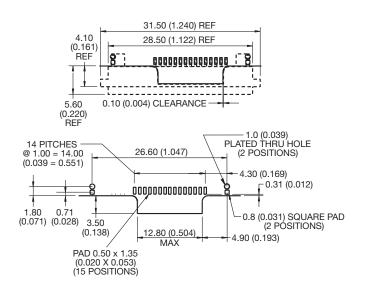


9157 I/O Connector



Cover Kit

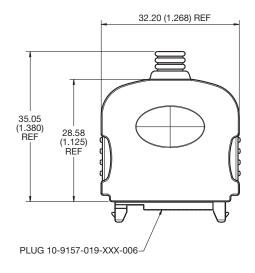




HOW TO ORDER

Plug Options - Example



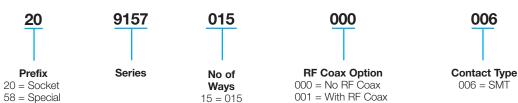

Cover Options – Example * Parts supplied in kit form



Patent: 2276285 5540599

Note: Application tooling to terminate coax cable 06-9157-7116-01-000.



9157 MOBO® 19 Way I/O Connector





GENERAL DESCRIPTION

Based on our standard 15 way 9157 I/O family, AVX has now released a family 19 way devices. This range includes a SMT 90 degree plug, a wire socket version that is used with the standard 9157 cover and a SMT socket for charging applications.

Options with the 90 degree SMT socket include the sealing of the connector contacts and the connector to the housing up to IP67. There is also an option to have an EMLB (early mate, late break) on pins 1 and 19.


To achieve the seal to the device housing, it may be necessary to customize the device housing design.


On the SMT 90 degree version, we also have the capability of an integrated DC jack, enabling both the DC jack and the 19 way cover to be plugged in at the same time.

AVAILABLE DEVICES:

10 9157 019 000 006 10 9157 019 000 007 20 9157 019 000 006 30 9157 97 XX 00 000 Plug wire version SMT charging version 90 degree SMT socket Cover options see page 36

Cover Kit

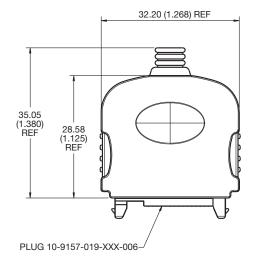





9157 MOBO® 19 Way I/O Connector




Plug Wire




SMT Plug

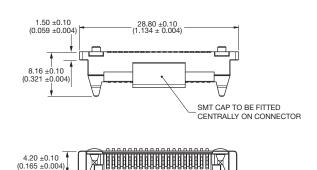


SMT Socket

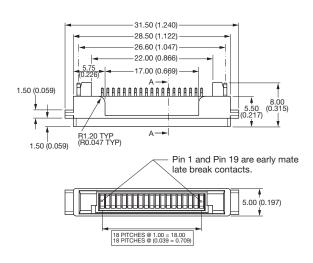

SMT Plug (Suggested PCB Layout)

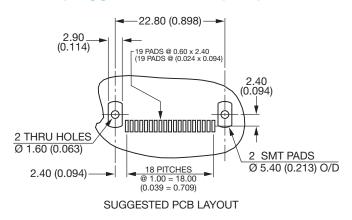

SMT Socket (Suggested PCB Layout)

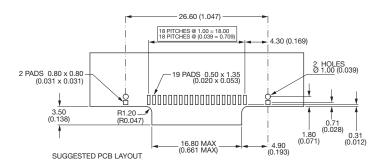



9257 Reduced Size I/O Connector





GENERAL DESCRIPTION

An I/O interconnect system designed for portable equipment.

AVX offers this plug and socket reduced size system as a standard product. The fixed SMT socket is designed to be mounted on a PCB and housed within a portable device. The plug is designed for cable termination with options of single and double sided contacts and customizing the overmold cover or parts can be supplied as connector only for sub contract termination. The socket connector houses 16 contacts in two rows on 1.25mm pitch with a rating of 1 amp per contact. Both connectors are RoHS compliant.

APPLICATIONS

Suitable applications include:

- Cellular Phones
- Handheld Devices
- Industrial Modules
- Medical Electronics

KEY FEATURES AND BENEFITS

- No latching is required due to the click design of the contacts.
- Optional customization of the overmold cover.
- Options of single row (8 way) or dual row (16 way) plug connector.
- Compact size to optimize PCB real estate.
- Metal outer cover provides integrated PCB location and solder tab.
- Positive alignment and orientation of the plug and socket.
- 5K mating cycles and 1 amp rated.





9257 Reduced Size I/O Connector



Single Sided 8 Way I/O Plug Connector


Dual Sided 16 Way I/O Plug Connector

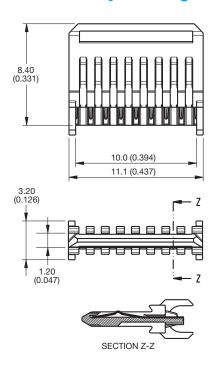

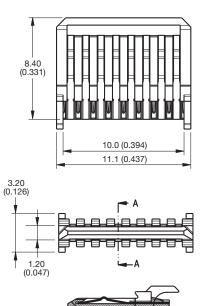


SECTION A-A

Suggested Overmolding for Plug Connector

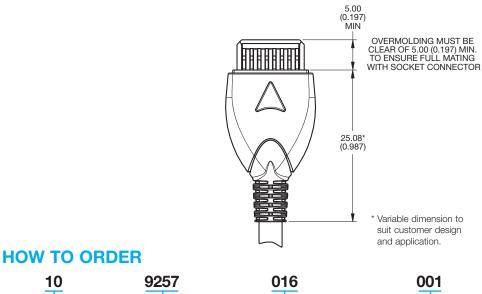









Notes:


- 1. All dimensions are for reference only unless toleranced.
- 2. For full product specification refer to AVX spec 201-01-089.
- 3. Parts packed in tube with 50 parts per tube.




9257 Reduced Size I/O Connector




16 Position I/O Socket

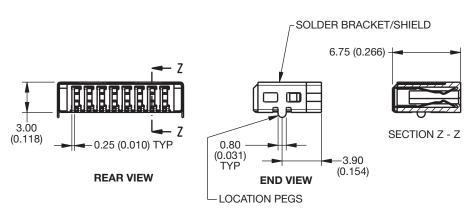



PCB Layout

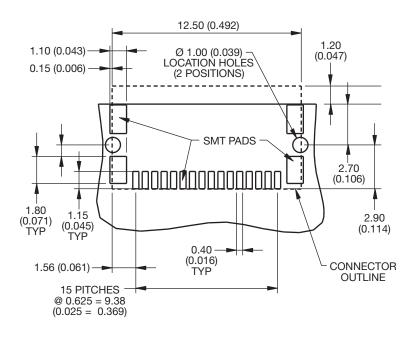

HOW TO ORDER



Packing Details		
Reel Qty.	1100	
Pack Qty.	5500	


Notes:

- 1. 16 Way I/O Socket.
- 2. For full product specification refer to AVX spec 201-01-089.
- 3. General tolerance ± 0.20 (0.008) unless otherwise stated.
- 4. SMT feet within 0.13 (0.005) coplanarity.







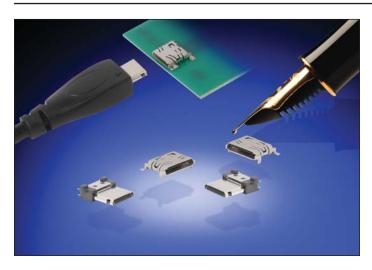

GENERAL DESCRIPTION

AVX offers the 12 way mini I/O connector as a standard product. The fixed SMT socket is designed to be mounted on a PCB and housed within a portable device. The plug is designed for cable termination with options of single and double sided contacts. Parts can be supplied as connectors only for sub contract termination, or with a custom overmold cover. The socket connector houses 12 contacts in a single row on 0.50mm pitch.

APPLICATIONS


- Medical Electronics
- Cellular Phones
- Industrial Modules
- Hand Held Devices


KEY FEATURES AND BENEFITS

- No latching required due to the click design of the contacts.
- Optional customization of the overmold cover.
- Compact size to optimize PCB real estate.
- Metal outer cover provides integrated PCB location and solder tab.
- Positive alignment and orientation of the plug and socket.



9257 STANDARD 12 WAY MINI I/O PLUG

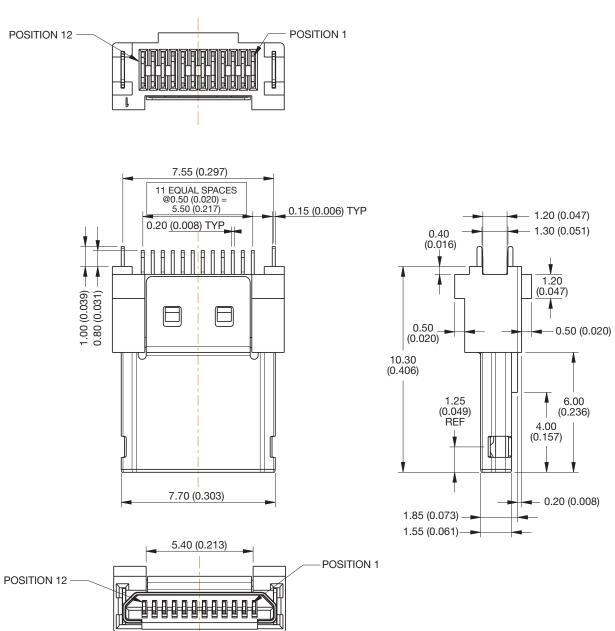


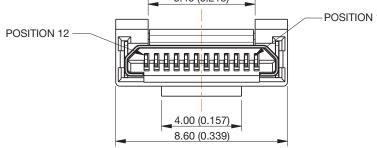


HOW TO ORDER 10 9257 006 012 101 **Prefix** Contacts **Plating Option Series** No of $006 = 0.25 \mu m \text{ Gold}$ 10 = Plug Connector Ways 101 = Solder Tail over Nickel 12 = 012



SUGGESTED OVERMOLDING FOR PLUG CONNECTOR

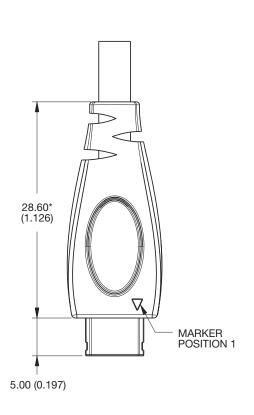

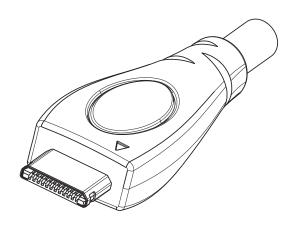







DIMENSION MARKED WITH A * ARE VARIABLE DIMENSION TO SUIT CUSTOMER DESIGN AND APPLICATION








9257 STANDARD 12 WAY MINI I/O SOCKET



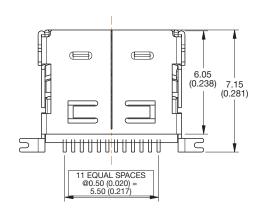

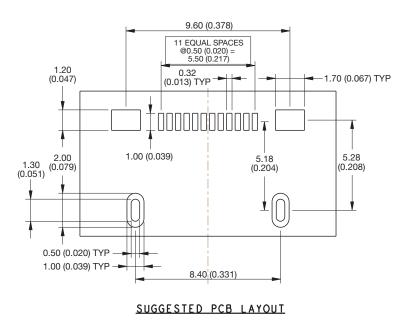

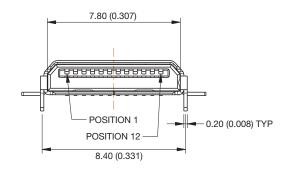

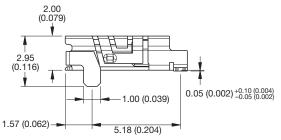

HOW TO ORDER



Wire to Board IDC Connector





The 9175 series from AVX offers customers the ability of connecting individual wires to a single row of contacts using IDC technology.

Available as a 2 or 3 pin connector it is both low profile and has a small PCB footprint. The connector is SMT assembled to the PCB prior to assembly of the wire.

Using a small application tool, the wires are then inserted into the contact slot. This process cuts the insulation and enables the individual conductors of the wire to form a homogeneous joint. The shape of the molding also forms a restraint to the wire when fully inserted in the contact. These connectors are supplied in tape and reel for easy pick and place. The wire options are 28 or 26 AWG solid or stranded wire.

APPLICATIONS

- PCB to PCB individual wire interconnect
- · High volume and high speed assembly
- Device to PCB interconnect (coils, sensors, etc.)

FEATURES AND BENEFITS

- Small single row IDC
- Rated at 1 amp

26 Gauge Solid or Stranded

- Uses both stranded and solid wire (26 or 28 AWG)
- Insulators are end to end stackable for higher pin counts
- Uses simple hand tool for higher volume applications





Max Ø 1.00








Wire to Board IDC Connector



2 WAY IDC CONNECTOR

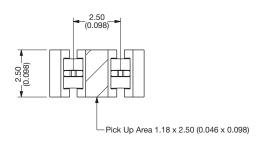








SMT PCB LAYOUT

PURE TIN PADS

3 WAY IDC CONNECTOR

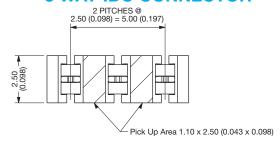


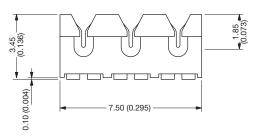





SMT PCB LAYOUT

PURE TIN PADS

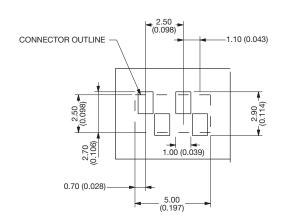

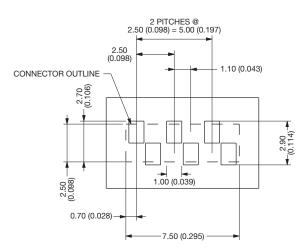

HAND INSERTION TOOLING



UNIVERSAL HANDLE

Details	Tool Part Number	
6.35 A/F HEX BIT HOLDER	06 7000 7730 01 000	



HIGH PRODUCTION Metal

Max Insulation Dia	Tool Part Number
Ø 1.00	06 9175 7017 01 000



MED PRODUCTION Metal/Plastic

Max Insulation Dia	Tool Part Number
Ø 1.00	06 9175 7016 01 000






LOW PRODUCTION Plastic

Max Insulation Dia	Tool Part Number
Ø 1.00	06 9175 7004 01 000





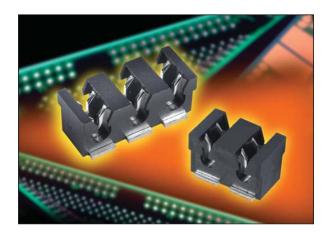

The 9176 series from AVX offers customers the ability of connecting individual wires to a single row of contacts using IDC technology.

Available as a 2 or 3 pin connector it is both low profile and has a small PCB footprint. The connector is SMT assembled to the PCB prior to assembly of the wire.

Using a small application tool, the wires are then inserted into the contact slot. This process cuts the insulation and enables the individual conductors of the wire to form a homogeneous joint. The shape of the molding also forms a restraint to the wire when fully inserted in the contact. These connectors are supplied in tape and reel for easy pick and place. The wire options are 18 to 24 AWG stranded wire.


APPLICATIONS

- PCB to PCB individual wire interconnect
- Device to PCB interconnect (LED Modules and LED Strips)

HOW TO ORDER 00 9176 002 Prefix Series Number of Ways 002 = 2 003 = 3

FEATURES AND BENEFITS

- Small single row IDC
- Rated at 10 amps
- Uses both stranded wire (18 to 24 gauge)
- Insulators are end to end stackable for higher pin counts
- Uses simple hand tool for higher volume applications



001








Wire to Board Strip IDC Connector





2 WAY IDC CONNECTOR

PICK UP AREA 1.90 x 5.00 min. (0.075 x 0.197) 5.00 (0.197)


3 WAY IDC CONNECTOR

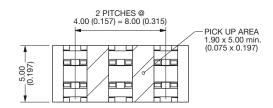

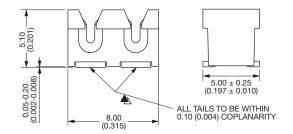


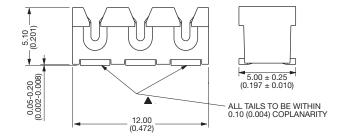


SMT PCB LAYOUT

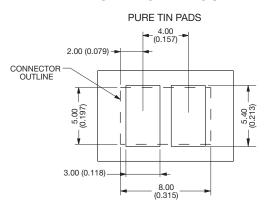

SMT PCB LAYOUT

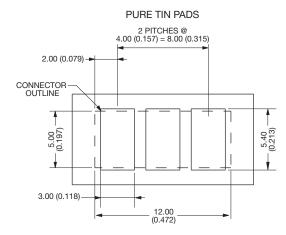


HAND INSERTION TOOLING




UNIVERSAL HANDLE

Details	Tool Part Number
6.35 A/F HEX BIT HOLDER	06 7000 7730 01 000



HIGH PRODUCTION Metal

Max Insulation Dia	Tool Part Number
Ø 2.10	06 9176 7017 01 000
Ø 1.60	06 9176 7017 02 000




MED PRODUCTION Metal/Plastic

Max Insulation Dia	Tool Part Number
Ø 2.10	06 9176 7016 01 000
Ø 1.60	06 9176 7016 02 000



Wire to Board IDC Connector



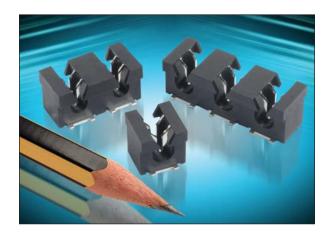

The 9177 Series from AVX offers customers the ability of connecting individual wires to a single row of contact using IDC technology.

Available as a single contact version or 2 and 3 way offers the user flexibility of placement on the PCB for single or multiple wires.

Application tooling for the 9177 comes in the form of flat rock plates for each of the sizes. The wires are inserted into the slots by the application tools cutting through the insulation and exposing the inner cores, which then form a homogenous joint with the

The molding is shaped to form a restraint to the wire insulation therefore adding to the strength of the joint. Supplied in tape and reel for easy pick and place. Suitable wire options are stranded wire between 14 and 20 AWG.

For wire diameters you do not see listed please consult the factory for recommendations.


APPLICATIONS

- Termination of any individual wires within the specified wire range to a PCB
- High power termination to 15 amps
- Voltage critical areas up to 650V

FEATURES AND BENEFITS

- Eliminates the need for hand soldering
- Connectors are end to end stackable for larger pin counts
- Uses stranded wire with no preparation
- Integrated cable restraint within the molding
- Offers a fit and forget termination by using IDC
- Tooling allows mass termination of each connector size

HOW TO ORDER



003



18 AWG

20 AWG

001


012

033

Wire Insulation/Gauge Size Code Accepted Wire Gauge Wire Insulation 14 AWG ø4.25 max 16 AWG ø3.50 max

ø3.50 max

ø2.75 max









Wire to Board IDC Connector




1 WAY IDC CONNECTOR



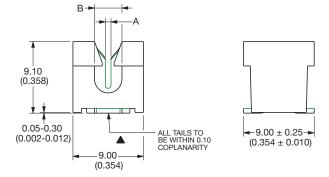


SMT PCB LAYOUT

2 WAY IDC CONNECTOR

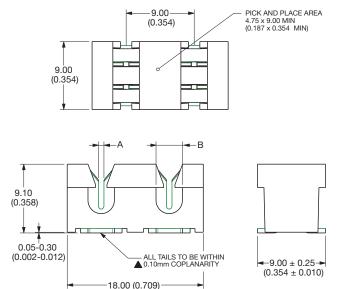


SMT PCB LAYOUT

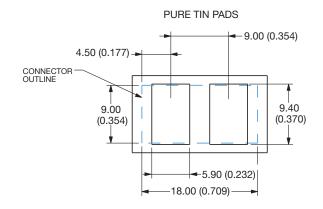



Wire to Board IDC Connector



3 WAY IDC CONNECTOR

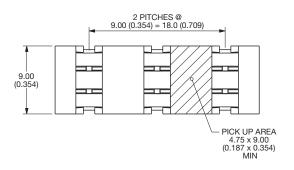


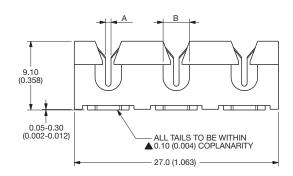




SMT PCB LAYOUT

PURE TIN PADS

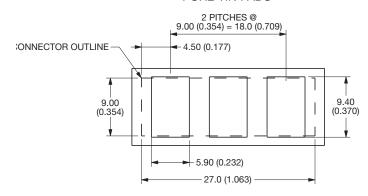


HAND INSERTION TOOLING





2 WAY



3 WAY

HIGH PRODUCTION

METAL

No. of Ways	Max Insulation Dia.	Tool Part Number
	Ø 4.25	06 9177 7017 01 001
1	Ø 3.50	06 9177 7017 02 001
	Ø 2.75	06 9177 7017 03 001
	Ø 4.25	06 9177 7017 01 002
2	Ø 3.50	06 9177 7017 02 002
	Ø 2.75	06 9177 7017 03 002
	Ø 4.25	06 9177 7017 01 003
3	Ø 3.50	06 9177 7017 02 003
	Ø 2.75	06 9177 7017 03 003

MED PRODUCTION

PLASTIC

	No. of Ways	Max Insulation Dia.	Tool Part Number
	1	Ø 4.25	06 9177 7016 01 001
		Ø 3.50	06 9177 7016 02 001
		Ø 2.75	06 9177 7016 03 001
	2	Ø 4.25	06 9177 7016 01 002
		Ø 3.50	06 9177 7016 02 002
		Ø 2.75	06 9177 7016 03 002
		Ø 4.25	06 9177 7016 01 003
	3	Ø 3.50	06 9177 7016 02 003
		Ø 2.75	06 9177 7016 03 003



AMERICAS

AVX Myrtle Beach, SC Tel: 843-448-9411

AVX Northwest, WA Tel: 360-699-8746

AVX Midwest, IN Tel: 317-861-9184

AVX Mid/Pacific, CA Tel: 408-988-4900

AVX Northeast, MA Tel: 617-479-0345

AVX Southwest, CA Tel: 949-859-9509

AVX Canada Tel: 905-238-3151

AVX South America Tel: +55-11-4688-1960

EUROPE

AVX Limited, England Tel: +44-1252-770000

AVX S.A.S., France Tel: +33-1-69-18-46-00

AVX GmbH, Germany Tel: +49-8131-9004-0

AVX SRL, Italy Tel: +39-02-614-571

AVX Czech Republic Tel: +420-57-57-57-521

AVX/ELCO UK Tel: +44-1638-675000

ELCO Europe GmbH Tel: +49-2741-299-0

AVX S.A., Spain Tel: +34-91-63-97-197

AVX Benelux Tel: +31-187-489-337

ASIA-PACIFIC

AVX/Kyocera (S) Pte Ltd., **Singapore**

Tel: +65-6286-7555

AVX/Kyocera, Asia, Ltd., **Hong Kong**

Tel: +852-2363-3303

AVX/Kyocera Yuhan Hoesa, South Korea

Tel: +82-2785-6504

AVX/Kyocera HK Ltd., **Taiwan**

Tel: +886-2-2698-8778

AVX/Kyocera (M) Sdn Bhd, Malaysia

Tel: +60-4228-1190

AVX/Kyocera International Trading Co. Ltd., Shanghai

Tel: +86-21-6215-5588

AVX/Kyocera Asia Ltd., Shenzen

Tel: +86-755-3336-0615

AVX/Kyocera International Trading Co. Ltd., **Beijing**

Tel: +86-10-6588-3528

AVX/Kyocera India **Liaison Office**

Tel: +91-80-6450-0715

ASIA-KED

(KYOCERA Electronic Devices)

KED Hong Kong Ltd. Tel: +852-2305-1080/1223

KED Hong Kong Ltd. Shenzen

Tel: +86-755-3398-9600

KED Company Ltd. Shanghai

Tel: +86-21-6217-1201

KED Hong Kong Ltd. Beijing

Tel: +86-10-5869-4655

KED Taiwan Ltd. Tel: +886-2-2950-0268

KED Korea Yuhan Hoesa, South Korea

Tel: +82-2-783-3604/6126

KED (S) Pte Ltd. Singapore

Tel: +65-6509-0328

Kyocera Corporation Japan

Tel: +81-75-604-3449

Contact:

