Art.-Number: 701130

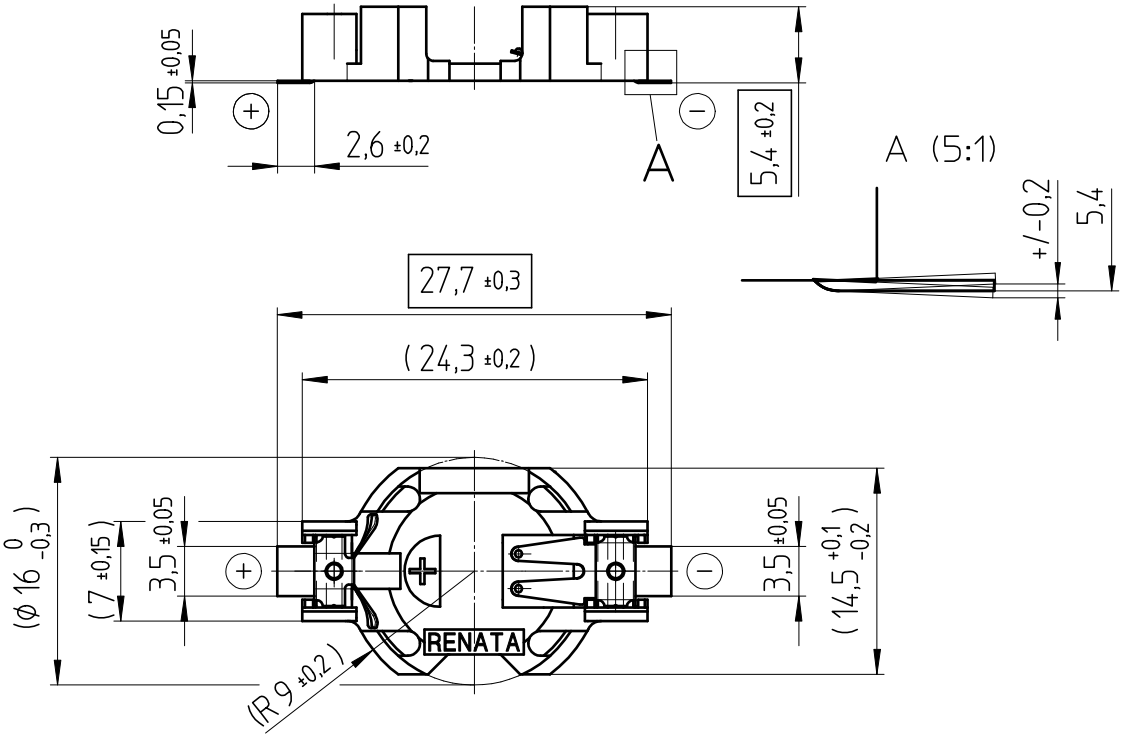

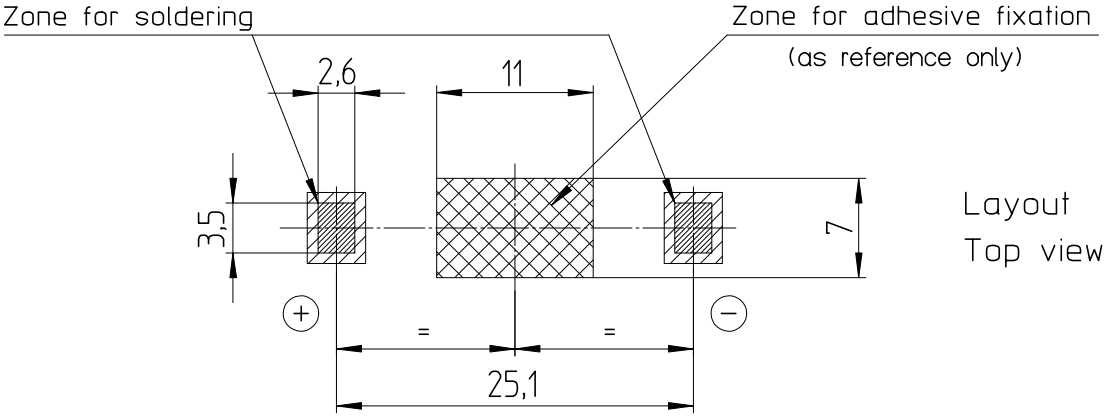

Layout
Top view

- Samples can deviate in the execution from the serie.

- Dimensions and tolerances can be specified only after the testing of the devices for the mass production definitely

Holder material : heat resistant, glass-fiber reinforced LCP
Battery contacts : spring stainless steel 301 nickel plated, thickness 10µm
Solder contacts : spring stainless steel 301 solder plated throughout 100% Sn, thickness 10µm

All framed values will be used for dimension checking !

Rev.	①	07.09.07	MCi	Rev.	○		
Rev.	②	24.10.07	SRi	Rev.	○		
Rev.	○			Rev.	○		

Customer's Approval		
Date		
Signature		

Titel:

SMTU1632-LF

Scale			
2:1	Drawn	06.04.05	SRi
	Checked	24.10.07	BBö
	Approved	25.10.07	MHo

renata batteries

CH-4452 Itingen
Switzerland

3.8811.4-2

Downloaded from Elcodis.com electronic components distributor