


Inside View

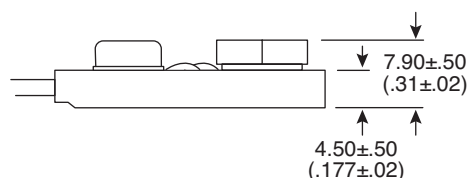

Side View

Dimensions: mm (In.)

SPECIFICATIONS	
Housing:	Molded ABS Plastic
Wire:	Stripped and Tinned, 26 AWG
Operating Temperature:	32°F ~ 176°F
Snaps:	Nickel Plated Brass, 6 Prong
Conductor:	Tin Overcoated Copper
Ring Terminals:	Copper
Life Cycle:	400 Insertions
Contacts:	6 Prong
RoHS Compliant	

MOUSER STOCK NO.	L
123-5004-GR	4"
123-5006-GR	6"
123-5008-GR	8"

Available from Mouser Electronics
1-800-346-6873
www.mouser.com

EPD-200510

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.