


RECOMMENDED  
CABLE STRIPPING DIM'S

REV.	DATE	ECR NO.	DESCRIPTION
A	12/29/00	XXXXXX	MODIFY PLATING TO SILVER
B	12/27/05	XXXXXX	MODIFY PLATING TO NEXCOTE, UPDATE DRAWING FORMAT
C	07/27/08	XXXXXX	REVISE MATING FACE TO 32 HEX NUT
D	06/24/09	XXXXXX	PLATINGS WERE CHANGED

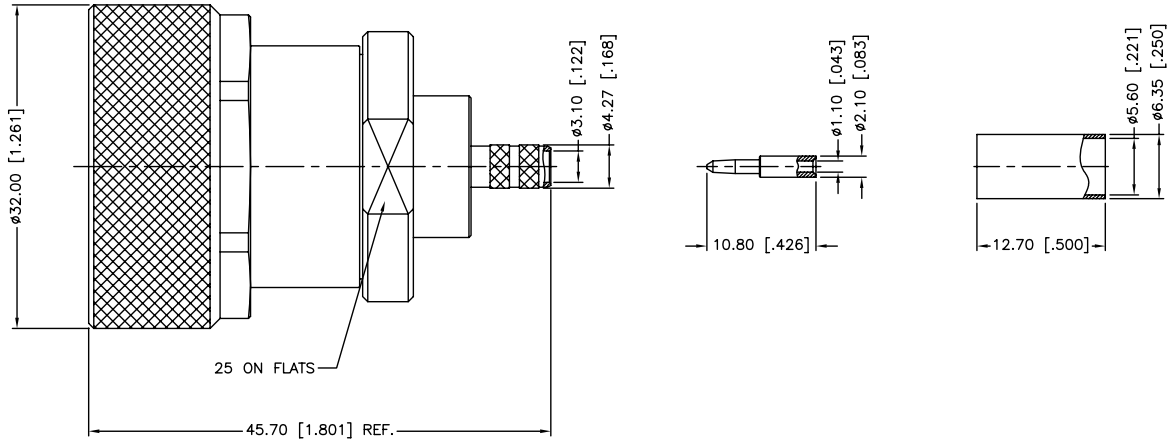

1. CRIMPED FERRULE  
HEX CRIMP SIZE .213"
2. CRIMPED CONTACT PIN  
HEX CRIMP SIZE .068"  
OR CONTACT PIN TO SOLDER

QTY	FINISH	MATERIAL	DESCRIPTION
1	NEXCOTE	BRASS	FERRULE
1	SILVER	BRASS	CONTACT PIN
1	NEXCOTE	BRASS	SHEEL
1	RED	SILICONE	GASKET
1	NEXCOTE	BRASS	CONTACT BODY
1	RED	SILICONE	GASKET
1	SILVER	BER. COPPER	CONTACT PIN
1	NATURAL	PTFE	INSULATOR
1	NEXCOTE	BRASS	BARREL
			DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	06/24/09
CHECKED	
ISSUED	
SHEET 1 OF 1	

<p style="text-align: center;"><b>Amphenol Connex</b></p> <p style="text-align: center;">7/16 CRIMP PLUG (FOR RG-55/U,142A/U,223/U,400/U)</p>	
PART NO.	272104
DWG. NO.	272104.DWG
REV.	D
SIZE	A
SCALE	NA