




Heyco® Thick Panel Snap Bushings

PANEL DIMENSIONS				PART NO.	DESCRIPTION	PART DIMENSIONS					
Maximum Thickness		Mounting Hole Diameter				A	B		C		
in.	mm.	in.	mm.	Black	Inside Diameter	Head Diameter	Overall Height				
.172	4,4	.375	9,5	2017*	SB 375-281	.281	7,1	.468	11,9	.406	10,3
.250	6,4	.500	12,7	3126	SBT-500-6	.391	9,9	.578	14,7	.562	14,3
.250	7,1	.625	15,9	2830*	SB 625-500	.500	12,7	.703	17,9	.531	13,5
.250	6,4	.750	19,1	2840*	SB 750-625	.625	15,9	.828	21,0	.531	13,5
.250	6,4	.875	22,2	3104	SBT-875-11	.687	17,5	.953	24,2	.562	14,3
.250	6,4	1.000	25,4	3108	SBT-1000-12	.766	19,4	1.125	28,6	.562	14,3
.250	6,4	1.093-1.125	27,8-28,6	3128	SBT-1093-15	.937	23,8	1.218	30,9	.562	14,3
.250	6,4	1.187	30,2	3130	SBT-1187-15	.937	23,8	1.312	33,3	.562	14,3
.250	6,4	1.250	31,8	3132	SBT-1250-16	1.000	25,4	1.310	33,2	.562	14,3
.250	6,4	1.375	34,9	3110	SBT-1375-16	1.000	25,4	1.500	38,1	.562	14,3
.250	6,4	1.500	38,1	3112	SBT-1500-21	1.312	33,3	1.620	41,2	.562	14,3
.250	6,4	1.750	44,5	3114	SBT-1750-22	1.375	34,9	1.875	47,6	.562	14,3
.250	6,4	2.000	50,8	3116	SBT-2000-26	1.625	41,3	2.125	54,0	.562	14,3

Standard color black. Consult Heyco for white and other colors.
 Locking fingers in fractional increments up to the maximum panel thickness.
 *Depicts single panel design.

- For use in mounting panels up to 1/4" thick
- Converts raw-edged holes to smooth, neat, insulated holes.
- Locking fingers snap into holes with fingertip pressure.
- Withstands a push back force of greater than 35 pounds.
- Insulates and mechanically protects electrical and telecommunications cables, tubing, hose, rope, and utility lines.
- Available in multiple sizes for use in .500" (12,7 mm) to 2.000" (50,8 mm) diameter holes.

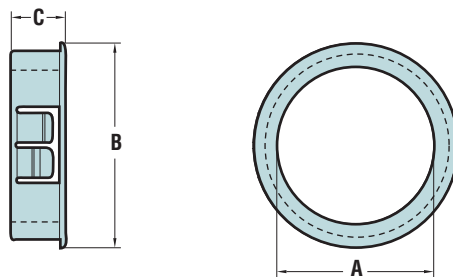

Material	6/6 Nylon
Certifications	Recognized under the Component Program of Underwriters' Laboratories, File E15331 Certified by Canadian Standards Association, File LR8919
Flammability Rating	94V-2
Material Temperature Index	257°F (125°C)—Maximum temperature on part not to exceed 221°F (105°C)

Quick Specs